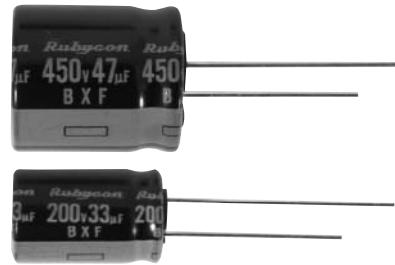


BXF SERIES

NEW

Load Life: 105°C10000 Hours.**◆ FEATURES**

- 20mm height.
- RoHS compliance.
- High Ripple Current.
- For Electronic Ballast, Power Supply.

**◆ SPECIFICATIONS**

| Items | Characteristics | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|--|------|------|------|------|------|--|--------------------|-----------------------------------|-----|-----|-----|-----|-----|--------------------------------|--|------|------|------|------|------|-----------------|------------------------------------|--|--|--|--|--|
| Category Temperature Range | -25~+105°C | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Rated Voltage Range | 160~450V.DC | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Capacitance Tolerance | ±20% (20°C, 120Hz) | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Leakage Current(MAX) | $I=0.04CV+100\mu A$ (After 1 minute application of rated voltage) $I=0.02CV+25\mu A$ (After 5 minutes application of rated voltage) I =Leakage Current(μA) C =Rated Capacitance(μF) V =Rated Voltage(V) | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| (tan δ) Dissipation Factor(MAX) | <table border="1"> <tr> <td></td><td>160</td><td>200</td><td>250</td><td>350</td><td>400</td><td>450</td></tr> <tr> <td>tan δ</td><td>0.15</td><td>0.15</td><td>0.15</td><td>0.20</td><td>0.20</td><td>0.20</td></tr> </table> (20°C, 120Hz) | | | | | | | | 160 | 200 | 250 | 350 | 400 | 450 | tan δ | 0.15 | 0.15 | 0.15 | 0.20 | 0.20 | 0.20 | | | | | | | |
| | 160 | 200 | 250 | 350 | 400 | 450 | | | | | | | | | | | | | | | | | | | | | | |
| tan δ | 0.15 | 0.15 | 0.15 | 0.20 | 0.20 | 0.20 | | | | | | | | | | | | | | | | | | | | | | |
| Endurance | <p>After applying rated voltage with rated ripple current for 10000hrs at 105°C, the capacitors shall meet the following requirement.</p> <table border="1"> <tr> <td>Capacitance Change</td><td colspan="6">Within ±25% of the initial value.</td></tr> <tr> <td>Dissipation Factor</td><td colspan="6">Not more than 200% of the specified value.</td></tr> <tr> <td>Leakage Current</td><td colspan="6">Not more than the specified value.</td></tr> </table> | | | | | | | Capacitance Change | Within ±25% of the initial value. | | | | | | Dissipation Factor | Not more than 200% of the specified value. | | | | | | Leakage Current | Not more than the specified value. | | | | | |
| Capacitance Change | Within ±25% of the initial value. | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Dissipation Factor | Not more than 200% of the specified value. | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Leakage Current | Not more than the specified value. | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Low Temperature Stability Impedance Ratio(MAX) | <table border="1"> <tr> <td>Rated Voltage(V)</td><td>160</td><td>200</td><td>250</td><td>350</td><td>400</td><td>450</td></tr> <tr> <td>$Z(-25^\circ C)/Z(20^\circ C)$</td><td>3</td><td>3</td><td>3</td><td>6</td><td>6</td><td>6</td></tr> </table> (120Hz) | | | | | | | Rated Voltage(V) | 160 | 200 | 250 | 350 | 400 | 450 | $Z(-25^\circ C)/Z(20^\circ C)$ | 3 | 3 | 3 | 6 | 6 | 6 | | | | | | | |
| Rated Voltage(V) | 160 | 200 | 250 | 350 | 400 | 450 | | | | | | | | | | | | | | | | | | | | | | |
| $Z(-25^\circ C)/Z(20^\circ C)$ | 3 | 3 | 3 | 6 | 6 | 6 | | | | | | | | | | | | | | | | | | | | | | |

◆ MULTIPLIER FOR RIPPLE CURRENT

Frequency coefficient


| Frequency (Hz) | | 120 | 1k | 10k | ≥100k |
|----------------|------------|------|------|------|-------|
| Coefficient | 10~18 μF | 0.30 | 0.60 | 0.90 | 1.00 |
| | 22~82 μF | 0.40 | 0.70 | 0.90 | 1.00 |
| | 100~220 μF | 0.45 | 0.75 | 0.90 | 1.00 |

◆ PART NUMBER

| | | | | | | |
|---------------|--------|-------------------|-----------------------|--------|--------------|-----------|
| □□□ | BXF | □□□□□ | □ | □□□ | □□ | DXL |
| Rated Voltage | Series | Rated Capacitance | Capacitance Tolerance | Option | Lead Forming | Case Size |

◆DIMENSIONS

(mm)

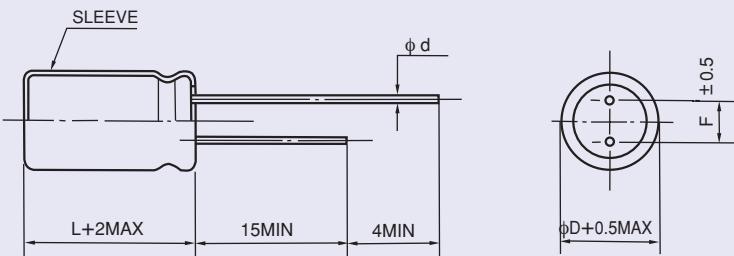

| | | | | |
|-----|-----|------|-----|----|
| ϕ D | 10 | 12.5 | 16 | 18 |
| ϕ d | 0.6 | | 0.8 | |
| F | 5.0 | | 7.5 | |

◆STANDARD SIZE

Size ϕ D×L(mm), Ripple Current (mA r.m.s./105°C, 100kHz)

| WV (V.DC) | Cap (μF) | Size | Ripple |
|-------------|----------|---------|--------|
| 160 (2C) | 47 | 10×16 | 650 |
| | 68 | 10×20 | 800 |
| | 82 | 16×16 | 1350 |
| | 100 | 12.5×20 | 1350 |
| | 100 | 18×16 | 1550 |
| | 180 | 16×20 | 1800 |
| | 220 | 18×20 | 2250 |
| 200 (2D) | 33 | 10×16 | 650 |
| | 47 | 10×20 | 800 |
| | 56 | 16×16 | 1350 |
| | 68 | 12.5×20 | 1350 |
| | 82 | 18×16 | 1550 |
| | 120 | 16×20 | 1800 |
| | 180 | 18×20 | 2250 |
| 250 (2E) | 27 | 10×16 | 650 |
| | 39 | 10×20 | 800 |
| | 47 | 16×16 | 1350 |
| | 56 | 12.5×20 | 1350 |
| | 56 | 18×16 | 1550 |
| | 100 | 16×20 | 1800 |
| | 120 | 18×20 | 2250 |

| WV (V.DC) | Cap (μF) | Size | Ripple |
|-------------|----------|---------|--------|
| 350 (2V) | 18 | 10×16 | 450 |
| | 22 | 10×20 | 500 |
| | 27 | 16×16 | 780 |
| | 33 | 12.5×20 | 850 |
| | 33 | 18×16 | 960 |
| | 56 | 16×20 | 1200 |
| | 82 | 18×20 | 1300 |
| 400 (2G) | 12 | 10×16 | 450 |
| | 18 | 10×20 | 500 |
| | 18 | 16×16 | 780 |
| | 27 | 12.5×20 | 850 |
| | 27 | 18×16 | 960 |
| | 47 | 16×20 | 1200 |
| | 56 | 18×20 | 1300 |
| 450 (2W) | 10 | 10×16 | 350 |
| | 15 | 10×20 | 400 |
| | 15 | 16×16 | 700 |
| | 22 | 12.5×20 | 700 |
| | 22 | 18×16 | 850 |
| | 33 | 16×20 | 970 |
| | 47 | 18×20 | 1170 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Aluminum Electrolytic Capacitors - Leaded category:

Click to view products by Rubycon manufacturer:

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [MAL203125221E3](#) [MAL204216159E3](#) [ESMG101ETD100MF11S](#) [RBC-25V-10UF-4X7](#) [RE3-35V222MJ6#](#) [RFO-100V471MJ7P#](#) [B41041A2687M8](#) [B41041A7226M8](#) [B41044A7157M6](#) [EKRG250ELL100MD07D](#) [EKXG201EC3101ML20S](#) [EKXG351ETD6R8MJ16S](#) [EKZM160ETD471MHB5D](#) [EPA-201ELL151MM25S](#) [NCD681K10KVY5PF](#) [NRLF103M25V35X20F](#) [KM4700/16](#) [KME50VB100M-8X11.5](#) [RXJ222M1EBK-1625](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESX472M16B](#) [MAL211929479E3](#) [40D506F050DF5A](#) [TE1202E](#) [36DA273F050BB2A](#) [KME25VB100M-6.3X11](#) [511D336M250EK5D](#) [511D337M035CG4D](#) [515D477M035CG8PE3](#) [052687X](#) [EKMA500ELL4R7ME07D](#) [EKRG100ETC221MF09D](#) [NRE-S560M16V6.3X7TBSTF](#) [ERZA630VHN182UP54N](#) [MAL214099813E3](#) [MAL211990518E3](#) [MAL204281229E3](#) [NEV680M35EF](#) [686KXM050M](#) [ERS1VM222L30OT](#) [EGW2GM150W16OT](#) [EGS2GM6R8G12OC](#) [EHS2GM220W20OT](#) [ERF1VM222L30OT](#) [ERF1KM151G20OT](#) [EKZE500ELL101MHB5D](#) [EKMM251VSN221MP25S](#) [RGA221M1HBK-1016G](#)