

# DG100

## Multi-service Edge IoT Gateway

### Highlights


- Ultra compact and efficient
- Multi-Interface access
- Internal open standard mikroBUS™ socket
- Wi-Fi and Bluetooth connectivity
- LED indications for data and status
- IoT Ready with field protocol support
- Easily configurable with WebUI
- Linux and IoT Edge Device SDK
- Programable in C++ or JavaScript
- Modular, open platform for proprietary solutions
- Personalization and customization options are available upon request



DG100 device

### Description


DG100 is compact and efficient Multi-service IoT Edge Gateway for home, office and industrial applications. Powered by NXP i.MX6 CPU at 900MHz, with 256MB of SRAM memory and 4GB of eMMC, it offers great performance for great variety of next generation solutions. Robustness are guaranteed by wide range of power supply voltage with transient/surge/noise/reverse polarity protection and reliable hardware watchdog timer.

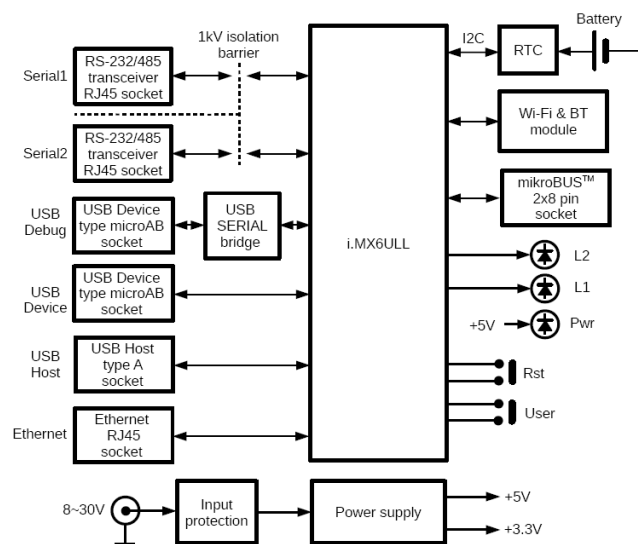

Block diagram

Device provides powerful combination of interfaces and is ideally suited for M2M and IoT to connect sensors, actuators and other devices to cloud services. Two protected and isolated serial ports, both with RS-232 and RS-485 interfaces, offers connection to serial enabled devices such as: PLC's, pump controllers, HMI's or remote I/O devices. Embedded wireless connectivity with Wi-Fi and Bluetooth, three USB and one Ethernet port fulfil the needs for local and remote connectivity.

On board mikroBUS™ socket, placed inside enclosure, may be used for add-on boards and enable easy hardware expandability with a large number of standardized compact add-on boards, each one carrying a single sensor, transceiver, display, encoder, motor driver, connection port, or any other electronic module or integrated circuit.

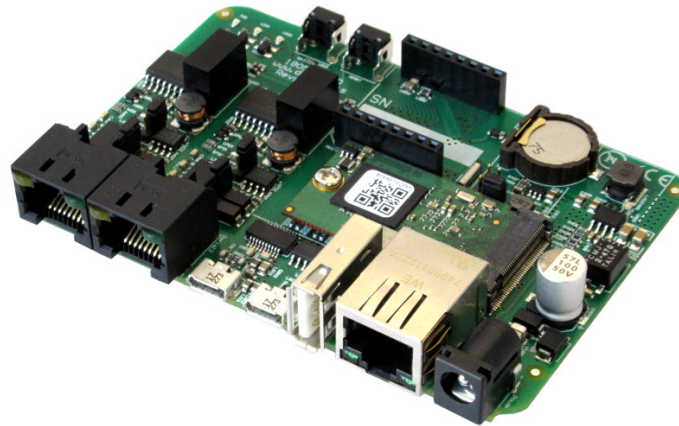


*DG100 board*

DG100 comes with preinstalled Linux OS and macchina.io IoT edge device framework which takes the complexity out of integrating sensors, actuators, devices and cloud services, as well as device management. This framework is right solution when performance, low footprint, efficiency and security counts, supporting variety of field and IoT protocols and devices such as Modbus, MQTT, BtLE, GNSS or SensorTag. Built-in web server providing UI for device management and parametrization.

The DG100 enclosure is made of durable ABS plastic for desktop or wall mounting in home, office or industrial environment. The side panel features power supply connector, connectors for USB peripherals, Ethernet and serial communication, as well as LED indicators.

## Application

DG100 provides seamless integration of new IoT enabled devices together with legacy devices to cloud services via HTTPS/REST or MQTT. This provide to users a lot of useful data from massive array of equipment, like motors, pumps, factory tools, HVAC units, vending machines, and much more.

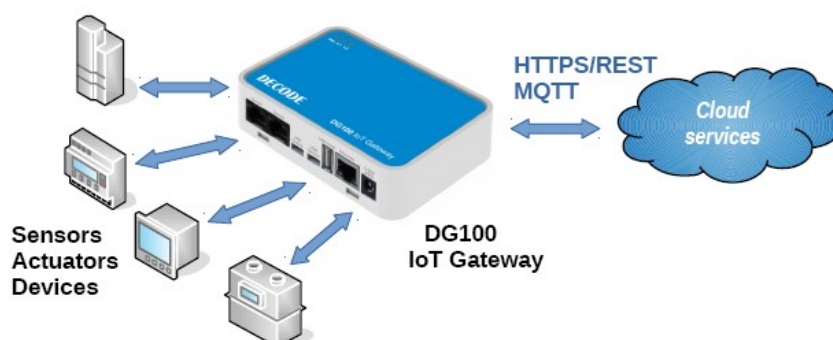

*Application diagram*

## Technical specification

PROCESSOR BOARD	
Central processor	32-Bit MCU Single Core, ARM A7, i.MX6ULL, 900MHz
Memory	256MB DDR3 SDRAM (up to 512MB factory option)
Storage	eMMC 4GB Flash (up to 32GB factory option)
USB	1 x USB2.0 Hi-Speed Host, 1 x Device
USB Debug	1 x USB2.0 device, galvanically isolated, FT232R
Ethernet	RJ45, 10/100TBase
Real Time Clock (RTC)	Implemented (powered by a CR1220 battery)
Serial ports	
Serial ports	2 x RS-232C (TD, RD, RTS, CTS signals) and RS-485 (A+ & B-) Galvanically isolated to 1kV with send and receive LED indicators
Wireless	
WiFi	Single-band 2.4 GHz IEEE 802.11b/g/n
Bluetooth	BT 4.1 (Low Energy compatible)
COMMON CHARACTERISTICS	
Power supply	8~30V DC
Power consumption	1W Typical, 15W Max
Enclosure protection	IP40
Temperature range	from 0°C to +55°C and from 0 to 95% RH (without condensation) (industry option available from -20°C to +65°C)
Dimensions	110 x 76 x 27mm
Mounting	Desktop, Wallmount
Software	
OS	Linux Buildroot 4.17.4 or Yocto 4.9.88
SDK	Buldroot-based Eclipse Tooling
IoT Framework	macchina.io C++ and JavaScript IoT Edge Device SDK

## Scope of supply

Model	SKU	Description	Pcs.
DG100	1xxxx	Multi-service Edge IoT Gateway	1

## DECODE d.o.o.

Bulevar Nikole Tesle 30A

11080 Novi Beograd

Telefon +381 11 311 0027

Telefax +381 11 311 0027

E-Mail [info@decode.rs](mailto:info@decode.rs)

Internet [www.decode.rs](http://www.decode.rs)

## Legal notice

Reproduction, transfer, distribution or storage of part or all of the contents in this document in any form without the prior written permission is prohibited. All rights reserved. All trademarks mentioned herein belong to their respective owners.

**Copyright © 2019 Decode**

## Disclaimer

Decode has used reasonable care in preparing the information included in this document, but does not warrant that such information is error free.

Decode, its associates, representatives, employees, and others acting on its behalf disclaim any and all liability for errors, inaccuracies, or incompleteness contained in any datasheet or in any other disclosure relating to any product.

In the interest of continuous product development, the Decode reserves the right to make improvements to this manual and the products described in it at any time and without prior notification or obligation.

The use of the product is at sole discretion of the user. Decode cannot be held responsible for any damages arising due to use of this product and makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product.

Note: The specifications in this document are valid as of the listed versions of software and/or hardware. Revised versions of this document, as well as software and driver updates are available in the download area of the Decode web site.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bluetooth Modules - 802.15.1 category](#):*

*Click to view products by [DECODE manufacturer](#):*

Other Similar products are found below :

[A2541R24A10GM](#) [CYBLE-212023-10](#) [BM78SPP05MC2-0002AA](#) [CYW20732S](#) [968EMB0019](#) [E73-2G4M08S1CX](#) [TB-03F-AT\\_Mesh](#)  
[SPB228-D-1](#) [88980124](#) [NINA-B222-03B](#) [1327](#) [RN42HID-I/RM](#) [ENW-89829C3KF](#) [BLE113-A-V1](#) [SPBTLE-RFTR](#) [BM70BLE01FC2-](#)  
[0B03AA](#) [ACN52832](#) [A2541E24A10GM](#) [450-0168R](#) [MOTG-BLUETOOTH](#) [ABBTM-2.4GHz-52-T](#) [ABBTM-2.4GHz-T](#) [ABBTM-2.4GHz-](#)  
[T2](#) [ACN52840](#) [4076](#) [4077](#) [AFERO-BL24-01](#) [BLED112](#) [BM62SPKS1MC2-0001AA](#) [BM78SPPS5MC2-0002AA](#) [PX0880/1](#) [DAT12](#) [DG100](#)  
[IOT EDGE GATEWAY](#) [ENW49D01A1KF](#) [ENW89857A1KF](#) [BT680F](#) [PBA31309V1.00 S](#) [LK64](#) [ATSAMB11-MR510CA](#)  
[BM20SPKA1NBC-0001AA](#) [BM20SPKS1NBC-0001AA](#) [BM23SPKS1NB9-0B02AA](#) [BM70BLE01FC2-0B04AA](#) [BM77SPP03MC2-0007AA](#)  
[BM77SPP03MC2-0008AA](#) [BM78SPPS5NC2-0002AA](#) [BM83SM1-00TA](#) [DM164146](#) [RN42NU-IRM](#) [RN42U-I/RM](#) [RN42XVP-I/RM](#)