

**BXF SERIES**
**Load Life : 105°C 10000 hours.**
**◆FEATURES**

- 20mm height Max.
- High Ripple Current.
- For Electronic Ballast, Power Supply.
- RoHS compliance.


**◆SPECIFICATIONS**

Items	Characteristics														
Category Temperature Range	-25~+105°C														
Rated Voltage Range	160~450V.DC														
Capacitance Tolerance	±20% (20°C, 120Hz)														
Leakage Current(MAX)	$I=0.04CV+100\mu A$ (After 1 minute application of rated voltage) $I=0.02CV+25\mu A$ (After 5 minutes application of rated voltage) $I$ =Leakage Current( $\mu A$ ) $C$ =Capacitance( $\mu F$ ) $V$ =Rated Voltage(V)														
Dissipation Factor(MAX) (tan $\delta$ )	<table border="1"> <thead> <tr> <th>Rated Voltage (V)</th> <th>160</th> <th>200</th> <th>250</th> <th>350</th> <th>400</th> <th>450</th> </tr> </thead> <tbody> <tr> <td>tan<math>\delta</math></td> <td>0.15</td> <td>0.15</td> <td>0.15</td> <td>0.20</td> <td>0.20</td> <td>0.20</td> </tr> </tbody> </table> (20°C, 120Hz)	Rated Voltage (V)	160	200	250	350	400	450	tan $\delta$	0.15	0.15	0.15	0.20	0.20	0.20
Rated Voltage (V)	160	200	250	350	400	450									
tan $\delta$	0.15	0.15	0.15	0.20	0.20	0.20									
Endurance	After applying voltage with rated ripple current for 10000 hours at 105°C, the capacitors shall meet the following requirement. <table border="1"> <tbody> <tr> <td>Capacitance Change</td> <td>Within ±25% of the initial value.</td> </tr> <tr> <td>Dissipation Factor</td> <td>Not more than 200% of the specified value.</td> </tr> <tr> <td>Leakage Current</td> <td>Not more than the specified value.</td> </tr> </tbody> </table>	Capacitance Change	Within ±25% of the initial value.	Dissipation Factor	Not more than 200% of the specified value.	Leakage Current	Not more than the specified value.								
Capacitance Change	Within ±25% of the initial value.														
Dissipation Factor	Not more than 200% of the specified value.														
Leakage Current	Not more than the specified value.														
Low Temperature Stability Impedance Ratio(MAX)	<table border="1"> <thead> <tr> <th>Rated Voltage (V)</th> <th>160</th> <th>200</th> <th>250</th> <th>350</th> <th>400</th> <th>450</th> </tr> </thead> <tbody> <tr> <td>Z(-25°C)/Z(20°C)</td> <td>3</td> <td>3</td> <td>3</td> <td>6</td> <td>6</td> <td>6</td> </tr> </tbody> </table> (120Hz)	Rated Voltage (V)	160	200	250	350	400	450	Z(-25°C)/Z(20°C)	3	3	3	6	6	6
Rated Voltage (V)	160	200	250	350	400	450									
Z(-25°C)/Z(20°C)	3	3	3	6	6	6									

**◆MULTIPLIER FOR RIPPLE CURRENT**

Frequency (Hz)		120	1k	10k	100k $\leq$
Coefficient	10~18 $\mu F$	0.30	0.60	0.90	1.00
	22~82 $\mu F$	0.40	0.70	0.90	1.00
	100~220 $\mu F$	0.45	0.75	0.90	1.00

**◆OPTION**


	Code
PET Sleeve	Blank

**◆PART NUMBER**

<u>  </u> <u>  </u> <u>  </u>	<u>  </u> <u>  </u> <u>  </u>	<u>  </u> <u>  </u> <u>  </u> <u>  </u> <u>  </u> <u>  </u>	<u>  </u> <u>  </u> <u>  </u>	<u>  </u> <u>  </u> <u>  </u>	<u>  </u> <u>  </u>	<u>  </u> <u>  </u> <u>  </u> <u>  </u>
Rated Voltage	Series	Capacitance	Capacitance Tolerance	Option	Lead Forming	Case Size

**◆ DIMENSIONS**

(mm)

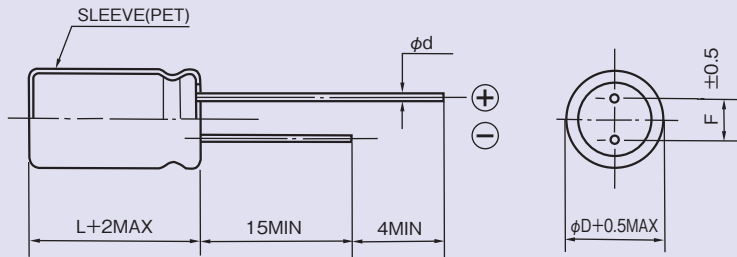

$\phi D$	10	12.5	16	18
$\phi d$	0.6		0.8	
F	5.0		7.5	

**◆ STANDARD SIZE**

Size  $\phi D \times L$ (mm), Ripple Current (mA r.m.s./105°C, 100kHz)

V.DC	Cap( $\mu F$ )	Size	Ripple
160 (2C)	47	10×16	650
	68	10×20	800
	82	16×16	1350
	100	12.5×20	1350
	100	18×16	1550
	180	16×20	1800
	220	18×20	2250
200 (2D)	33	10×16	650
	47	10×20	800
	56	16×16	1350
	68	12.5×20	1350
	82	18×16	1550
	120	16×20	1800
	180	18×20	2250
250 (2E)	27	10×16	650
	39	10×20	800
	47	16×16	1350
	56	12.5×20	1350
	56	18×16	1550
	100	16×20	1800
	120	18×20	2250

V.DC	Cap( $\mu F$ )	Size	Ripple
350 (2V)	18	10×16	450
	22	10×20	500
	27	16×16	780
	33	12.5×20	850
	33	18×16	960
	56	16×20	1200
	82	18×20	1300
	12	10×16	450
400 (2G)	18	10×20	500
	18	16×16	780
	27	12.5×20	850
	27	18×16	960
	47	16×20	1200
	56	18×20	1300
	10	10×16	350
450 (2W)	15	10×20	400
	15	16×16	700
	22	12.5×20	700
	22	18×16	850
	33	16×20	970
	47	18×20	1170

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Aluminum Electrolytic Capacitors - Leaded](#) category:*

*Click to view products by [Rubycon](#) manufacturer:*

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [MAL203125221E3](#) [MAL204216159E3](#) [ESMG101ETD100MF11S](#) [RBC-25V-10UF-4X7](#) [RE3-35V222MJ6#](#) [RFO-100V471MJ7P#](#) [B41041A2687M8](#) [B41041A7226M8](#) [B41044A7157M6](#) [EKRG250ELL100MD07D](#) [EKXG201EC3101ML20S](#)  
[EKXG351ETD6R8MJ16S](#) [EKZM160ETD471MHB5D](#) [EPA-201ELL151MM25S](#) [NCD681K10KVY5PF](#) [NRLF103M25V35X20F](#)  
[KM4700/16](#) [KME50VB100M-8X11.5](#) [RXJ222M1EBK-1625](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESX472M16B](#) [MAL211929479E3](#)  
[40D506F050DF5A](#) [TE1202E](#) [36DA273F050BB2A](#) [KME25VB100M-6.3X11](#) [511D336M250EK5D](#) [511D337M035CG4D](#)  
[515D477M035CG8PE3](#) [052687X](#) [EKMA500ELL4R7ME07D](#) [EKRG100ETC221MF09D](#) [NRE-S560M16V6.3X7TBSTF](#)  
[ERZA630VHN182UP54N](#) [MAL214099813E3](#) [MAL211990518E3](#) [MAL204281229E3](#) [NEV680M35EF](#) [686KXM050M](#) [ERS1VM222L30OT](#)  
[EGW2GM150W16OT](#) [EGS2GM6R8G12OC](#) [EHS2GM220W20OT](#) [ERF1VM222L30OT](#) [ERF1KM151G20OT](#) [EKZE500ELL101MHB5D](#)  
[EKMM251VSN221MP25S](#) [RGA221M1HBK-1016G](#)