




Made in the United States of America



MODE 1



MODE 2



MODE 3

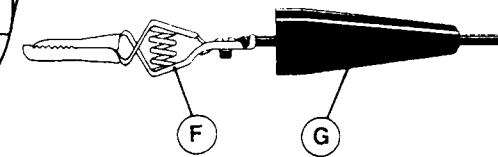

MODE 1: Continuity tester for unpowered circuits. 0-10 ohms; uses the Menda [35121](#) lamp and two AAA batteries (not supplied).

MODE 2: Voltage tester for 60-600 volts AC or DC; uses the neon cartridge and no batteries.

MODE 3: Voltage tester for 0-60 volts AC or DC; uses the Menda [35121](#) lamp and no batteries.

- A. Probe tip (included)
- B. Menda [35121](#) (included) - For use in Modes 1 and 3. Operates from 2 to 3 volts in Mode 3.
- C. Neon Cartridge (included) - For use in Mode 2.
- D. Two AAA batteries (not included) - For use in Mode 1
- E. Three point washer rides on internal steps in handle. Slides to lower position for Mode 1; upper position for Modes 2 and 3.
- F. The other end of the 3 ft wire lead is terminated with a #85 Mueller ground clip.
- G. Black insulator over clip for high voltage applications.
- H. Wire is 0.1" high flex 105 strand copper with black PVC insulated jacket; 3' length
- I. Clear butyrate window provides a 360° view of the indicator light

Specifications and procedures subject to change without notice.

CIRCUITRACER® CONTINUITY AND VOLTAGE TESTER

MENDA

3651 WALNUT AVENUE, CHINO, CA 91710
PHONE: (909) 627-2453 FAX: (909) 627-7449
WEBSITE: MendaPump.com

**DRAWING
NUMBER**
35100

DATE
October
2017

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Component Testers](#) category:

Click to view products by [Desco](#) manufacturer:

Other Similar products are found below :

[410-413](#) [FLUKE 9062](#) [2840](#) [2841](#) [570A](#) [35135](#) [815](#) [FLUKE-9040EUR](#) [881](#) [891](#) [895](#) [880-220V](#) [AK57X](#) [770734](#) [LCR200](#) [PRT200](#)
[UM200](#) [T5-H5-1AC-KIT/US](#) [69127](#) [ET40](#) [ET45](#) [ET45VP](#) [ET60](#) [HVNCVT-1](#) [NCVT2P](#) [NCVT2PKIT](#) [NCVT3P](#) [NCVT-6](#) [RT110](#) [RT210](#)
[RT250](#) [RT310](#) [35100](#) [35130](#) [VS-AVT-C02-L03](#) [1212598](#) [T3LCR1002](#) [T3LCR1300](#) [T3LCR1100](#) [VS-AVT-RKBB2](#) [VS-AVT-RKBB3](#) [VS-](#)
[AVT-RKBB4](#) [NCVT-4IR](#) [LCR55A](#) [ET30B](#) [ET40B](#) [VS-AVT-C08-L10](#) [ET26B](#) [ET23B](#) [ET60](#)