

- Low-profile version of industry-standard HC49
- Available as HUS (3.5mm height) and HUSL (2.5mm height)
- low cost and light weight
- High frequency fundamental mode is available in BT-Cut



DESCRIPTION

HUS crystals share the same base outline as the industry-standard HC49 crystal. The crystal uses an AT-cut strip crystal with an hermetically sealed can. HUS crystals provide a low cost source of system clock frequency.


SPECIFICATION

Frequency Range:	3.2MHz to 70.0MHz
Oscillation Mode	
AT-Cut Fundamental:	3.2MHz to 48.0MHz
BT-Cut Fundamental:	24.0MHz to 48.0MHz
AT-Cut 3rd Overtone:	27.0MHz to 70.0MHz
Calibration Tolerance at 25°C	
AT-Cut:	±5, ±10, ±20 or ±30ppm
Frequency Stability:	See table
Load Capacitance (CL):	Series or from 8pF to 32pF
Ageing at 25°C:	±3ppm maximum, 1st year, ±1ppm per year thereafter.
Drive Level:	100µWatts typ., 500µWatts max.
Storage Temperature Range:	-50° to +105°C
Crystal Holder:	Resistance-weld hermetic seal
RoHS Status:	RoHS Compliant and pB free
Supply format:	Bulk pack


ESR and OSCILLATION MODE

Frequency Range MHz	Crystal Cut/ Oscill. Mode	ESR Ω Max.
3.2 ~ 3.4	AT-Fund	300
3.5 ~ 6.0	AT-Fund	120
6.1 ~ 10.0	AT-Fund	60
10.1 ~ 30.0	AT-Fund	40
24.0 ~ 48.0	BT-Fund	40
27.0 ~ 30.0	AT-3rd OT	150
30.1 ~ 50.0	AT-3rd OT	100
50.1 ~ 70.0	AT-3rd OT	80

OUTLINE & DIMENSIONS

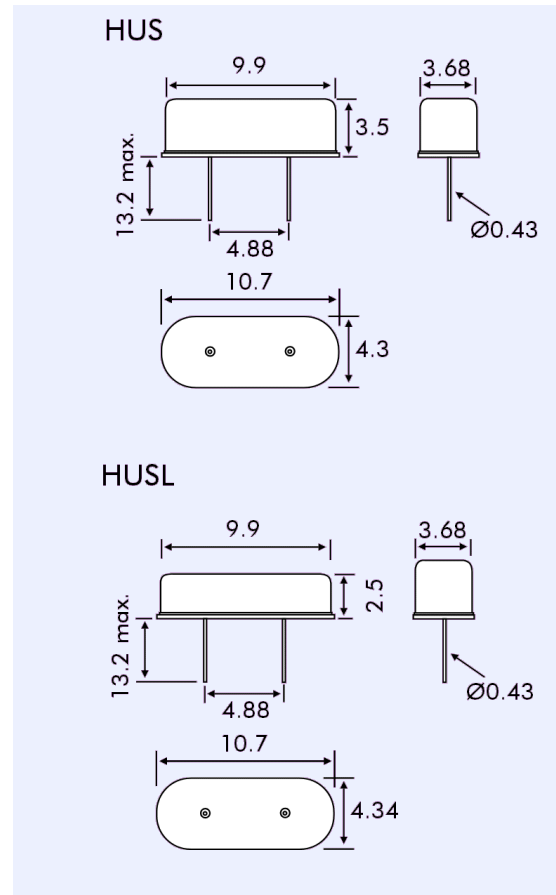

PART NUMBER FORMAT

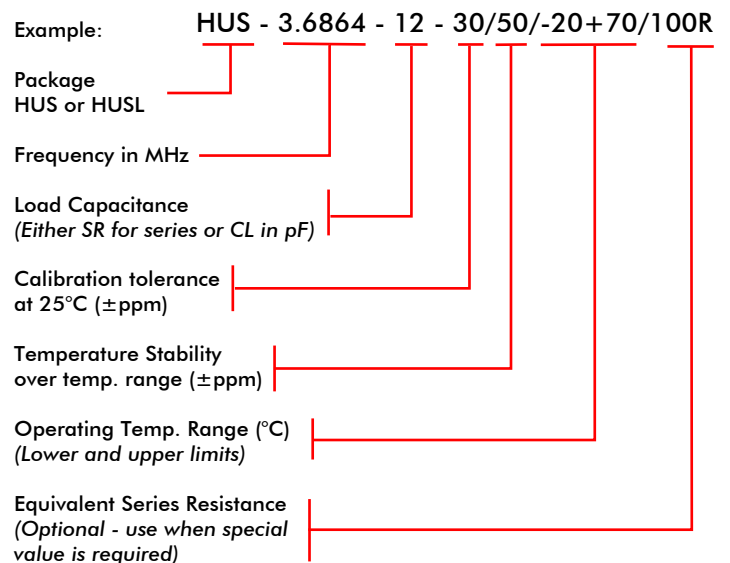

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for mercury united manufacturer:

Other Similar products are found below :

[H49-4.000-18-30/50/-40+85](#) [3H53ET-20.000](#) [H49-24.576-18-30/50/-40+85](#) [X32-25.000-12-30/30/-40+85](#) [HUS-10.000-18-30/50/-40+85](#)
[HUS-4.194304-18-30/50/-40+85](#) [H49-11.0592-18-30/50/-40+85](#) [MJ-25.000-12-30/30/-40+85](#) [H49-27.000-18-30/50/-40+85](#) [HUS-](#)
[12.000-18-30/50/-40+85](#) [H49-14.31818-18-30/50/-40+85](#) [H49-16.384-18-30/50/-40+85](#) [3H32ET-10.000](#) [3H53ET-40.000](#) [3H32ET-20.000](#)
[H49-7.3728-18-30/50/-40+85](#) [3SWOET-10.000](#) [HUS-14.31818-18-30/50/-40+85](#) [H49-24.000-18-30/50/-40+85](#) [H49-25.000-18-30/50/-40+85](#)
[M49-24.576-18-30/50/-40+85](#) [X21-26.000-12-30/30/-40+85](#) [H49-9.8304-18-30/50/-40+85](#) [HUS-7.3728-18-30/50/-40+85](#) [X21-](#)
[20.000-12-30/30/-40+85](#) [3H53ET-24.000](#) [MP24G-12.000-18P-30/50/X/80R](#)