

# Rabbit® 4000

Low-EMI, High-Performance Microprocessor

High-performance, low-EMI microprocessor designed specifically for embedded control, communications and Ethernet connectivity.



## Overview

The Rabbit 4000 offers a host of industrial peripherals along with 1 MB of code support to meet the most demanding applications. The Rabbit 4000 offers on chip Ethernet which reduces overall component costs and optimizes communication performance. Its compact instruction set and high clock speeds give the Rabbit 4000 exceptionally fast math, logic and I/O performance.

The Rabbit 4000 is programmed using the industry-proven Dynamic C® development system. Dynamic C is easy to use, allowing developers to write, compile and test both C and Assembly code without leaving the Dynamic C environment, and no costly in-circuit emulators are required. Full TCP/IP stack with source code is provided royalty-free.

### Complete Solutions



Modules



SBCs




Development Kits

## Dynamic C®

Supported Software Platforms

### Application Highlight

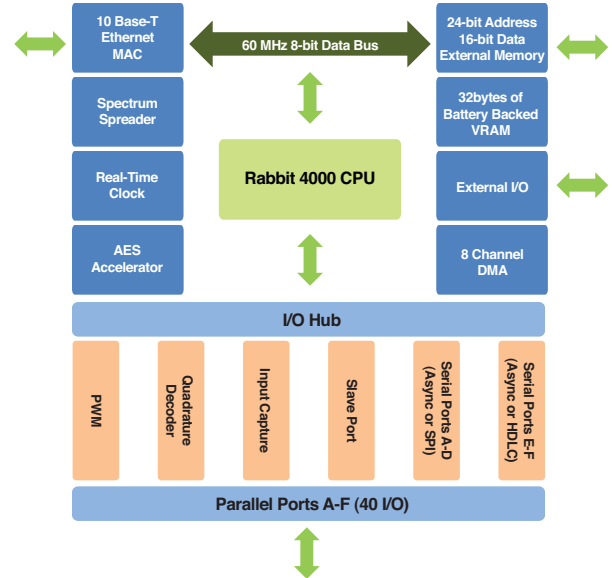


### Features/Benefits

- 60 MHz max clock speed
- Integrated 10Base-T Ethernet
- Supports 8-bit or 16-bit Flash and SRAM memories
- Extended low-power "sleepy" modes
- Watchdog timer
- Battery backed option for protected data storage



Feature	
Packaging	128-pin LQFP
Package Size	16 x 16 x 1.5 mm
Maximum Clock Speed	60 MHz
Operating Voltage	1.8V Core (3.3V I/O) or 1.8V Core and I/O
Ethernet	Integrated 10Base-T Ethernet controller
DMA	8 independent channels with 2 external DMA request inputs
Operating Temperature	-55° C to +85° C
Digital I/O	40+ (arranged in five 8-bit ports)
Serial Ports	6 CMOS-compatible
Baud Rate	Clock speed/8 max asynchronous
Address Bus	24-bit
Data Bus	8/16-bit
Timers	Ten 8-bit, one 10-bit with two match registers, one 16-bit timer
Real-Time Clock	Yes, battery-backable
RTC Oscillator Circuitry	External
Watchdog Timer/Supervisor	Yes
Clock Modes	1x, 2x, /2, /3, /4, /6, /8
Power Down Modes	Sleepy (32 kHz) Ultra-Sleepy (16, 8, 2 kHz)
Auxiliary I/O Bus	8 data, 8 address lines
Pricing	
Part Number (Sample 2-pack)	20-101-1186
Part Number	20-668-0024

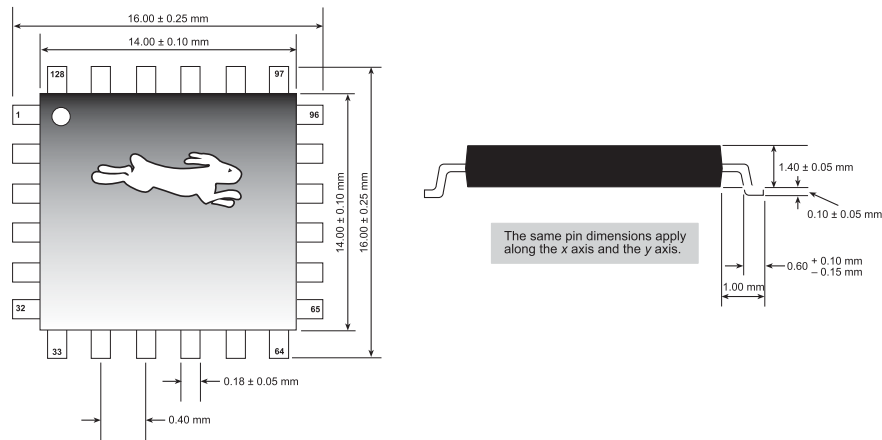

Visit [www.digi.com](http://www.digi.com) for part numbers.

**DIGI SERVICE AND SUPPORT** - You can purchase with confidence knowing that Digi is here to support you with expert technical support and a one-year warranty. [www.digi.com/support](http://www.digi.com/support)

**Digi International**  
877-912-3444  
952-912-3444  
info@digi.com

**Digi International France**  
+33-1-55-61-98-98  
www.digi.fr

**Digi International KK**  
+81-3-5428-0261  
www.digi-intl.co.jp

**Digi International (HK) Limited**  
+852-2833-1008  
www.digi.cn



91001568  
B1/1210

BUY ONLINE • [www.digi.com](http://www.digi.com)



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Microprocessors - MPU category](#):*

*Click to view products by [Digi International manufacturer](#):*

Other Similar products are found below :

[A2C00010998 A](#) [ALXD800EEXJCVD C3](#) [A2C00010729 A](#) [TS68040MF33A](#) [BOXSTCK1A8LFCL](#) [UPD78F0503AMCA-CAB-G](#)  
[Z8018008VEG](#) [LS1021ASN7KQB](#) [T1040NSN7PQB](#) [T2080NXE8PTB](#) [T2080NSE8PTB](#) [CM8063501521600S R19L](#) [T2080NXE8T1B](#)  
[FH8067303534005S R3ZM](#) [R9A07G044L24GBG#AC0](#) [HW8076502640002S R38F](#) [R7S721030VLF#AA0](#) [M0516LBN](#)  
[TEN54LSDV23GME](#) [MPC8315VRAGDA](#) [PIC16F1828-I/SS](#) [PIC16F690T-I/SS](#) [PIC16F727-I/PT](#) [NS7520B-1-I46](#) [AT91SAM9G35-CU](#)  
[AT91SAM9X25-CU](#) [ST7FLIT35F2DAKTR](#) [AM1808EZWT4](#) [GD32F303RCT6](#) [SMS3700HAX4DQE](#) [ADD4200IAA5DOE](#)  
[ST7PLITE05OBXTR](#) [AT91RM9200-CJ-002](#) [AT91RM9200-QU-002](#) [AT91SAM9260B-CU](#) [AT91SAM9CN12B-CFU](#) [AT91SAM9G20B-](#)  
[CFU](#) [AT91SAM9G20B-CU](#) [AT91SAM9G15-CU](#) [ATSAMA5D22A-CU](#) [ATSAMA5D35A-CU](#) [ALXC700EETH2VD C3](#) [AM1707DZKB4](#)  
[SC91F729BD14U](#) [STC15W408AS-35I-DIP16](#) [STC15W204S-35I-DIP16](#) [SC91F72BD20U](#) [SC91F731D20U](#) [SC91F722D20U](#)  
[STC89C516RD+40I-PDIP40](#)