


XBee-PRO[®] 900

Point-to-Multipoint Embedded RF Modules for OEMs

XBee-PRO 900 modules deliver device connectivity with exceptional RF range performance using a fast point-to-multipoint protocol.

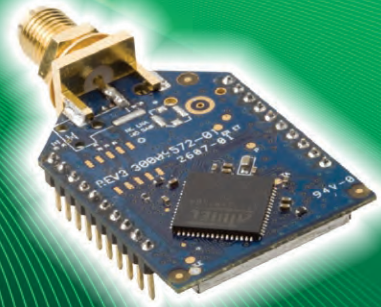


Overview

XBee-PRO 900 embedded RF modules provide extended-range wireless connectivity to end-point devices. These modules use a proprietary 900 MHz point-to-multipoint protocol that balances overall RF performance with a fast 156 Kbps data rate to the end node. Supporting RF line-of-sight distances of up to 6 miles (with high gain antennas), they are ideal for extended-range wireless applications requiring low latency and increased data throughput.

As a part of Digi's XBee[®] family of RF products, these modules are easy to use, share a common hardware footprint, and are fully interoperable with other XBee products utilizing the same technology. They are available in a variety of different protocols to suit different applications, enabling users to substitute one XBee module for another with minimal development time and risk.

Digi's unsurpassed offering of Drop-in Networking products provides users with seamless communication between devices. XBee adapters provide wireless connectivity to electronic devices in wired networks. ConnectPort[™] X gateways enable users to access and configure remote devices in a network.

Application Highlight

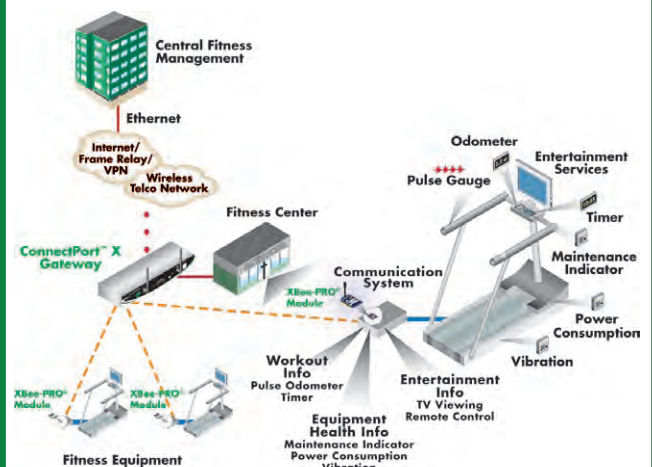


Features/Benefits

- No configuration needed for out-of-the-box RF communications
- Common XBee footprint for a variety of RF modules
- 900 MHz for extended-range operation
- Outdoor RF line-of-sight range up to 6 miles (10 km)
- Fast 156 Kbps RF data rate
- Sleep modes supported for increased battery life
- Multiple antenna options
- Capable of deploying the DigiMesh[™] protocol with a simple firmware change

Related Products



Gateways



Modules



Adapters



Development Kits



Network Extenders



Accessories



Performance

RF Data Rate	156 Kbps
Indoor/Urban Range	450 ft (140 m)
Outdoor/RF Line-of-Sight Range	Up to 1.8 miles (3 km)
Outdoor/RF Line-of-Sight Range w/ High-Gain Antenna	Up to 6 miles (10 km)
Transmit Power	50 mW (+17 dBm)
Receiver Sensitivity (10% PER)	-100 dBm

Features

Serial Data Interface	3.3V CMOS Serial UART (5V tolerant inputs)
Configuration Method	AT & API, local or over-the-air
Frequency Band	900 MHz ISM
Interference Immunity	FHSS
Serial Data Rate	Up to 230 Kbps
ADC Inputs	Coming in future firmware revisions
Digital I/O	Coming in future firmware revisions
Antenna Options	Wired Whip, U.FL connector, RPSMA connector

Networking & Security



Encryption	128-bit AES
Reliable Packet Delivery	Retries/Acknowledgments
Addressing Options	PAN ID, channel, 64-bit address
Channels	8 hopping patterns on 12 channels or single channel

Power Requirements

Supply Voltage	3.0 – 3.6 VDC
Transmit Current	210 mA
Receive Current	80 mA
Power-Down Current	60 uA @ 3.3V

Regulatory Approvals

FCC (USA)	Yes
IC (Canada)	Yes
C-TICK (Australia)	No

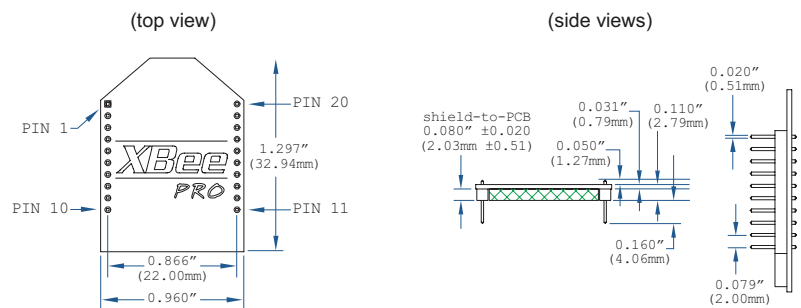

Visit www.digi.com for part numbers.

DIGI SERVICE AND SUPPORT - You can purchase with confidence knowing that Digi is here to support you with expert technical support and a strong five-year warranty. www.digi.com/support

Digi International
877-912-3444
952-912-3444
info@digi.com

Digi International France
+33-1-55-61-98-98
www.digi.fr

Digi International KK
+81-3-5428-0261
www.digi-intl.co.jp

Digi International (HK) Limited
+852-2833-1008
www.digi.cn



91001475
B1/309

BUY ONLINE • www.digi.com



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Zigbee / 802.15.4 Modules](#) category:

Click to view products by [Digi International](#) manufacturer:

Other Similar products are found below :

[GNS802](#) [20848-636](#) [20849-025](#) [20849-104](#) [20849-130](#) [ATSAMR21B18-MZ210PA](#) [X2E-Z1R-E1-W](#) [X2E-Z1R-W1-W](#)
[XBP24BZ7WITB003J](#) [CC-WMX-MB47-VM](#) [XBP24-ASI-080](#) [X2E-Z1R-E1-A](#) [ATZB-S1-256-3-0-C](#) [AX-SF10-MINI21-868-B1](#) [ATZB-RF-212B-0-CNR](#) [EM357-MOD-ANT-C](#) [AX-SF10-ANT21-868-B1](#) [14575176](#) [XBP24BZ7WITB003](#) [XM-C91-4P-U](#) [ZICM35XSPX-PF-1](#) [CC-MX-LB6B-ZM](#) [ATZB-S1-256-3-0-CR](#) [EM357-MOD-RF-C](#) [20849131](#) [20848674](#) [A2530E24CZ1GM](#) [ATZB-RF-233-1-C](#) [ATZB-X0-256-3-0-C](#) [ZXT24-IO-222R2](#) [20-101-0513](#) [XA-Z14-CS3PH-A](#) [XA-Z14-CS4PH-A](#) [XB24-ASI-001](#) [XB24CAPIS-001](#) [XB24CAPIT-001](#) [XB24CARIS-001](#) [XB24CASIT-001](#) [XB24CAUIS-001](#) [XB24CAUIT-001](#) [XB24CAWIT-001](#) [XB24CZ7PIS-004](#) [XB24CZ7PISB003](#) [XB24CZ7PIT-004](#) [XB24CZ7PITB003](#) [XB24CZ7RIS-004](#) [XB24CZ7RISB003](#) [XB24CZ7SIT-004](#) [XB24CZ7SITB003](#) [XB24CZ7UIS-004](#)