



1-WATT 900 MHZ
RF MODEMS



DIGI XBEE® SX RF MODEMS

1-Watt 900 MHz RF modem features best-in-class range and power consumption for mission-critical wireless cable replacement

Digi XBee SX 1-Watt 900 MHz RF modems provide a combination reliability and redundancy for integrators building low-power, mission-critical wireless systems. With interface options including RS232/485 or Digital/Analog I/O, these modems utilize the DigiMesh® wireless networking protocol, with redundant mesh network operation and support for low-power sleeping nodes.

Customers that don't require mesh network architecture can configure the modem to operate in simple point to multipoint mode. With ideal RF line-of-sight range estimated up to 65 miles and strong interference blocking, these modems are ideal for


applications requiring a reliable, redundant wireless cable replacement over longer ranges.

The Digi XBee SX modems can be configured easily via the USB port, using Digi's free XCTU software. They are pre-certified for use in multiple countries and provide secure, reliable delivery of critical data between devices with 256-bit AES encryption.

BENEFITS

- Adjustable output power up to 1-Watt achieves up to 65 mile range with high gain antenna
- Interfaces options include RS-232, RS-485, USB, Analog I/O and Digital I/O
- DigiMesh networking topology for redundancy and reliability
- 256-bit AES encryption for secure data communications
- Rugged metal enclosure and -40° C to +85° C operating temperature for industrial applications
- Fully certified for use in free, unlicensed 900 MHz band

APPLICATION EXAMPLE

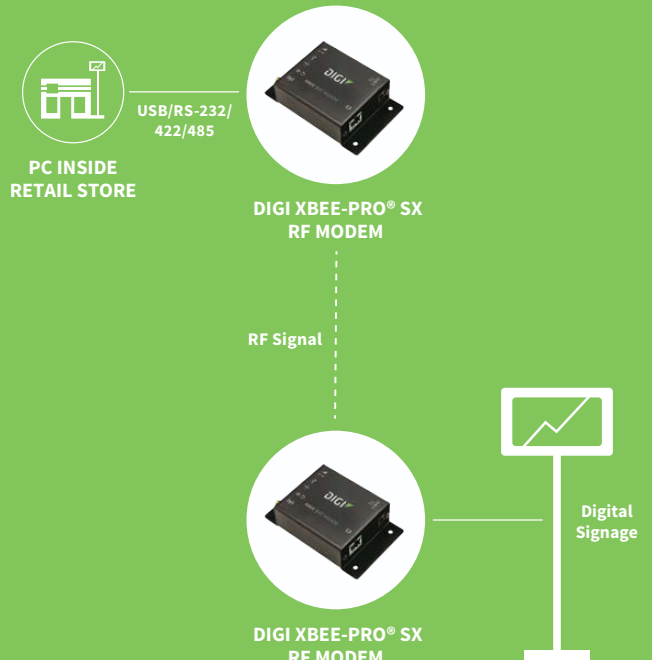

RELATED PRODUCTS



Digi XBee® SX Modules



XTend® PKG



Digi XBee® Gateways



ConnectPort® X2



Digi XLR PRO®

SPECIFICATIONS

Digi XBee® SX Modem

PERFORMANCE

INDOOR/URBAN RANGE	Up to 18 km (11 mi)* at low data rate
OUTDOOR/RF LINE-OF-SIGHT RANGE	Up to 105 km (65 mi)** at low data rate
TRANSMIT POWER	Up to 30 dBm software selectable
RF DATA RATE (SOFTWARE SELECTABLE)	Low data rate: 10 kbps; Middle data rate: 110 kbps; High data rate: 250 kbps
RECEIVER SENSITIVITY	Low data rate: -113 dBm; Middle data rate: -106 dBm; High data rate: -103 dBm
RECEIVER IF SELECTIVITY	Low data rate: 40 dB @ 250 kHz; 50 db @ 500 kHz Middle data rate: 30 dB @ 250 kHz; 40 db @ 500 kHz High data rate: 30 dB @ 500 kHz; 45 db @ 1000 kHz
RECEIVER RF SELECTIVITY	Below 900 MHz and above 930 MHz: >50 dB

NETWORK AND SECURITY

FREQUENCY RANGE	ISM 902 MHz to 928 MHz
SPREAD SPECTRUM	Frequency hopping
SUPPORTED NETWORK TOPOLOGIES	Mesh, Point-to-point, Point-to-multipoint, Peer-to-peer
MODULATION	Gaussian Frequency Shift Keying (GFSK)
ENCRYPTION	Optional 254-bit Advanced Encryption Standard (AES) cipher block chaining (CBC) Encryption

ANTENNA

CONNECTOR	RPSMA
ANTENNA IMPEDANCE	50 Ω unbalanced
INPUT LEVEL AT ANTENNA PORT	Maximum 6 dBm

POWER REQUIREMENTS

SUPPLY VOLTAGE RANGE	7-30 VDC
TYPICAL SUPPLY VOLTAGE	12 V
RECEIVE CURRENT	20 mA (@12V)
TRANSMIT CURRENT	300 mA (@12V)
SLEEP CURRENT	5 mA (@12V)

PHYSICAL PROPERTIES

SIZE	4.5 in x 2.75 in x 1.125 in (11.4 cm x 7 cm x 2.9 cm)
WEIGHT	5 oz (142 g)
DATA CONNECTION	Female RJ-45 (RS232/485), 10-pin screw terminal (4 digital, 4 analog, GND, 12 VDC output), USB mini-B (configuration port)
OPERATING TEMPERATURE	-40° C to +85° C (Industrial)

REGULATORY APPROVALS

FCC (U.S.A)	MCQ-XBPSX
IC (CANADA)	1846A-XBPSX
C-TICK (AUSTRALIA)	RCM
ROHS	Compliant

* We estimate rural ranges based on a 14.5 km (9 mi) range test with dipole antennas.

**Range estimated assuming that the urban noise floor is approximately 15 dB higher than rural. The actual range depends on the setup and level of interference in your location.

SPECIFICATIONS

Digi XBee® SX Modem

ANALOG INPUTS

ABSOLUTE VOLTAGE RATING	Maximum: 11 V; Minimum: -.05 V (each pin)
OPERATING INPUT RANGE	Single-ended voltage mode: 0 - 10 VDC Current loop mode: 4 - 20 mA Differential voltage mode: ± 4 VCD
INPUT IMPEDANCE	Single-ended voltage mode: 13300 Ω Current loop mode: 120 Ω Differential voltage mode: ~1 MΩ
RESOLUTION	10 bits
ACCURACY	.5% at 25° C

DIGITAL INPUTS

INPUT TYPE	Non-inverting Schmitt trigger gate
POSITIVE-GOING SWITCHING THRESHOLD	2.5 V
NEGATIVE-GOING SWITCHING THRESHOLD	1 V
ABSOLUTE VOLTAGE RATING	Maximum: 31 V; Minimum: -.05 V (each pin)
INPUT IMPEDANCE	~1 MΩ

DIGITAL OUTPUTS

OUTPUT TYPE	Open collector sinking driver
MAXIMUM SINK CURRENT	200 mA
MAXIMUM SUPPLY VOLTAGE	31 V (for external pull-up resistor)
RESISTOR PULL-UPS	10 kΩ pulled up to 3.3 VDC

PART NUMBERS

DESCRIPTION

XM-X9-3P-U	XBee SX Modem, RS232/485, North America
XM-X9-5P-U	XBee SX Modem, AIO/DIO, North America

FOR MORE INFORMATION
PLEASE VISIT WWW.DIGI.COM

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2017 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91003522
A2/117

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL FRANCE
+33-1-55-61-98-98 / www.digi.fr

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Modems](#) category:

Click to view products by [Digi International](#) manufacturer:

Other Similar products are found below :

[MT5600SMI-P92](#) [MTQ-L4G1-B02](#) [PL360G55CF-EK](#) [PL360G55CB-EK](#) [ZETA-N-LTE\(EU\)](#) [C-PCM-24S24G-4AV-1](#) [1002-CMF4-OUS](#)
[ASB-1003-CM11-GLB](#) [IX20-0AN4](#) [IX20-W0N4](#) [IX20-WAN4](#) [M113#NFB](#) [E214G#00](#) [E214G#01](#) [M1003GXT00B](#) [MTSMC-L4E1.R1-SP](#)
[MTSMC-L4E1-U.R1-SP](#) [MTSMC-L4N1.R1A-SP](#) [MTSMC-L4N1-U.R1A-SP](#) [DN-24GU](#) [ZN-241G](#) [NOVA-U201](#) [1003824](#) [2313067](#)
[2313656](#) [2313669](#) [2700640](#) [ZETA-N2-GPRS](#) [ASB-1002-CM16-GLB](#) [ASB-1002-CME4-GLB](#) [XM-M92-UP-AA](#) [XM-P91-2P-AA](#) [XM-P91-](#)
[2P-U](#) [XM-P91-UP-AA](#) [XTP9B-PKC-UA](#) [M100G003S](#) [M111F00FS](#) [M113F00FS](#) [M113F002S](#) [M114F002S](#) [MT5692SMI-P-34.R1](#) [MTC-](#)
[G3-B06](#) [MTCM-LNA3-B03-KIT](#) [MTCM-LAT3-B03-KIT](#) [MTD-EV3-N3](#)