

ALR-1400

Interface controller for cost-effective, high reliability monitor applications

Key Features :

- > DVI, VGA Inouts
- > Low Power Consumption
- > VGA to WXGA Resolutions
- > Small Form Factor

The ALR-1400 is a small footprint, highly integrated interface controller with both DVI and Analog RGB inputs. Capable of supporting 4:3 format panels up to SXGA and 16:9 format panels up to WXGA, the ALR -1400 also provides built-in LVDS and dual or single pixel TTL interfaces to address today's current LCD panels.

Panel Connectivity

1366 x 768	1280 x 768	800 x 600
1280 x 1024	1024 x 768	800 x 480
1280 x 800	1024 x 600	640 x 480

Input

Analog RGB :	60Hz at SXGA, WXGA, XGA, SVGA, VGA
	With auto detect of Digital Separate Sync, Sync-On-Green & Composite Sync. Auto detects VGA ~ SXGA interlaced & noninterlaced.
DVI-D	60Hz at SXGA, WXGA, XGA, SVGA, VGA

Reliability

Calculated Mean Time Between Failures
In excess of 200,000 hours. Warranty - 3 years.

Custom Engineering Options


Custom input timing, panel timing, splash screen, OSD Menu, conformal coatings, layouts etc.

Features

Colors :	Up to 8-bit per color, 16.7 million colors.
Functions :	On Screen Display (OSD) menu.
Function Controls :	External buttons, Serial Port Control.
Image Scaling :	Up scaling to fit input to panel resolution.
Image Control :	Brightness, Contrast, Saturation, Hue, Frequency, Phase, Color temperature, Image position, Hue, Gamma.
Other Features :	Auto picture setup, Auto RGB calibration, Auto source seek, OSD timeout, OSD position, Input source select, OSD menu lock, Direct key for brightness level adjustment.
Dimensions :	107mm x 92mm (4.2" x 3.6")
Form Factor :	DV Standard & Mounting Holes
Power Requirements :	12V / 24VDC ±5%, 4W (controller only)
Panel Power :	Supports 3.3V, 5V, 12V & 18V panels.
Panel Signal :	TTL & LVDS
Inverter Support :	DPMS Enable pin (5v or 12v/24v).
Plug & Play :	DDC 1,2/b compatible
Status Indicator :	Dual color LED support.

ALR-1400

Interface controller for cost-effective, high reliability monitor applications

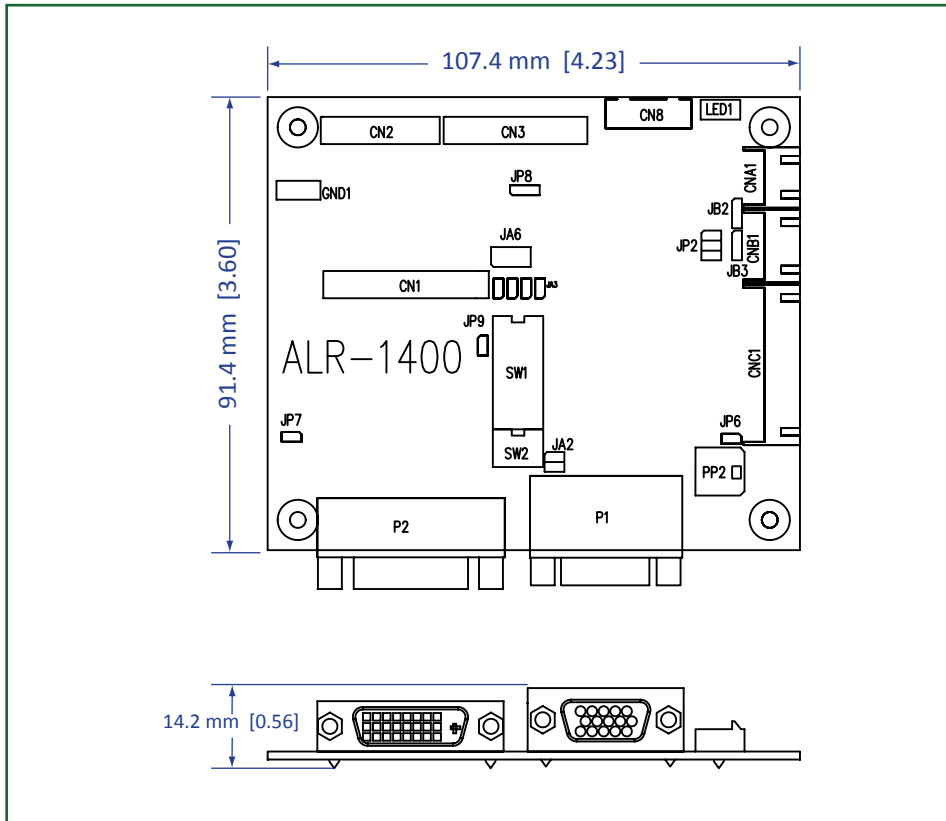

Connector Definitions

CN1	LVDS Panel Signal
CN2	TTL Panel Signal
CN3	TTL Panel Signal
CN8	Serial control
CNA1	Auxiliary Power Output
CNB1	Backlight Inverter
CNC1	OSD Function Controls
LED1	Dual color LED connector
P1	ARGB analog input
P2	DVI-D input
PP2	Main Input Power**

Mechanical Dimensions

Dimensions:
 107.4mm x 91.4mm (4.23" x 3.60")

Form Factor:
 DV standard & mounting holes

Ordering Options

ALR-1400	P/N : 4171000xx-3
OSD Digital Button Board	Kit 60110-3
OSD Vertical Membrane	Kit 60121-3
OSD Horizontal Membrane	Kit 60125-3
Inverter Interface Board	P/N 416040010-3

Available Resources

- 3D Drawings inc JPEG previews
- Instruction Manual
- Revision control documentation**
- Mechanical Drawings
- Firmware Upgrade Manual
- MTBF Analysis**

* See accessories page on website for details.

** Available upon request.

EUROPE

6 Marylebone Passage, London, W1W 8EX, UK
 t : +44 (0) 20-7631-2150

ASIA

16th Floor Millennium City 3, 370 Kwun Tong Road, Kwun Tong, Hong Kong
 t : (852) 2861-3615

USA

18440 Technology Drive, Morgan Hill, CA 95037, USA
 t : +1 (408) 782-7773

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Display Modules](#) category:

Click to view products by [Digital View](#) manufacturer:

Other Similar products are found below :

[P6153-PR](#) [TDP0700T800480PCAP](#) [P6171DPR-DC-RS](#) [P6171DPR-DC-U](#) [MIKROMEDIA 4 FOR STM32F4 CAPACITIVE FPI](#)
[MIKROMEDIA 3 FOR STM32F4 CAPACITIVE FPI](#) [TN0216ANVNANN-GN00](#) [TN0104ANVAANN-GN00](#) [TN0181ANVNANN-GN00](#)
[MIKROMEDIA 5 FOR TIVA CAPACITIVE](#) [MIKROMEDIA 4 FOR TIVA CAPACITIVE](#) [MIKROMEDIA 4 FOR PIC32MZ CAPACITIVE](#)
[RVT43ULFNWC03 V4](#) [SM-RVT101HVBNWCA0](#) [SM-RVT35HHBFWCA0](#) [SM-RVT35HHBNWCA0](#) [SM-RVT43HLBFWCA0](#) [SM-](#)
[RVT43HLBNWCA0](#) [SM-RVT50HQBFWCA0](#) [SM-RVT50HQBNWCA0](#) [SM-RVT70HSBFWCA0](#) [SM-RVT70HSBNWCA0](#) [11769](#)
[MIKROMEDIA FOR DSPIC33](#) [MIKROMEDIA FOR PIC24](#) [MIKROMEDIA FOR PIC32](#) [MIKROMEDIA FOR STELLARIS M3](#)
[MIKROMEDIA HMI 3.5 RES](#) [MIKROMEDIA HMI 5](#) [MIKROMEDIA PLUS FOR FT90X](#) [MIKROMEDIA PLUS FOR PIC32MX7 SHIELD](#)
[MIKROMEDIA PROTO SHIELD](#) [MIKROMEDIA 5 FOR TIVA](#) [MIKROMEDIA 5 FOR TIVA SHIELD](#) [MIKROMEDIA 7 FOR STM32F4](#)
[MIKROMEDIA CONNECT SHIELD](#) [MIKROMEDIA FOR ARM](#) [MIKROMEDIA FOR PSOC5LP](#) [MIKROMEDIA GAMING SHIELD](#)
[MIKROMEDIA HMI 4.3 UXB](#) [MIKROMEDIA HMI 5 RES](#) [MIKROMEDIA HMI 5 UXB](#) [MIKROMEDIA HMI 7](#) [MIKROMEDIA HMI](#)
[BREAKOUT BOARD](#) [RVT50UQTNWC05](#) [RVT70AQFNWC00](#) [18207](#) [PIS-0260](#) [GEN4-ULCD-50D-PI](#) [GEN4-ULCD-70D](#)