


Item List	P/N	Connector Description	Jumper/Switch	Setting
Controller: ACG-1024	4167202-00	CN2 Panel connector,Hirose DF11-28DP-2DSA	JA1 On board +5V logic supply enable (factory set)	1-3, 2-4 closed
Panel connection kit: Panel cable, 330mm	4263112-00	CN3 Panel connector,Hirose DF11-32DP-2DSA	JA2 On board +3.3V Logic supply enable	1-3, 2-4 closed
		CN4 Panel connector,Hirose DF11-20DP-2DSA	JA3 Panel power voltage select	3-5 & 4-6 closed
		CN8 Serial Control input connector,JST B6B-XH-A	JA5 +12V Panel power select	open
		CNA1 Auxiliary power connector, JST B4B-XH-A	JA6 Input power control	open
Inverter kit: Inverter: INV15-208	5560202-00	CNB1 Backlight inverter connector, JST B5B-XH-A	JB2 Backlight inverter On/Off control - signal level	2-3 closed
	Inverter cable,300mm	4260518-01	JB3 Backlight inverter On/Off control - polarity level	1-2 closed
OSD kit: OSD switch mount (VR type)	4106805-50	CNC1 OSD control connector, JST B12B-XH-A	JP15 Panel selection	1-2 & 3-4 closed
	OSD cable, 150mm	4206802-60		
Others	VGA cable 1.8m	4200003-11		
	Switch power supply, 12V 4A	5000007-00		
			P1 VGA in, DB 15 way DDC version	
		PP1 Main power in, 2.5mm DC jack		

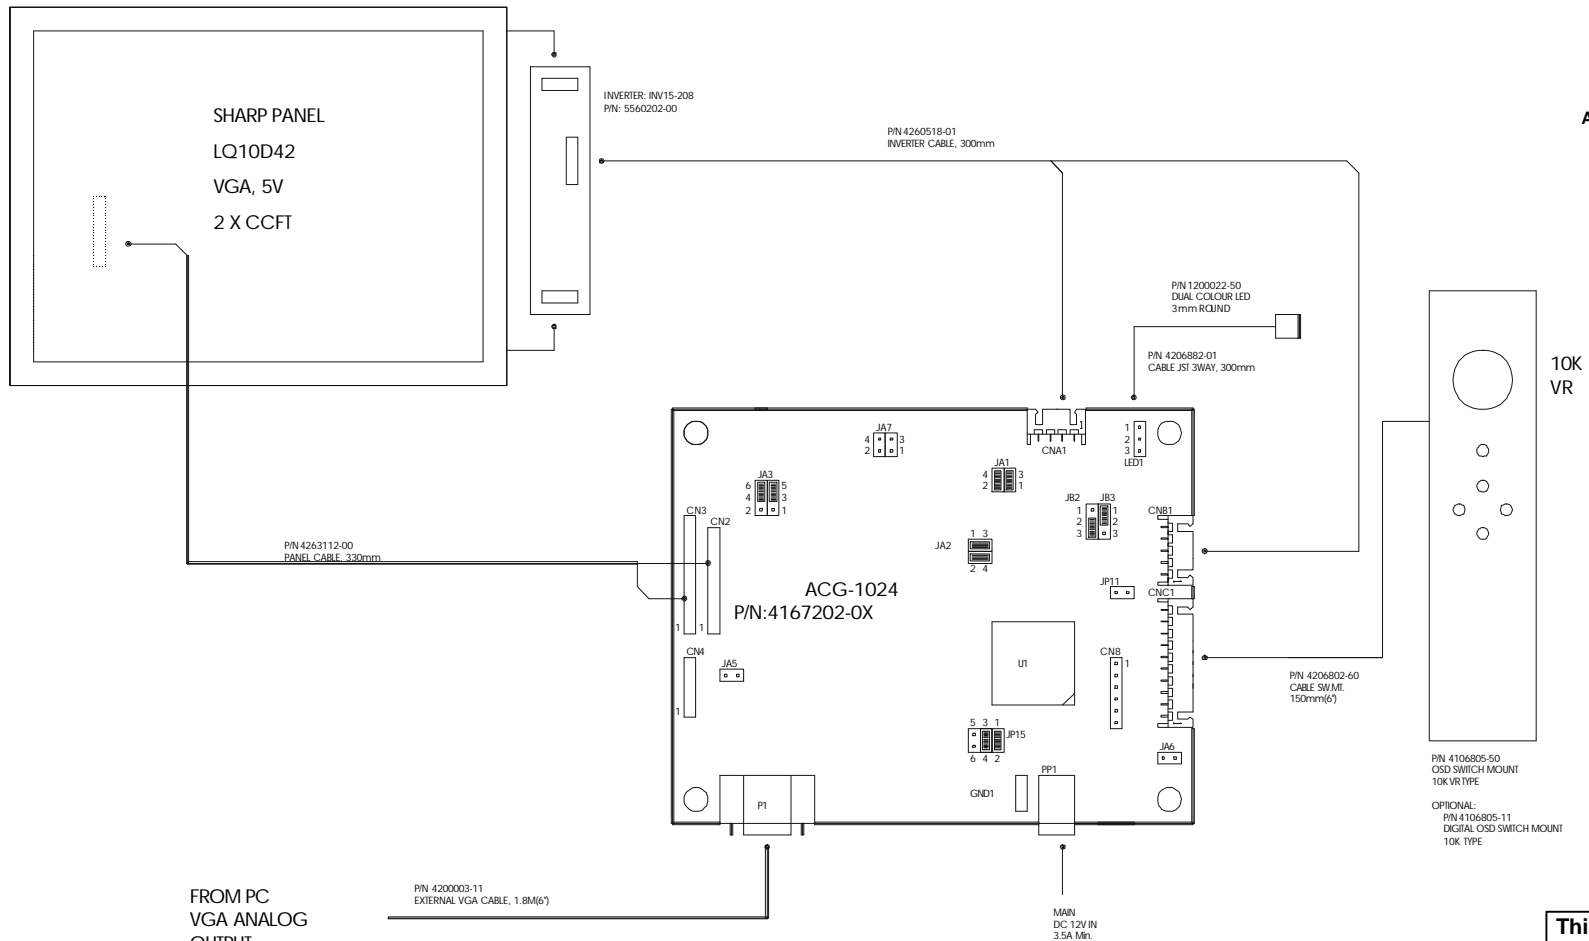

**READ DOCUMENTS FOR
PROPER JB2 & JB3 SETTINGS
AND PROPER INVERTER CABLE
IF USING OTHER INVERTER**

PIN 4106805-50
OSD SWITCH MOUNT
10K VR TYPE
OPTIONAL:
PIN 4106805-11
DIGITAL OSD SWITCH MOUNT
10K TYPE

**This Connection diagram is also
applicable to controller
p/n:4167202-0X,
where X=0**



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [HDMI Cables](#) category:

Click to view products by [Digital View](#) manufacturer:

Other Similar products are found below :

[426301400-3](#) [68767-0003](#) [CA-MINIDP-HDMIF-10FT](#) [HP-19AFMM-SL7A01](#) [HP-19AFMM-SL7A05](#) [S-HDI-DVI-2](#) [S-HDI-DVI-5](#) [10HM-15128-01](#) [HD0003](#) [31888](#) [31893](#) [31897](#) [31907](#) [31908](#) [31911](#) [31913](#) [31914](#) [31915](#) [31919](#) [31920](#) [31921](#) [31923](#) [31925](#) [31926](#) [31929](#) [31930](#)
[31932](#) [31935](#) [31936](#) [31937](#) [31938](#) [CV0038](#) [CV0055](#) [CV0057](#) [CV0057B](#) [CV0058](#) [CV0058B](#) [CV0059B](#) [50580](#) [50581](#) [50582](#) [51579](#)
[51586](#) [51724](#) [51957](#) [52859](#) [31890](#) [31891](#) [31892](#) [31894](#)