



8 button membrane SW to OSD Control Board CN2 Pin Assignment	
pin #	description
10	Common Ground
9	Select Up
8	Select Down
7	Adjust Up/Increase/Right
6	Adjust Down/Decrease/Left
5	Menu
4	Brightness Down
3	Brightness Up
2	ON/OFF
1	Common Ground

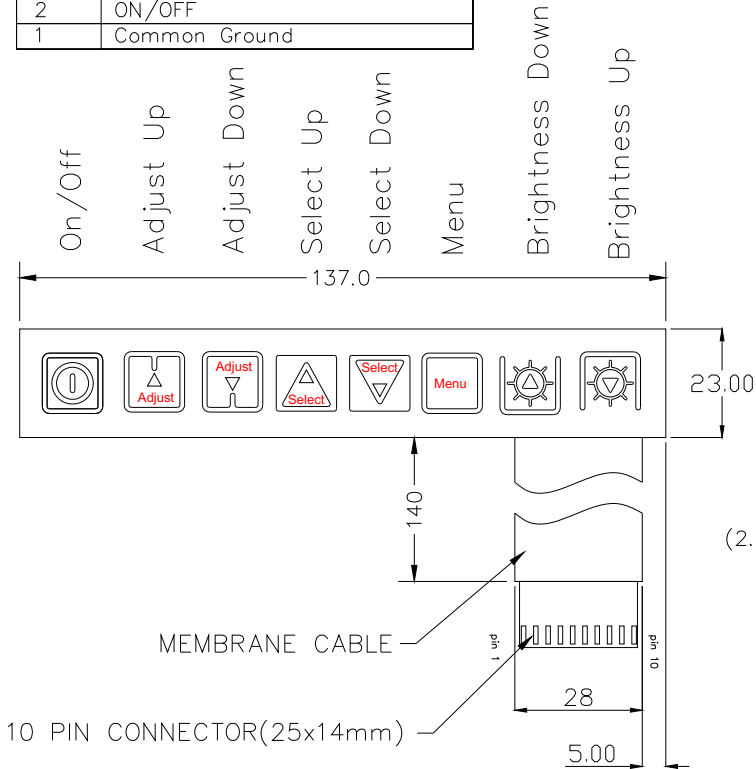

FRONT VIEW

Membrane Switch:
P/N:356301022-3

Membrane interface board
P/N 416100120-3 can operate
under 12VDC/24VDC power input
environment.

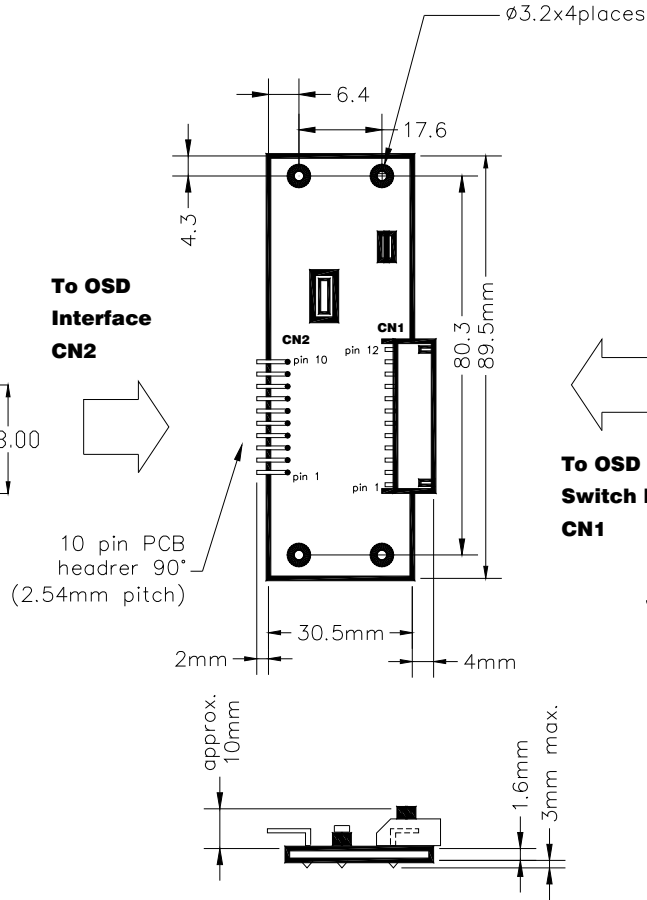

Membrane Interface Board:
P/N:416100120-3

PCB OSD Control Board CN1 Pin Assignment	
pin #	description
12	no connection
11	OSD Select UP
10	OSD Select Down
9	OSD Plus/Right
8	OSD Minus/Left
7	OSD Menu
6	Ground
5	Backlight Brightness VR pin B
4	Backlight Brightness VR pin WP
3	Backlight Brightness VR pin A
2	Power Switch B
1	Power Switch A

Jumper setting on OSD interface
DEFAULT POWER

JP1 : 1-2 closed - OFF
2-3 closed - ON

BRIGHTNESS INC/DEC SWITCH
JP2 : 1-3 & 2-4 closed - SWAP
1-2 & 3-4 closed - NORMAL

OSD cable:
P/N:426120410-3 (12/12 WAY), 610mm



Title:
KIT 60145-3 OSD KIT

NOTE:
All dimensions are in mm

Date:
30 JAN 08

Kit 60145-3 OSD KIT

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Display Development Tools](#) category:

Click to view products by [Digital View](#) manufacturer:

Other Similar products are found below :

[KIT 60121-3](#) [S5U13U11P00C100](#) [KIT 60145-3](#) [S5U13748P00C100](#) [DFR0413](#) [KIT95000-3](#) [LCD-16396](#) [PIM370](#) [1109](#) [MIKROE-2449](#)
[MIKROE-2453](#) [131](#) [DEV-13628](#) [1590](#) [MIKROE-2269](#) [1601](#) [1770](#) [1947](#) [1983](#) [1987](#) [2050](#) [2218](#) [2260](#) [2345](#) [2418](#) [2423](#) [2454](#) [2455](#) [2478](#)
[2674](#) [FIT0477](#) [333](#) [334](#) [TE-M321-SDK](#) [DFR0428](#) [cs-epapersk-03](#) [338](#) [DEV-14442](#) [FIT0478](#) [cs-paperino-01](#) [OM-E-OLE](#)
[ALTHSMCMIPILCD](#) [ASD2421-R](#) [TDP0500T800480PCAP](#) [LCD-14048](#) [cs-epapersk-02](#) [2719](#) [LCD-01](#) [PIM113](#) [3498](#)