

PART OBSOLETE - USE [MMBTA06-7-F](#)**FMMTA06****SOT23 NPN SILICON PLANAR MEDIUM POWER TRANSISTORS****SUMMARY** $V_{(BR)CEO} > 80V$ $I_C(\text{cont}) = 500\text{mA}$ **DESCRIPTION**

80V medium power NPN transistor in a compact SOT23 package

FEATURES

- 80V V_{CEO}
- Compact SOT23 package
- $H_{FE} 50 @ I_C = 100\text{mA}$

APPLICATIONS


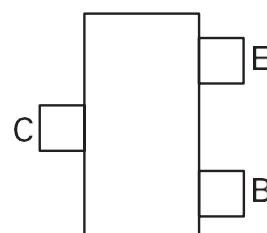
- Low power motor driving circuits

ORDERING INFORMATION

DEVICE	REEL SIZE	TAPE WIDTH	QUANTITY PER REEL
FMMTA06TA	7 "	8mm	3,000

DEVICE MARKING

- 1G

SYMBOL**PINOUT****TOP VIEW**

FMMTA06**ABSOLUTE MAXIMUM RATINGS**

PARAMETER	SYMBOL	LIMIT	UNIT
Collector-base voltage	V_{CBO}	80	V
Collector-emitter voltage	V_{CEO}	80	V
Emitter-base voltage	V_{EBO}	4	V
Peak pulse current	I_{CM}	1	A
Continuous collector current	I_C	500	mA
Base current	I_B	100	mA
Power dissipation @ $T_A = 25^\circ C$	P_D	330	mW
Linear derating factor		2.64	$mW/\text{ }^\circ C$
Operating and storage temperature	$T_{j,T_{stg}}$	-55 to + 150	$^\circ C$

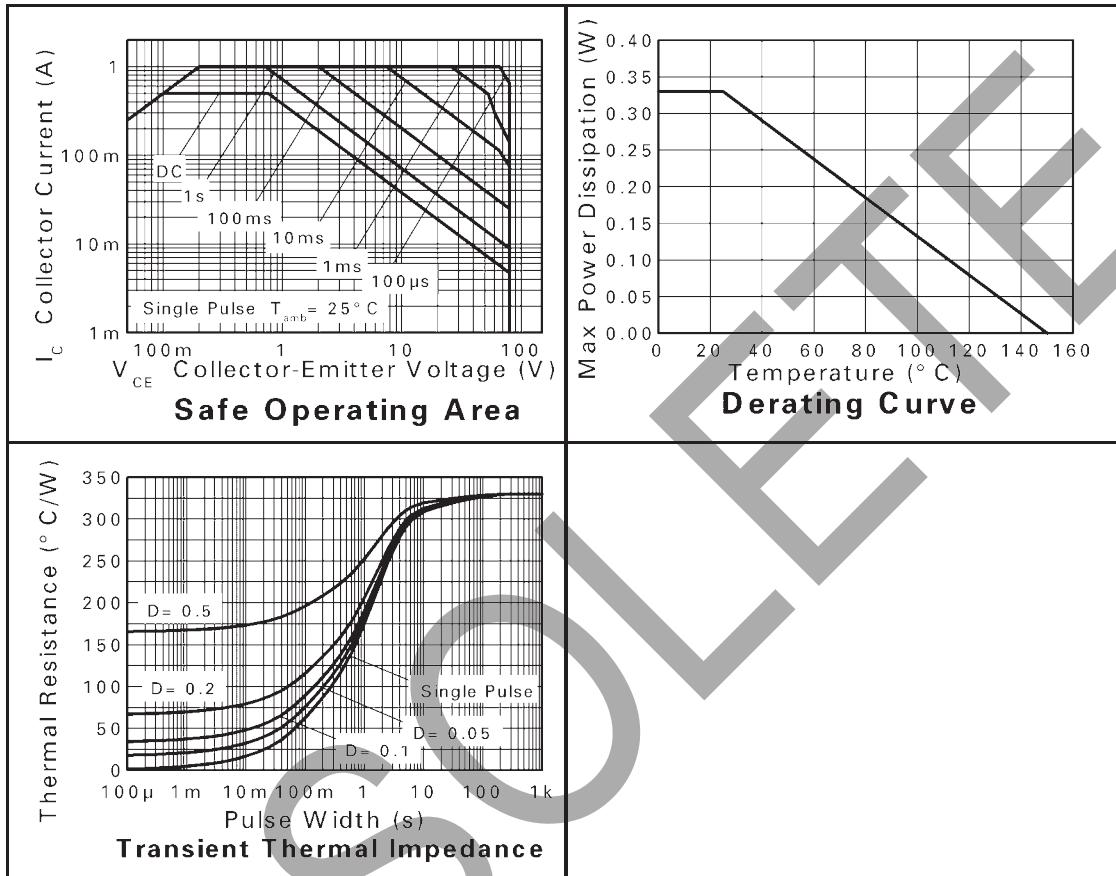
THERMAL RESISTANCE

PARAMETER	SYMBOL	VALUE	UNIT
Junction to ambient	R_{0JA}	379	$^\circ C/W$

OBSOLETE

FMMTA06

CHARACTERISTICS



FMMTA06**ELECTRICAL CHARACTERISTICS(at $T_{amb} = 25^\circ C$ unless otherwise stated)**

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS
Collector-base breakdown voltage	$V_{(BR)CBO}$	80			V	$I_C = 1 \text{ mA}$
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	80			V	$I_C = 10 \text{ mA}^*$
Emitter-base breakdown voltage	$V_{(BR)EBO}$	4			V	$I_E = 100 \text{ A}$
Collector-emitter cut-off current	I_{CES}			100	nA	$V_{CES} = 60V$
Collector-base cut-off current	I_{CBO}			100	nA	$V_{CB} = 80V$
Static forward current transfer ratio	H_{FE}	50 50	120			$I_C = 10 \text{ mA}, V_{CE} = 1V^*$ $I_C = 100 \text{ mA}, V_{CE} = 1V^*$
Collector-emitter saturation voltage	$V_{CE(sat)}$			0.25	V	$I_C = 100 \text{ mA}, I_B = 10 \text{ mA}^*$
Base-emitter turn-on voltage	$V_{BE(on)}$			1.2	V	$I_C = 0.1 \text{ A}, V_{CE} = 1V^*$
Transition frequency	f_T	100				$I_C = 10 \text{ mA}, V_{CE} = 2V,$ $f = 100 \text{ MHz}$

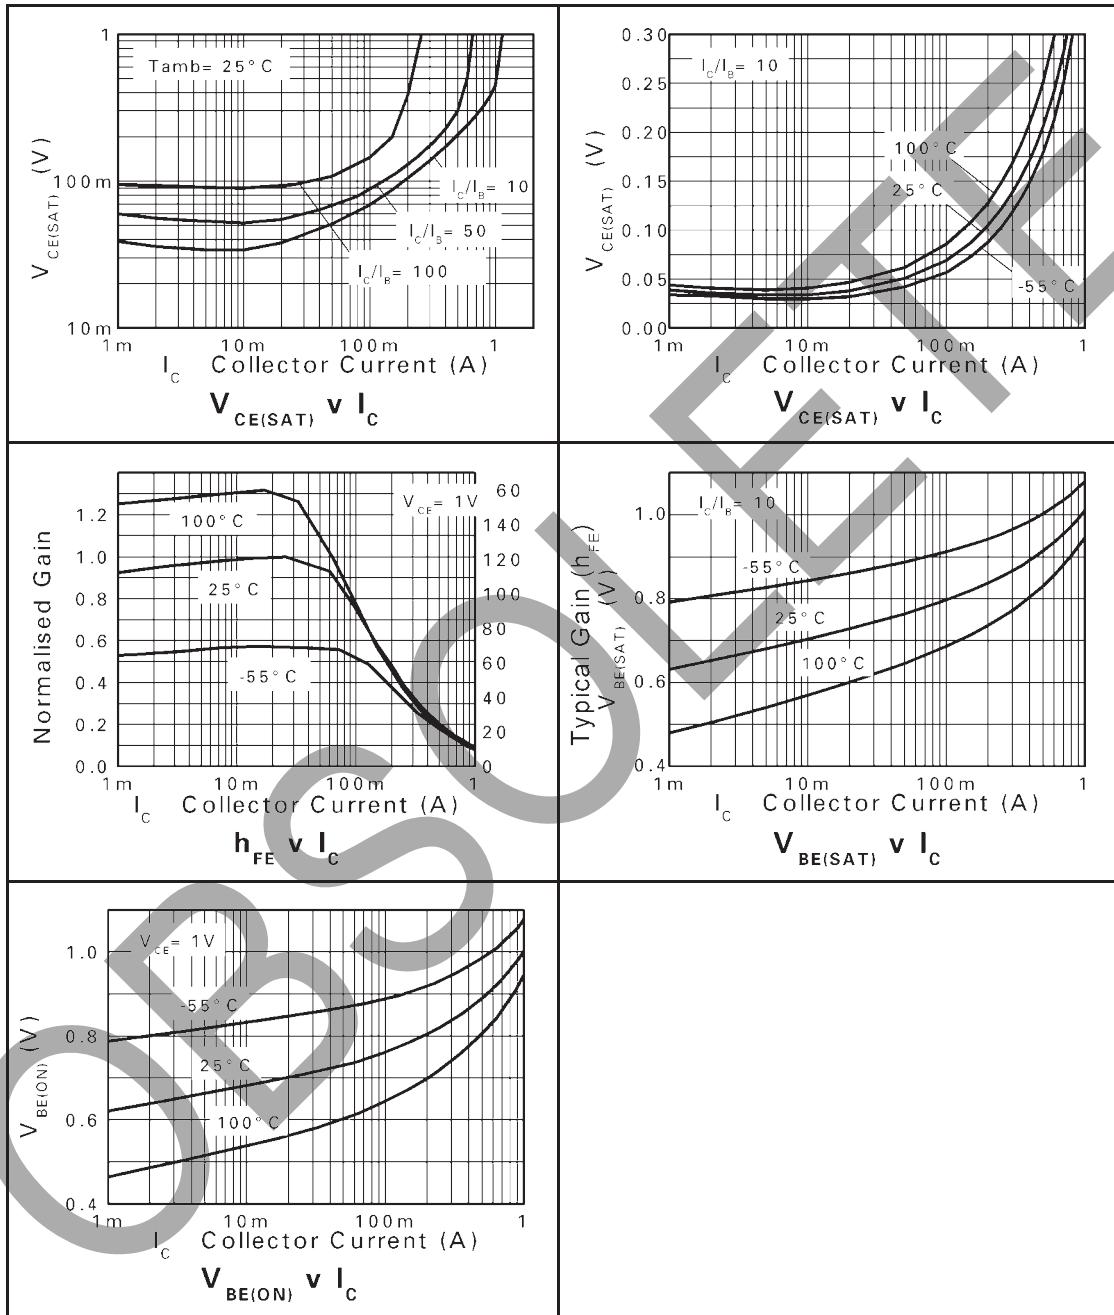
NOTES

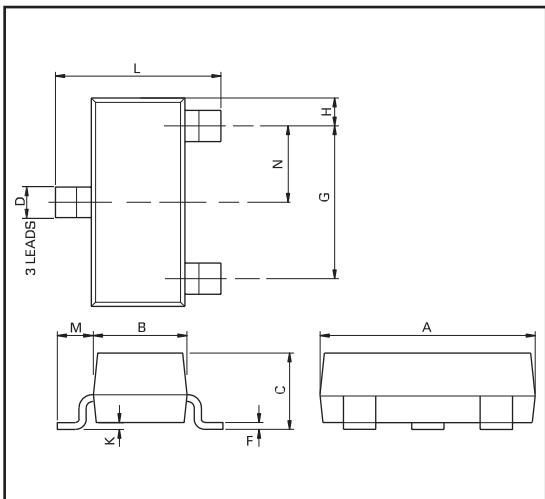
* Measured under pulsed conditions. Pulse width= 300 S. Duty cycle <2%

OBSOLETE

FMMTA06

TYPICAL CHARACTERISTICS



FMMTA06**PACKAGE OUTLINE**

Controlling dimensions are in millimeters. Approximate conversions are given in inches

PACKAGE DIMENSIONS

DIM	Millimeters		Inches		DIM	Millimeters		Inches	
	Min	Max	Min	Max		Min	Max	Max	Max
A	2.67	3.05	0.105	0.120	H	0.33	0.51	0.013	0.020
B	1.20	1.40	0.047	0.055	K	0.01	0.10	0.0004	0.004
C		1.10		0.043	L	2.10	2.50	0.083	0.0985
D	0.37	0.53	0.015	0.021	M	0.45	0.64	0.018	0.025
F	0.085	0.15	0.0034	0.0059	N	0.95 NOM		0.0375	NOM
G	1.90 NOM		0.075 NOM						

©Zetex Semiconductors plc 2004

Europe	Americas	Asia Pacific	Corporate Headquarters
Zetex GmbH Streifeldstraße 19 D-81673 München Germany Telefon: (49) 89 45 49 49 0 Fax: (49) 89 45 49 49 49 europe.sales@zetex.com	Zetex Inc 700 Veterans Memorial Hwy Hauppauge, NY 11788 USA Telephone: (1) 631 360 2222 Fax: (1) 631 360 8222 usa.sales@zetex.com	Zetex (Asia) Ltd 3701-04 Metroplaza Tower 1 Hing Fong Road, Kwai Fong Hong Kong Telephone: (852) 26100 611 Fax: (852) 24250 494 asia.sales@zetex.com	Zetex Semiconductors plc Zetex Technology Park, Chadderton Oldham, OL9 9LL United Kingdom Telephone (44) 161 622 4444 Fax: (44) 161 622 4446 hq@zetex.com

These offices are supported by agents and distributors in major countries world-wide.

This publication is issued to provide outline information only which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose or form part of any order or contract or be regarded as a representation relating to the products or services concerned. The Company reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service.

For the latest product information, log on to www.zetex.com

ISSUE 3 - JUNE 2021

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Bipolar Transistors - BJT category:

Click to view products by Diodes Incorporated manufacturer:

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [BC546/116](#) [BC557/116](#) [BSW67A](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE63](#) [C4460](#) [2SA1419T-TD-H](#)
[2SA1721-O\(TE85L,F\)](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#) [2SD2150T100R](#) [SP000011176](#) [2N2369ADCSM](#) [2SC2412KT146S](#)
[2SC5490A-TL-H](#) [2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [US6T6TR](#) [732314D](#) [CMXT3906 TR](#)
[CPH3121-TL-E](#) [CPH6021-TL-H](#) [873787E](#) [UMX21NTR](#) [EMT2T2R](#) [MCH6102-TL-E](#) [FP204-TL-E](#) [NJL0302DG](#) [2N3583](#) [2SA1434-TB-E](#)
[2SC3143-4-TB-E](#) [2SD1621S-TD-E](#) [30A02MH-TL-E](#) [NSV40301MZ4T1G](#) [NTE13](#) [NTE15](#) [NTE16001](#) [NTE16006](#) [NTE26](#) [NTE320](#)
[NTE323](#)