

**SOT223 NPN SILICON PLANAR
HIGH VOLTAGE TRANSISTOR**


FZTA42

ISSUE 3 – SEPTEMBER 2007 ©

FEATURES

- * Suitable for video output stages in TV sets and switch mode power supplies
- * High breakdown voltage

COMPLIMENTARY TYPE – FZTA92
PARTMARKING DETAIL – DEVICE TYPE IN FULL



ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	VALUE	UNIT
Collector-Base Voltage	V_{CBO}	300	V
Collector-Emitter Voltage	V_{CEO}	300	V
Emitter-Base Voltage	V_{EBO}	5	V
Base Current	I_B	100	mA
Continuous Collector Current	I_C	500	mA
Power Dissipation at $T_{amb}=25^\circ\text{C}$	P_{tot}	2	W
Operating and Storage Temperature Range	$T_j:T_{stg}$	-55 to +150	°C


ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^\circ\text{C}$).

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS.
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	300			V	$I_C=100\mu\text{A}, I_E=0$
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	300			V	$I_C=1\text{mA}, I_B=0^*$
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	5			V	$I_E=100\mu\text{A}, I_C=0$
Collector Cut-Off Current	I_{CBO}			0.1	μA	$V_{CB}=200\text{V}, I_E=0$
Emitter Cut-Off Current	I_{EBO}			0.1	μA	$V_{EB}=5\text{V}, I_C=0$
Collector-Emitter Saturation Voltage	$V_{CE(\text{sat})}$			0.5	V	$I_C=20\text{mA}, I_B=2\text{mA}$
Base-Emitter Saturation Voltage	$V_{BE(\text{sat})}$			0.9	V	$I_C=20\text{mA}, I_B=2\text{mA}$
Static Forward Current Transfer Ratio	h_{FE}	25 40 40				$I_C=1\text{mA}, V_{CE}=10\text{V}^*$ $I_C=10\text{mA}, V_{CE}=10\text{V}^*$ $I_C=30\text{mA}, V_{CE}=10\text{V}^*$
Transition Frequency	f_T	50			MHz	$I_C=10\text{mA}, V_{CE}=20\text{V}$ $f=20\text{MHz}$
Output Capacitance	C_{obo}			6	pF	$V_{CB}=20\text{V}, f=1\text{MHz}$

* Measured under pulsed conditions. Pulse width=300μs. Duty cycle ≤ 2%
For typical characteristics graphs see FMMTA42 datasheet.

FZTA42

TYPICAL CHARACTERISTICS

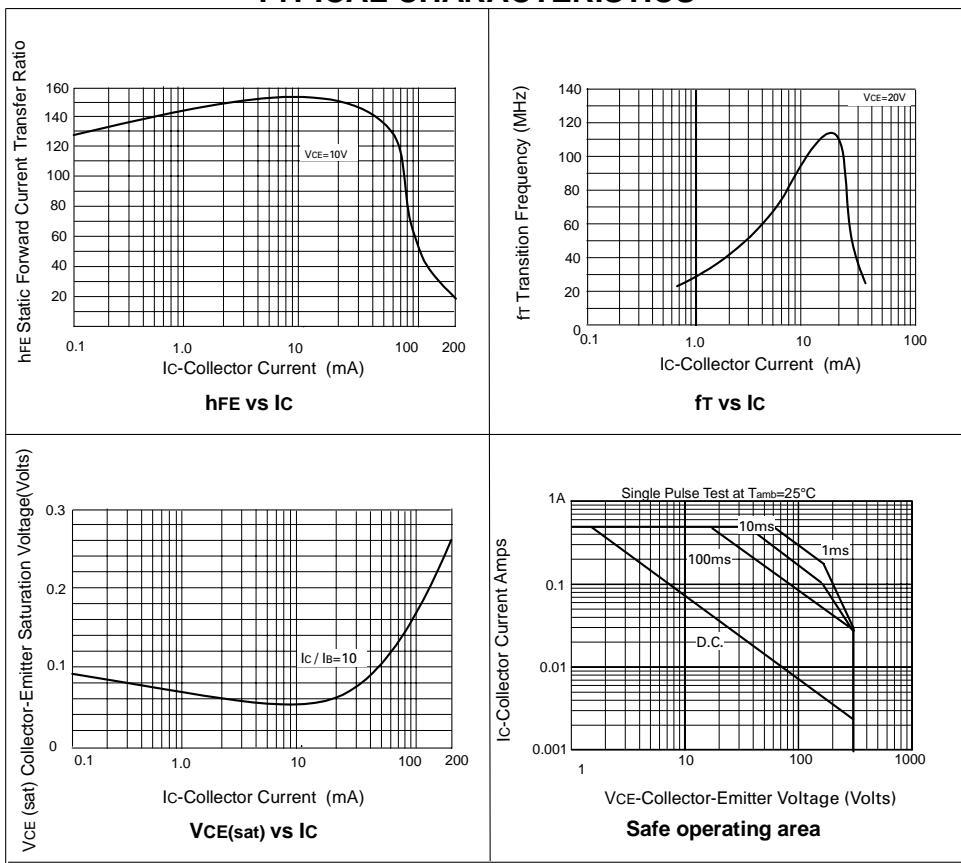

NPN SILICON PLANAR HIGH VOLTAGE TRANSISTOR

ISSUE 2 – MARCH 94


FEATURES

- * High voltage

APPLICATIONS

- * Telephone dialler circuit

MPSA42

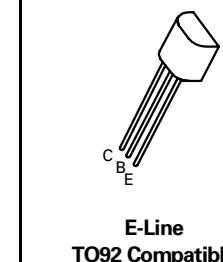

ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	VALUE	UNIT
Collector-Base Voltage	V _{CBO}	300	V
Collector-Emitter Voltage	V _{CEO}	300	V
Emitter-Base Voltage	V _{EBO}	6	V
Continuous Collector Current	I _C	500	mA
Power Dissipation at T _{amb} =25°C	P _{tot}	680	mW
Operating and Storage Temperature Range	T _j ;T _{stg}	-55 to +175	°C

ELECTRICAL CHARACTERISTICS (at T_{amb} = 25°C).

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS.
Collector-Base Breakdown Voltage	V _{(BR)CBO}	300			V	I _C =100μA, I _E =0
Collector-Emitter Breakdown Voltage	V _{(BR)CEO}	300			V	I _C =1mA, I _B =0*
Emitter-Base Breakdown Voltage	V _{(BR)EBO}	6			V	I _E =100μA, I _C =0
Collector Cut-Off Current	I _{CBO}			0.1	μA	V _{CB} =200V, I _E =0
Emitter Cut-Off Current	I _{EBO}			0.1	μA	V _{EB} =6V, I _C =0
Collector-Emitter Saturation Voltage	V _{CE(sat)}			0.5	V	I _C =20mA, I _B =2mA*
Base-Emitter Saturation Voltage	V _{BE(sat)}			0.9	V	I _C =20mA, I _B =2mA*
Static Forward Current Transfer Ratio	h _{FE}	25 40 40				I _C =1mA, V _{CE} =10V* I _C =10mA, V _{CE} =10V* I _C =30mA, V _{CE} =10V*
Transition Frequency	f _T	50			MHz	I _C =10mA, V _{CE} =20V f=20MHz
Output Capacitance	C _{obo}			6	pF	V _{CB} =20V, f=1MHz

*Measured under pulsed conditions. Pulse width=300μs. Duty cycle ≤2%

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Bipolar Transistors - BJT category:

Click to view products by Diodes Incorporated manufacturer:

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [BC546/116](#) [BC557/116](#) [BSW67A](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE63](#) [C4460](#) [2SA1419T-TD-H](#)
[2SA1721-O\(TE85L,F\)](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#) [2SD2150T100R](#) [SP000011176](#) [2N2369ADCSM](#) [2SC2412KT146S](#)
[2SC5490A-TL-H](#) [2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [US6T6TR](#) [732314D](#) [CMXT3906 TR](#)
[CPH3121-TL-E](#) [CPH6021-TL-H](#) [873787E](#) [UMX21NTR](#) [EMT2T2R](#) [MCH6102-TL-E](#) [FP204-TL-E](#) [NJL0302DG](#) [2N3583](#) [2N3879](#)
[2SA1434-TB-E](#) [2SC3143-4-TB-E](#) [2SD1621S-TD-E](#) [30A02MH-TL-E](#) [NSV40301MZ4T1G](#) [NTE13](#) [NTE15](#) [NTE16001](#) [NTE16006](#) [NTE26](#)
[NTE320](#)