

SF21 THRU SF28

2.0 AMP. Super Fast Plastic silicon Rectifiers

DIA. $\frac{0.140(3.6)}{0.104(2.6)}$

DIA. $\frac{0.031 (0.8)}{0.023 (0.6)}$

DO-15

1.0 (25.4) MIN.

1.0 (25.4)

MTN.

Dimensions in inches and (millimeters)


 $\frac{0.300(7.6)}{0.230(5.8)}$

Features

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability

Mechanical Data

- Case: Molded plastic DO-15
- Terminals: Plated leads solderable per MIL-STD-202,Method 208 guaranteed
- Polarity: Color band dentes cathode end
- Mounting Position: Any
- Making: Type Number
- Lead Free: For RoHS/Lead Free Version



Rating at 25°C ambient temperature unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load

For capacitive load derate current by 20%

SYMBOL	SF21	SF22	SF23	SF24	SF25	SF26	SF28	Unit
Vrm	50	100	150	200	300	400	600	V
Vrms	35	70	105	140	210	280	420	V
VDC	50	100	150	200	300	400	600	V
IF(AV)	2.0						А	
Ifsm	50							A
l²t	10.375						A ² s	
Vfm	0.95 1.25 1.7					V		
5.0 IR 100								
								uA
Trr	35						nS	
Cj	40 30					pF		
R _{θJA}	25						°C/W	
Tj	-55 to + 125						°C	
Тѕтс	-55 to + 150						°C	
	VRM VRMS VDC IF(AV) IFSM I ² t VFM IR IR Cj R _{0JA} Tj	VRM 50 VRMS 35 VDC 50 IF(AV) - IFSM - IFSM - IFA - VFM - IR - TRR - Cj - R0JA -	VRM 50 100 VRMS 35 70 VDC 50 100 IF(AV)	VRM 50 100 150 VRMS 35 70 105 VDC 50 100 150 IF(AV) -5 100 150 IFSM -5 -5 100 150 IFSM -5 -5 -5 -5 IR -5 -5 -5 -5	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	$\begin{array}{c c c c c c c c c c } V_{RM} & 50 & 100 & 150 & 200 & 300 \\ \hline V_{RMS} & 35 & 70 & 105 & 140 & 210 \\ \hline V_{DC} & 50 & 100 & 150 & 200 & 300 \\ \hline I_{F(AV)} & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & & & & & & & &$	$\begin{array}{c c c c c c c } V_{RM} & 50 & 100 & 150 & 200 & 300 & 400 \\ \hline V_{RMS} & 35 & 70 & 105 & 140 & 210 & 280 \\ \hline V_{DC} & 50 & 100 & 150 & 200 & 300 & 400 \\ \hline I_{F(AV)} & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & & & & & & & &$	$\begin{array}{c c c c c c c c c c } \hline V_{RM} & 50 & 100 & 150 & 200 & 300 & 400 & 600 \\ \hline V_{RMS} & 35 & 70 & 105 & 140 & 210 & 280 & 420 \\ \hline V_{DC} & 50 & 100 & 150 & 200 & 300 & 400 & 600 \\ \hline I_{F(AV)} & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & & & & & & & \\ \hline I_{FSM} & & & & & & & & & & & & & & & & & & &$

Note: 1. Leads maintained at ambient temperature at a distance of 9.5mm from the case

2.Reverse Recovery Test Conditions: IF=0.5A, IR=1.0A, IRR=0.25A

3. Measured at 1.0 MHz and Applied reverse Voltage of 4.0V D.C



SF21 THRU SF28

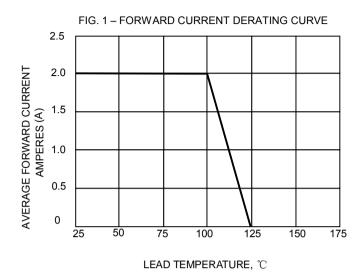


FIG.2-TYPICAL FORWARD CHARACTERISTICS

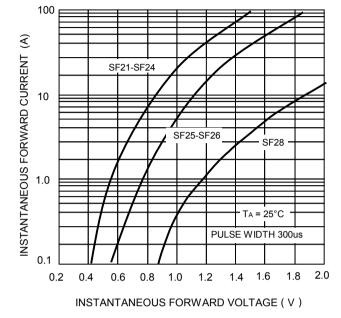


FIG. 3 - MAXIMUM NON-REPETITIVE SURGE CURRENT


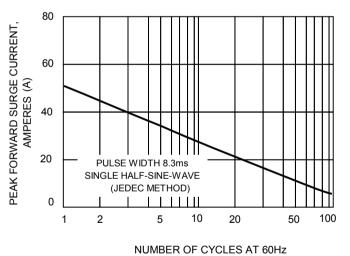


FIG.4 – TYPICAL JUNCTION CAPACITANCE



REVERSE VOLTAGE (V)

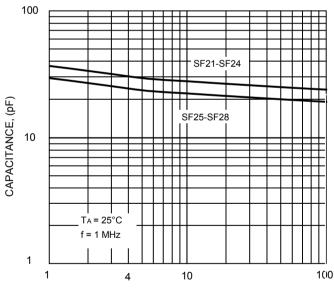

Important Notice and Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from DIYI.
- DIYI reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.
- DIYI disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- DIYI does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the here in document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications.

DIYI makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

- The products shown here in are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own ris k andagree to fully indemnify DIYI for any damages resulting from such improper use or sale.
- Since DIYI uses lot number as the tracking base, please provide the lot number for tracking when complaining.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Rectifiers category:

Click to view products by DIYI manufacturer:

Other Similar products are found below :

D91A DA24F4100L DD89N1600K-A DD89N16K-K RL252-TP DLA11C-TR-E DSA17G 1N4005-TR BAV199-TP UFS120Je3/TR13 JANS1N6640US VS-80-1293 DD89N16K DD89N16K-A 481235F DSP10G-TR-E 067907F MS306 ND104N08K SPA2003-B-D-A01 VS-80-6193 VS-66-9903 VGF0136AB US2JFL-TP UFS105Je3/TR13 A1N5404G-G ACGRA4007-HF ACGRB207-HF RF301B2STL RF501B2STL UES1306 UES1302 BAV199E6433HTMA1 ACGRC307-HF ACEFC304-HF JANTXV1N5660A UES1106 GS2K-LTP D126A45C D251N08B SCHJ22.5K SM100 SCPA2 SCH10000 SDHD5K STTH20P035FP VS-8EWS12S-M3 VS-12FL100S10 ACGRA4001-HF MUR420GP-TP