


Data Sheet

Coloured Flat Cable

FBL XX x 0,23 / 1,10 - 1,40 Pitch2,54

**Klasing P/N
050915xx**

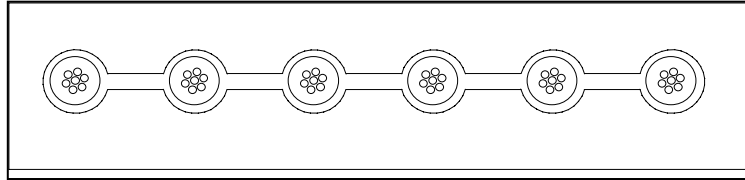

CONSTRUCTION:

Conductor: Stranded copper wire, 7 x 0,203 mm => 0,23 mm², AWG 24
tinned,

1. Insulation: PVC
Colours : optional
Ø : 1,10 ± 0,05 mm
Shorehardness (A) : 90 ± 3

2. Insulation: PVC
Colour : clear
Pitch : 2,54 ± 0,10 mm
Ø : 1,40 ± 0,10 mm
Bridge : 0,35 ± 0,05 mm
Shorehardness (A) : 91 ± 3

Printing: optional

Technical Data:

Test voltage : > 2 kV
at 50 Hz eff. for 1 minute.
Insulation resistance min. : 20 MOhm x km at 20 °C
Conductor resistance max. : 90 Ohm/km at 20 °C
Operating voltage max. : 300 V
Temperature rating:
static : - 20 to + 70 °C
operating : - 10 to + 70 °C
Flame retardent acc to DIN VDE 0482 Part 625-2-1

The information provided in this data-sheet is correct according to the best of our know-ledge. It is provided for information purposes only and is intended to assist with planing. It does not relieve the user of his or her responsibility to check in advance whether the products we supply are suitable for the purpose intended by the user. It is subject to change, should new information render this necessary.

Data Sheet

Coloured Flat Cable

FBL XX x 0,23 / 1,10 - 1,40 Pitch2,54

**Klasing P/N
050915xx**

No. of cond.:	Overall width: (mm)	Total pitch: (mm)	P/N:
2	3,94 ± 0,10	2,54 ± 0,10	05091502
3	6,48 ± 0,15	5,08 ± 0,15	05091503
4	9,02 ± 0,20	7,62 ± 0,20	05091504
5	11,56 ± 0,25	10,16 ± 0,25	05091505
6	14,10 ± 0,25	12,70 ± 0,25	05091506
7	16,64 ± 0,25	15,24 ± 0,25	05091507
8	19,18 ± 0,25	17,78 ± 0,25	05091508
9	21,72 ± 0,25	20,32 ± 0,25	05091509
10	24,26 ± 0,25	22,86 ± 0,25	05091510
11	26,80 ± 0,25	25,40 ± 0,25	05091511
12	29,34 ± 0,25	27,94 ± 0,25	05091512
13	31,88 ± 0,30	30,48 ± 0,30	05091513
14	34,42 ± 0,30	33,02 ± 0,30	05091514
15	36,96 ± 0,30	35,56 ± 0,30	05091515
16	39,50 ± 0,30	38,10 ± 0,30	05091516
17	42,04 ± 0,30	40,64 ± 0,30	05091517
18	44,58 ± 0,30	43,18 ± 0,30	05091518
19	47,12 ± 0,40	45,72 ± 0,40	05091519
20	49,66 ± 0,40	48,26 ± 0,40	05091520
21	52,20 ± 0,40	50,80 ± 0,40	05091521
22	54,74 ± 0,40	53,34 ± 0,40	05091522
23	57,28 ± 0,40	55,88 ± 0,40	05091523
24	59,82 ± 0,40	58,42 ± 0,40	05091524
25	62,36 ± 0,50	60,96 ± 0,50	05091525
26	64,90 ± 0,50	63,50 ± 0,50	05091526
27	67,44 ± 0,50	66,04 ± 0,50	05091527
28	69,98 ± 0,50	68,58 ± 0,50	05091528
29	72,52 ± 0,50	71,12 ± 0,50	05091529
30	75,06 ± 0,50	73,66 ± 0,50	05091530

Other no. of conductors possible!

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [klasing](#) manufacturer:

Other Similar products are found below :

[Klasing](#)