


DTS-40 CURRENT COMPENSATED CHOKES




APPLICATIONS:




- Common-mode noise suppression on an AC power supply line and signal/data line

ORDERING CODE:




DTS -40 /47 /1,9 -V

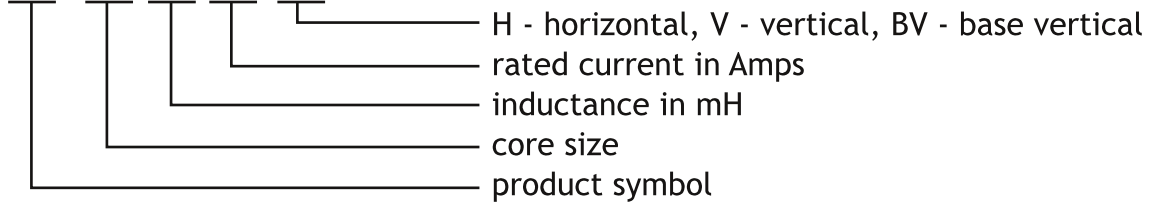

DIMENSIONS:

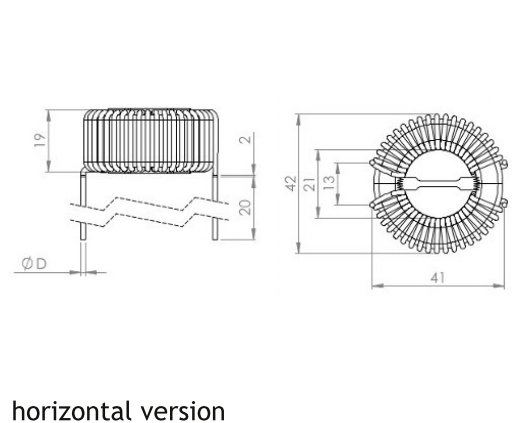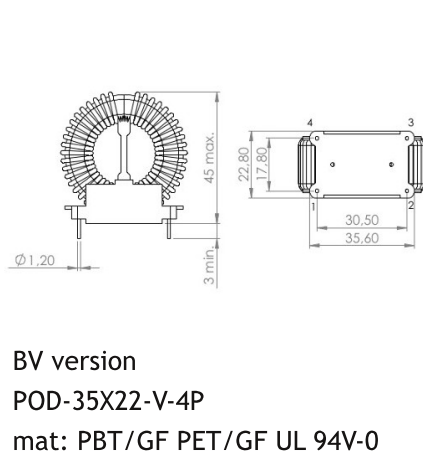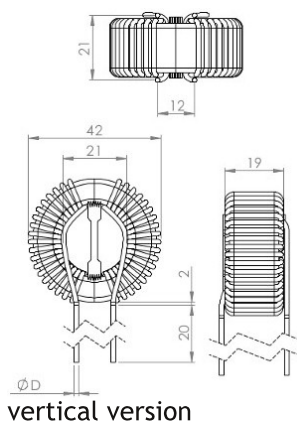

FOOTPRINTS:

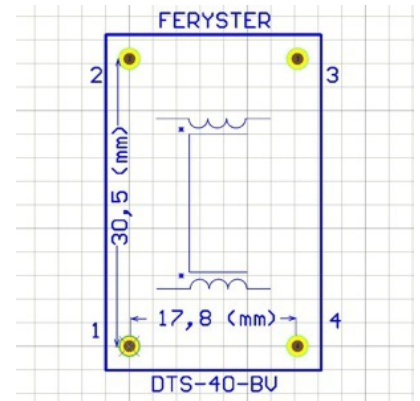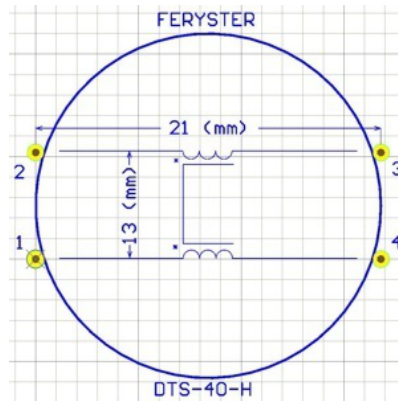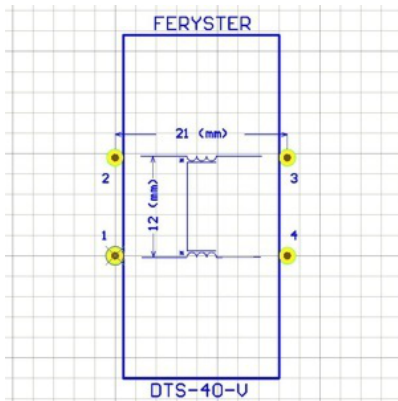


PROPERTIES:

Part number	L_{nom} [mH]	I_{nom} [A]	RDC [Ω]	Mounting version			\varnothing [mm]
				V	H	BV	
DTS-40/0,33/50	2x0,33	50,0	2x0,001	✓	✓	-	4,0
DTS-40/0,47/50	2x0,47	50,0	2x0,001	✓	✓	-	4,0
DTS-40/0,68/44	2x0,68	44,0	2x0,001	✓	✓	-	2,5
DTS-40/1,0/39	2x1,0	39,0	2x0,002	✓	✓	-	2,4
DTS-40/1,5/35	2x1,5	35,0	2x0,003	✓	✓	-	2,3
DTS-40/2,2/30	2x2,2	30,0	2x0,004	✓	✓	-	2,2
DTS-40/3,3/20	2x3,3	20,0	2x0,007	✓	✓	-	1,8
DTS-40/4,7/15	2x4,7	15,0	2x0,011	✓	✓	-	1,6
DTS-40/6,8/10	2x6,8	10,0	2x0,020	✓	✓	-	1,3
DTS-40/10/7,8	2x10	7,8	2x0,030	✓	✓	-	1,2
DTS-40/15/5,0	2x15	5,0	2x0,054	✓	✓	-	0,9
DTS-40/22/4,5	2x22	4,5	2x0,073	✓	✓	✓	0,9
DTS-40/33/2,8	2x33	2,8	2x0,134	✓	✓	✓	0,7
DTS-40/47/1,9	2x47	1,9	2x0,232	✓	✓	✓	0,6



- Inductance tolerance: -20% +50%
- LCR meter $f=10\text{kHz}$
- Dielectric withstanding voltage 2000V
- RDC Cu wire resistance $\pm 20\%$

CHARACTERISTICS:



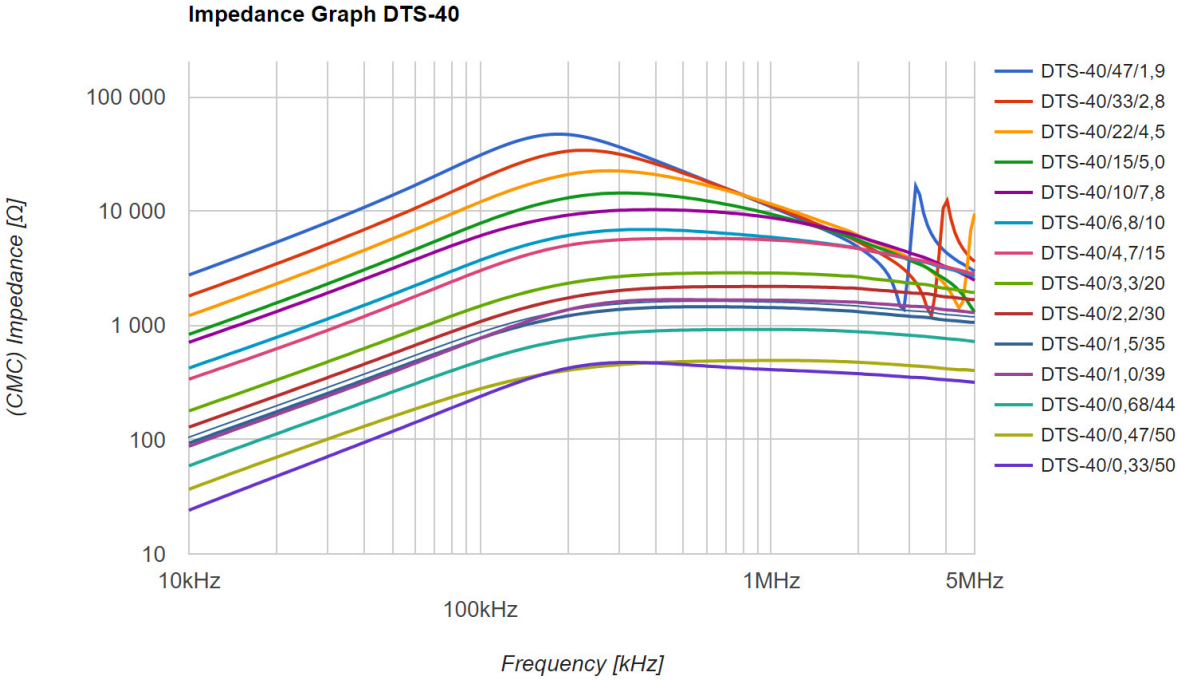





MEASUREMENT METHOD:




- Measured with RIGOL DSA815.


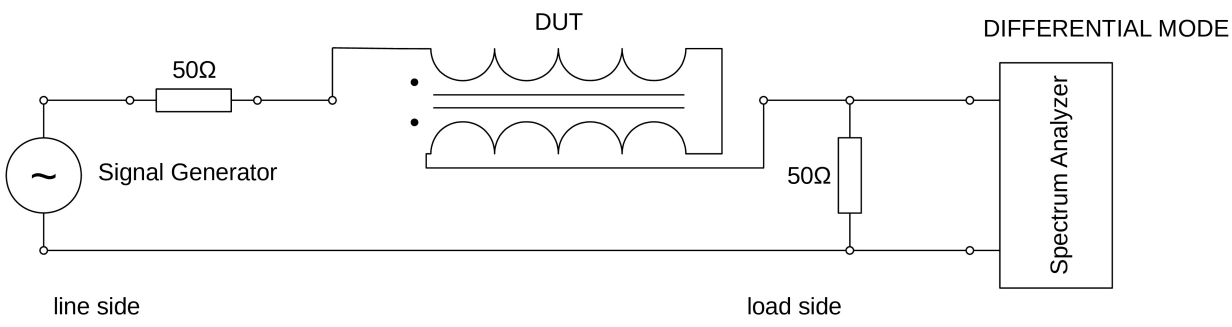
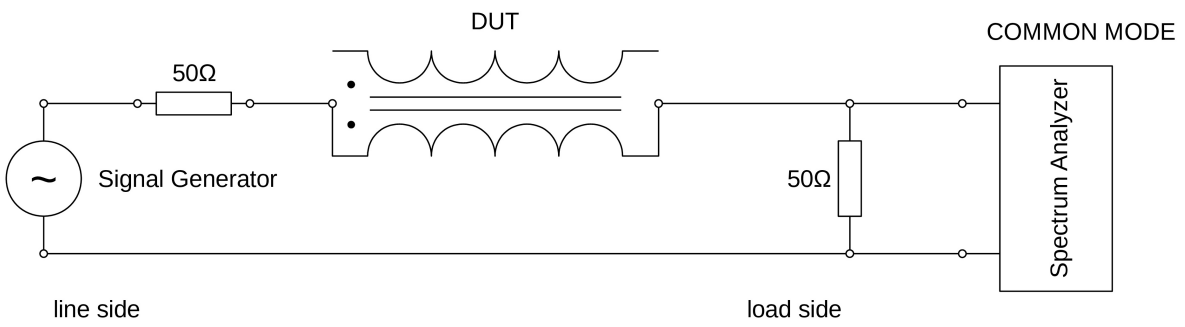




ATTENUATION:

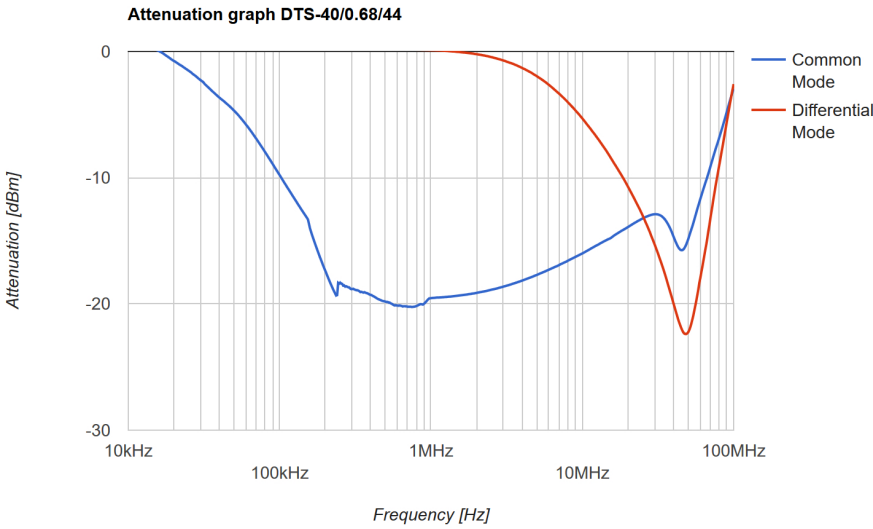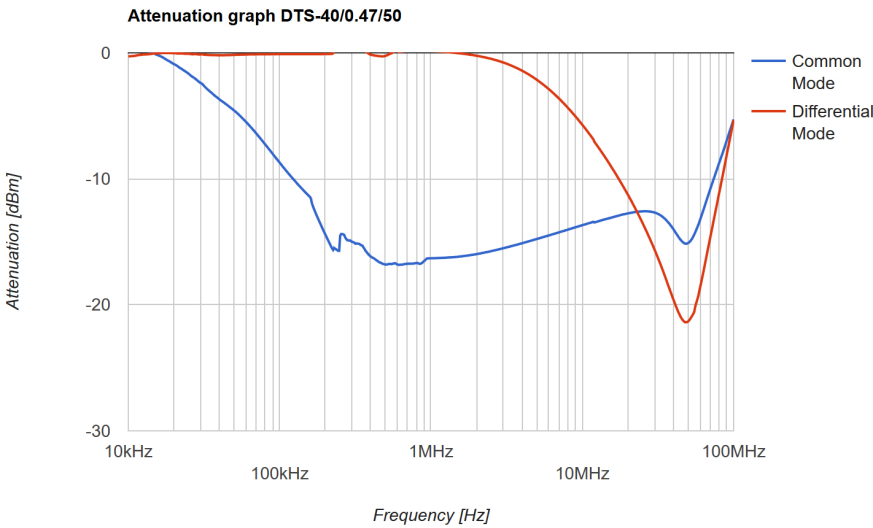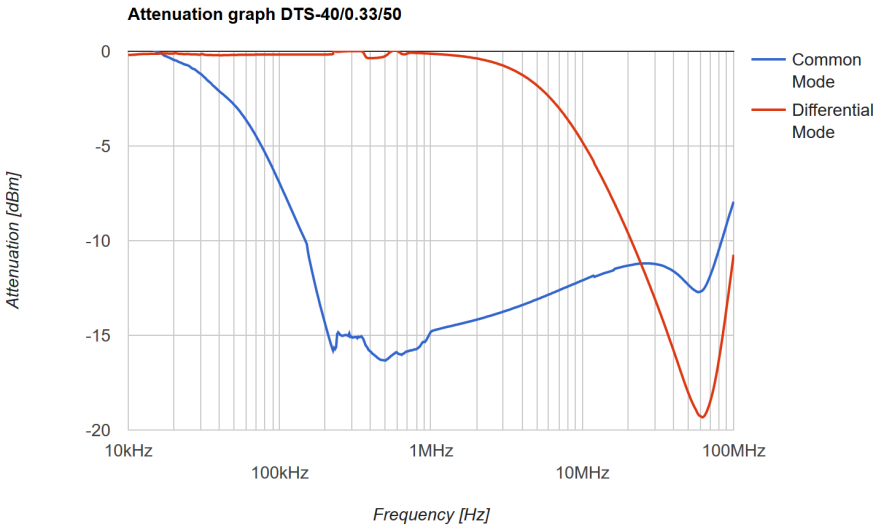

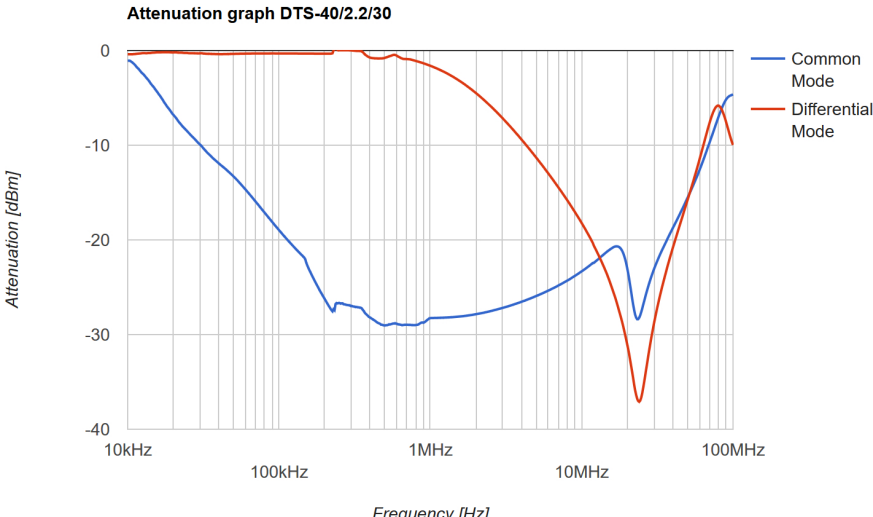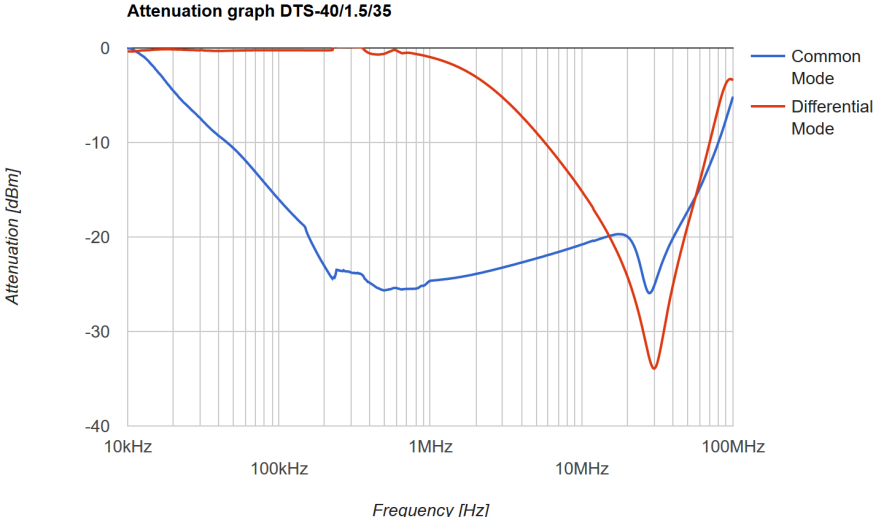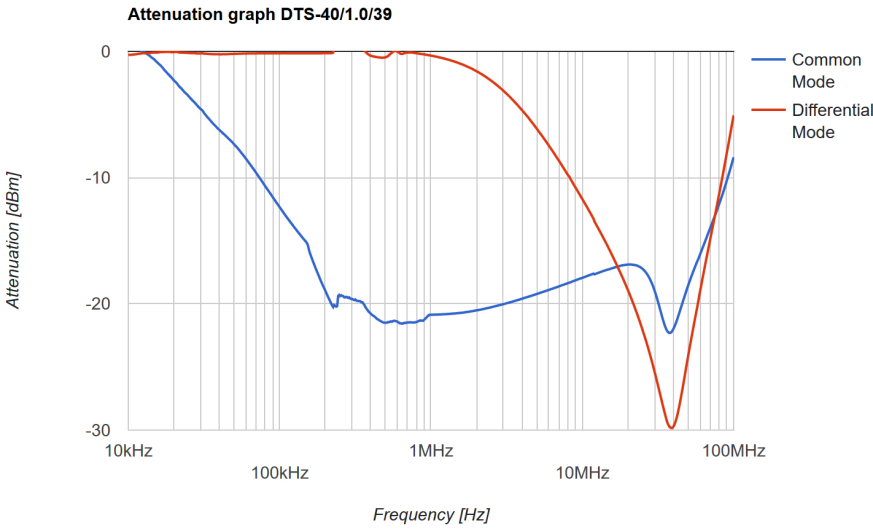


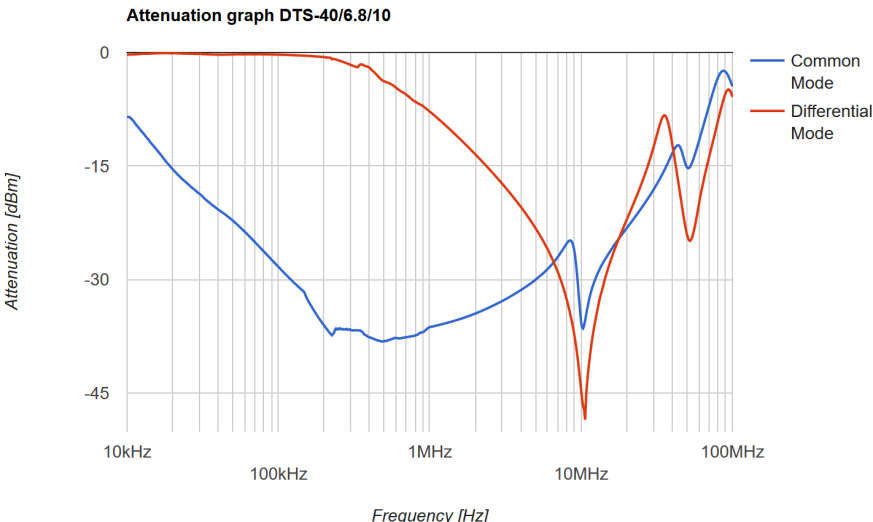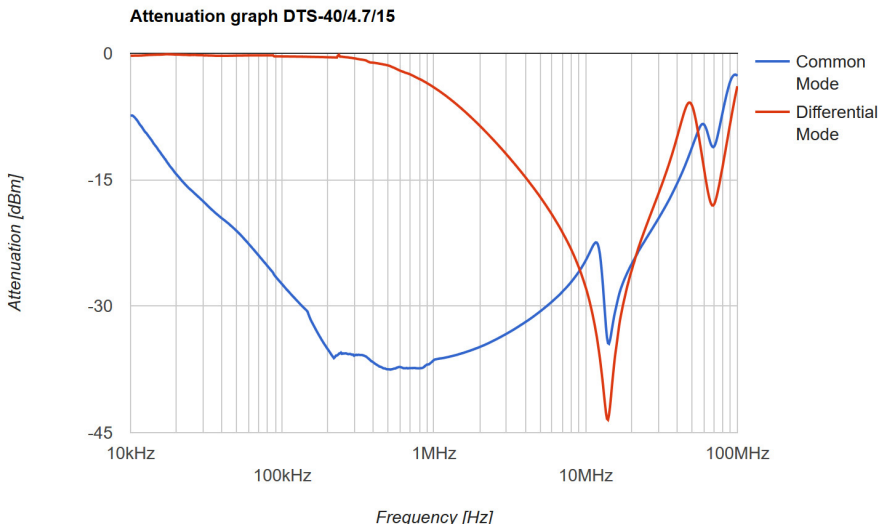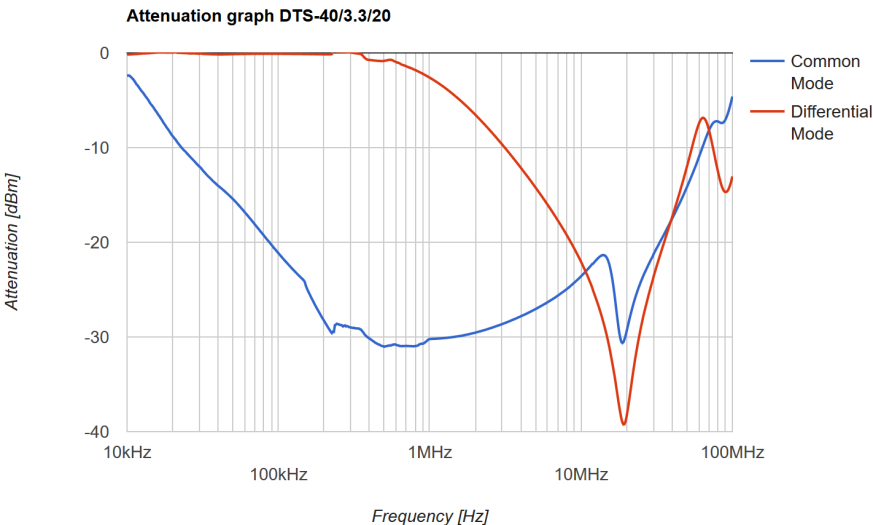

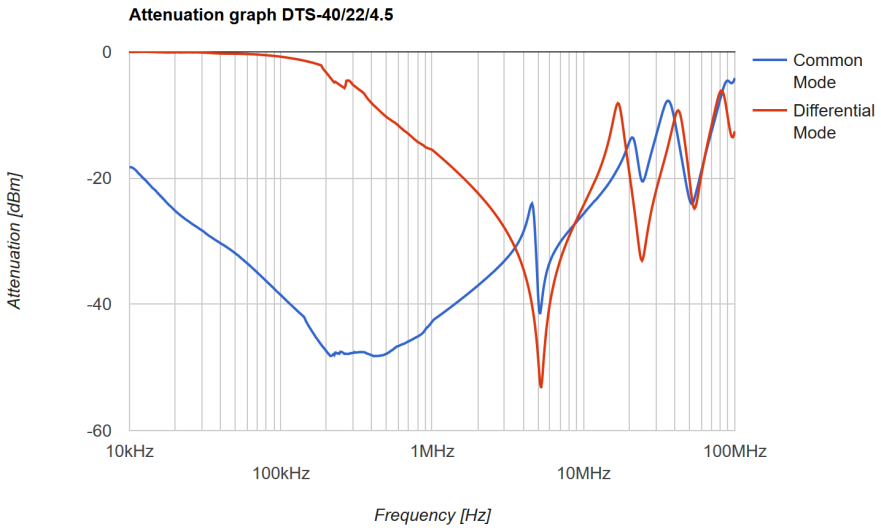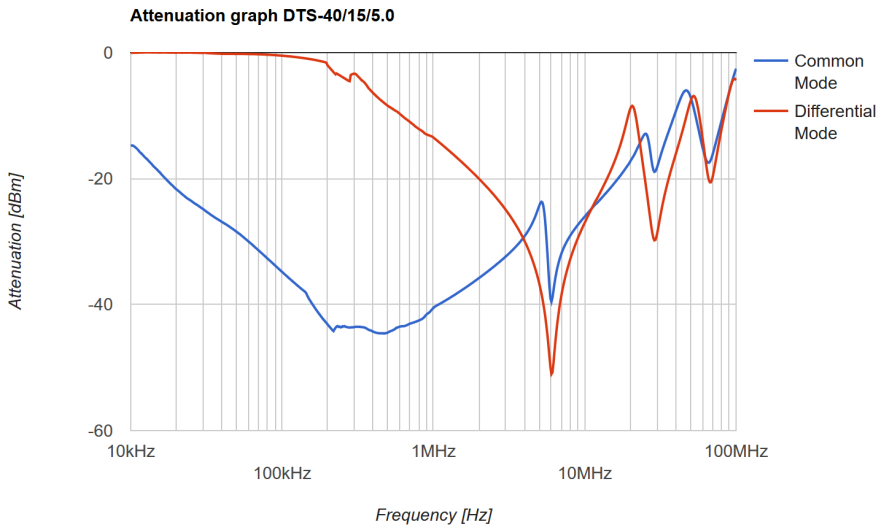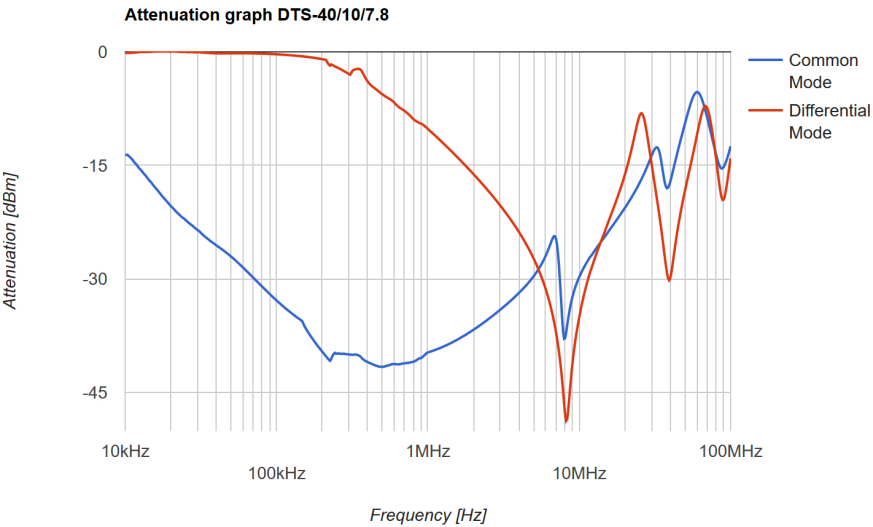


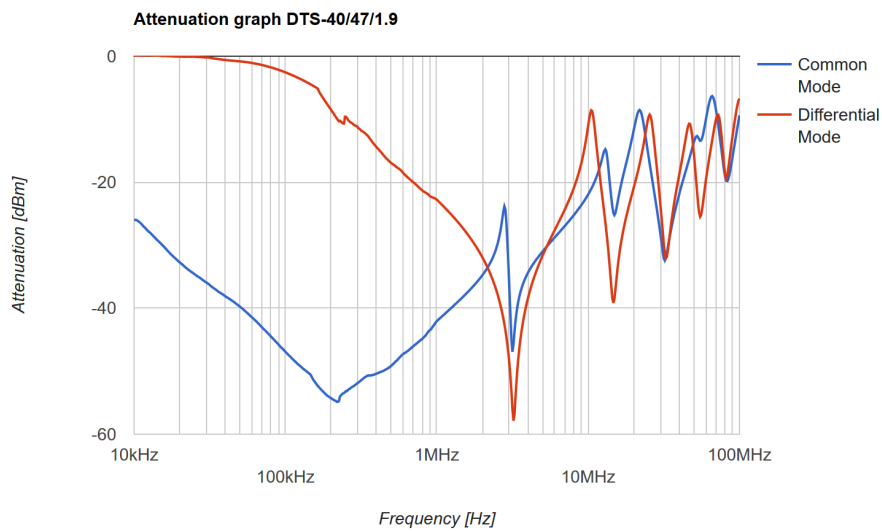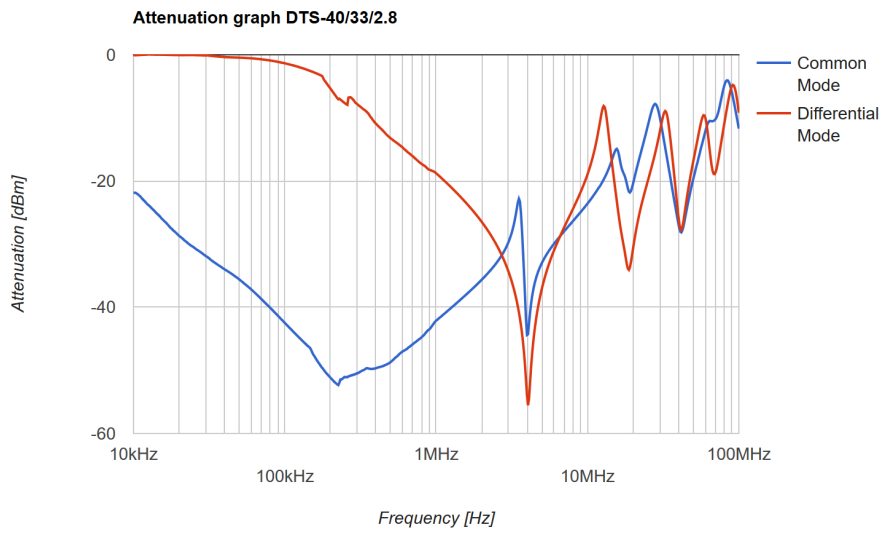

COMMON MODE ATTENUATION:

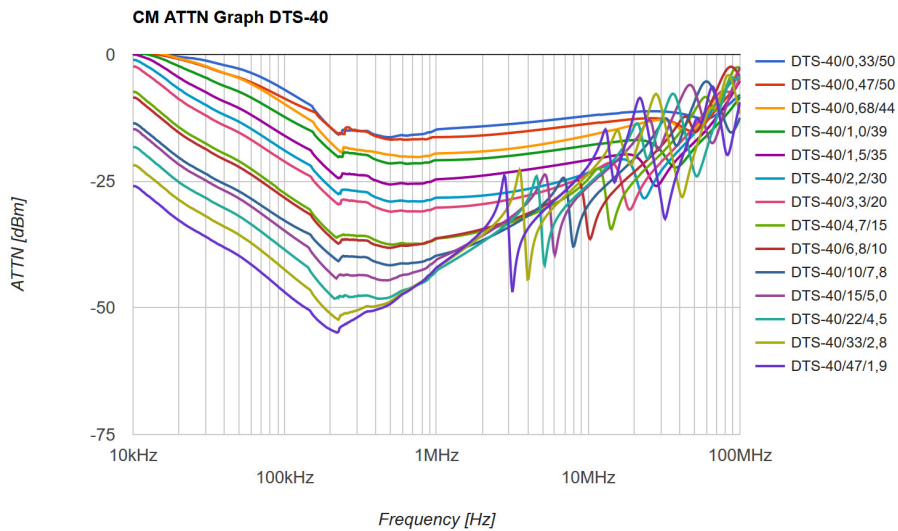

DIFFERENTIAL MODE ATTENUATION:

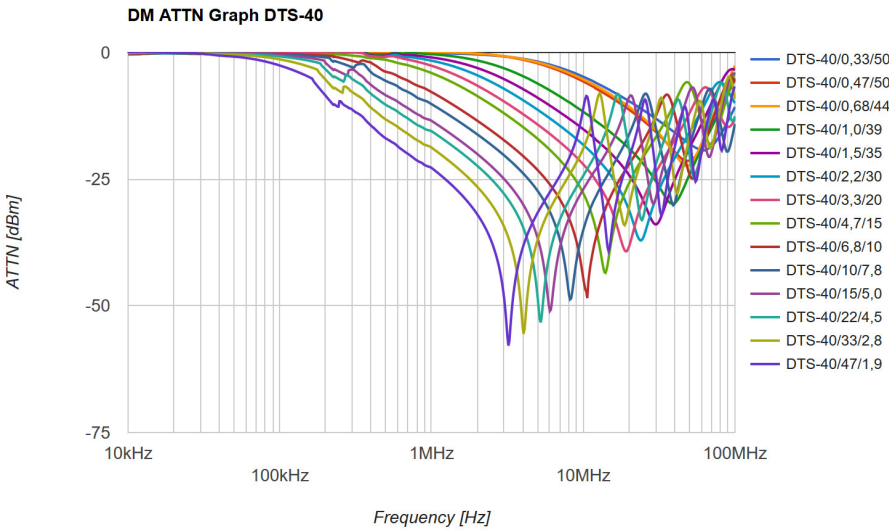

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Feryster](#) manufacturer:

Other Similar products are found below :

[MLZ1608M6R8WTD25](#) [MLZ1608N6R8LT000](#) [MLZ1608N3R3LTD25](#) [MLZ1608N3R3LT000](#) [MLZ1608N150LT000](#)
[MLZ1608M150WTD25](#) [MLZ1608M3R3WTD25](#) [MLZ1608M3R3WT000](#) [MLZ1608M150WT000](#) [MLZ1608A1R5WT000](#)
[MLZ1608N1R5LT000](#) [B82432C1333K000](#) [PCMB053T-1R0MS](#) [PCMB053T-1R5MS](#) [PCMB104T-1R5MS](#) [CR32NP-100KC](#) [CR32NP-151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#)
[CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#)
[MGDQ4-00004-P](#) [MGDU1-00016-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [PM06-2N7](#) [PM06-39NJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC8-1R2-R](#)