

SRA1

solid-state relay - single phase

DURAKOOL



- High load voltage - up to 480VAC
- 4 - 32VDC or 90 - 250VAC control voltage
- Zero cross-over or Random switching
- LED input indicator
- Finger protected terminals
- RoHS Compliant



Output (load)

Load type		SPST-NO (1 N/O) Resistive
Load current		10A, 20A, 25A, 30A, 40A, 60A, or 80A
Load switching voltage	AC V _{rms}	24 - 240V, 40 - 480V
Maximum peak voltage	AC V _{pk}	900V
Switch type		Zero Cross (std) or Random
On voltage drop	V AC	1.5V
Leakage current (off state)	mA	≤ 7mA

Input (control)

Control voltage	V	D: 4 - 32VDC or A: 90 - 250VAC
Control current	mA	< 20mA
Turn-on voltage	V _{min}	D: 3VDC / A: 90VAC
Turn-off voltage	V	D: 1VDC / A: 10VAC

Insulation

Insulation resistance		≤ 500MΩ at 500VDC, 50%RH
Dielectric strength	V AC	≥ 2500V

General Data

Operating time	mS	≤ 10ms
Release time	mS	≤ 10ms
Dimensions	L x W x H	60 x 45.1 x 27.5mm
Weight		98g
Ambient temperature	storage	-30 to 80°C
	operating	-30 to 80°C (with derating). A heat sink may be required.

SRA1


solid-state relay - single phase



Ordering Code

S	R	A	1	Z	-	25	K	-	D
Switch Function									
Z	- Zero Crossover								
R	- Random								
Load Current Rating									
10	- 10A								
20	- 20A								
25	- 25A								
30	- 30A								
40	- 40A								
60	- 60A								
80	- 80A								
Load Voltage									
L	- 24 to 240VAC								
K	- 40 to 480VAC								
Control Voltage Input									
A	- 90 to 250VAC								
D	- 4 to 32VDC								

Dimensions

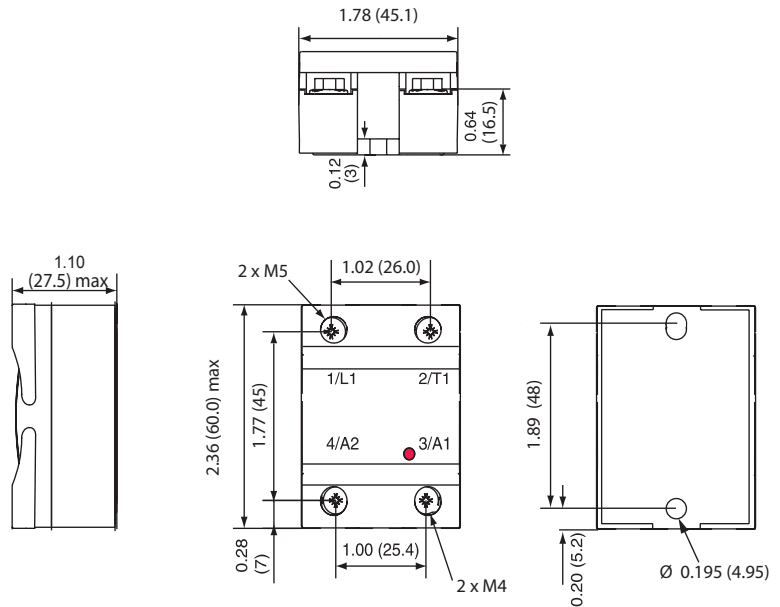

Dimensions in inches (mm)

Fig.2

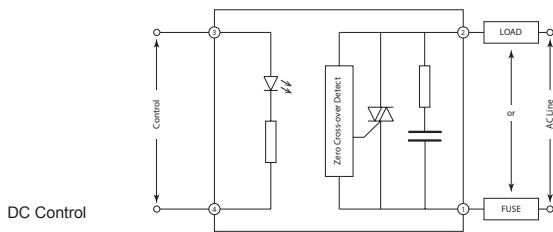


Fig.3

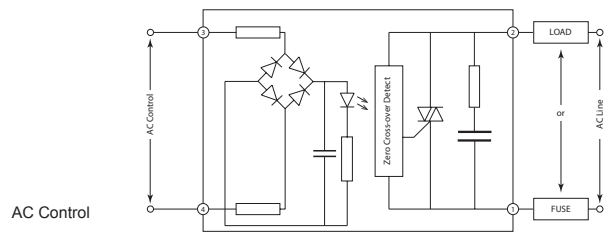


Table 1

SSR Series	SRA1*-10*-*	SRA1*-25*-*	SRA1*-60*-*	SRA1*-80*-*
	SRA1*-15*-*	SRA1*-30*-*		
	SRA1*-20*-*	SRA1*-40*-*		
Current rating	<20A	<40A	<60A	<80A
Heat Sink	DHS01	DHS02	DHS03	DHS04
Heat Sink Rating °C/W	2.19	1.49	1.35	1.07

Fig.4

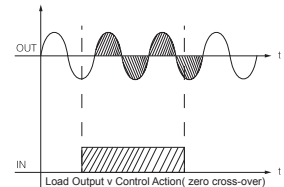


Fig.5

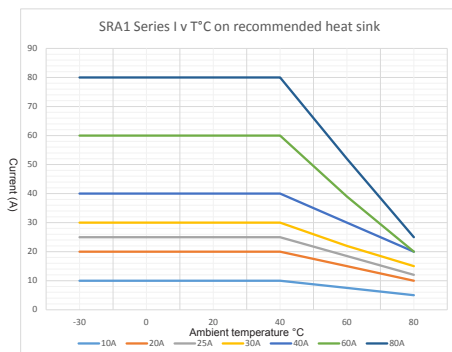


Fig.6


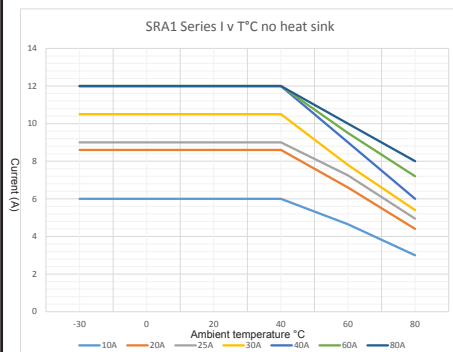


Fig.7

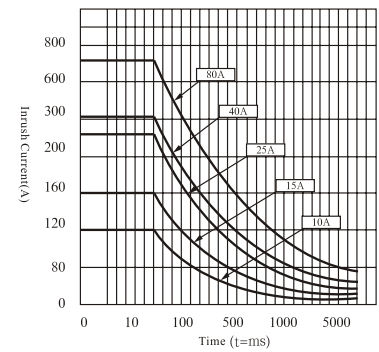

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Durakool](#) manufacturer:

Other Similar products are found below :

[SRA1Z-25K-D](#) [SRA1Z-40K-D](#) [SRA1Z-10K-D](#) [DTP1](#) [D105000](#) [SRA1Z-40K-A](#) [D103000](#) [SRD-SGR2-M03](#) [SRA1Z-25K-A](#) [DG34-1021-36-1012-F](#) [D101000](#) [DM84-2012-35-5012](#) [SRA1Z-60K-D](#) [DG85CM-5021-76-1024](#) [SRA2Z-40K-D](#) [SRA1Z-25L-A](#) [DG85C-8021-75-1024](#) [SIM212-12VDC](#) [DG85B-8011-76-1024](#) [SRA1Z-10K-A](#) [SIM112 16VDC](#) [DG85B-8011-76-1012-DR](#) [SRA1Z-25L-D](#) [SRA1Z-100K-D](#) [SRA1Z-60L-D](#) [A1/2-001](#) [SRA1Z-80K-A](#) [SRA1Z-100L-D](#) [SRA1Z-100K-A](#) [SRA1Z-80L-D](#) [DHS02](#) [SRA1Z-60L-A](#) [SRA1Z-40L-D](#) [SRA1Z-15L-A](#) [SRA1Z-15K-A](#) [SRA1Z-80L-A](#) [DG85B-8011-76-1024-DR](#) [DG85F-7021-76-1024](#) [DG85B-8011-96-1006-M1](#) [DG85B-8011-96-1024-M1](#) [DG85B-8011-96-1012-M1](#) [DG19-8011-15-1012-81](#) [DG85B-8011-96-1024-M1DR](#) [DG85B-8021-96-1012-M1](#) [DG85C-7011-76-1012](#) [DG85C-8021-96-1012-M1](#) [DG85B-8011-76-1012](#) [DZ85AB-5-WH1](#) [DG85C-8021-75-1012](#) [DG85B-8021-75-1012](#)