


Ferrule Type, Fast-Acting Fuses

For 13/32" x 1-1/2" (10.3mm x 38.1mm)


BAN



Dimensional Data

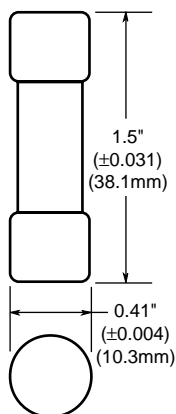

Time-Current Characteristic Curves—Average Melt
(Full Size Curves Available)

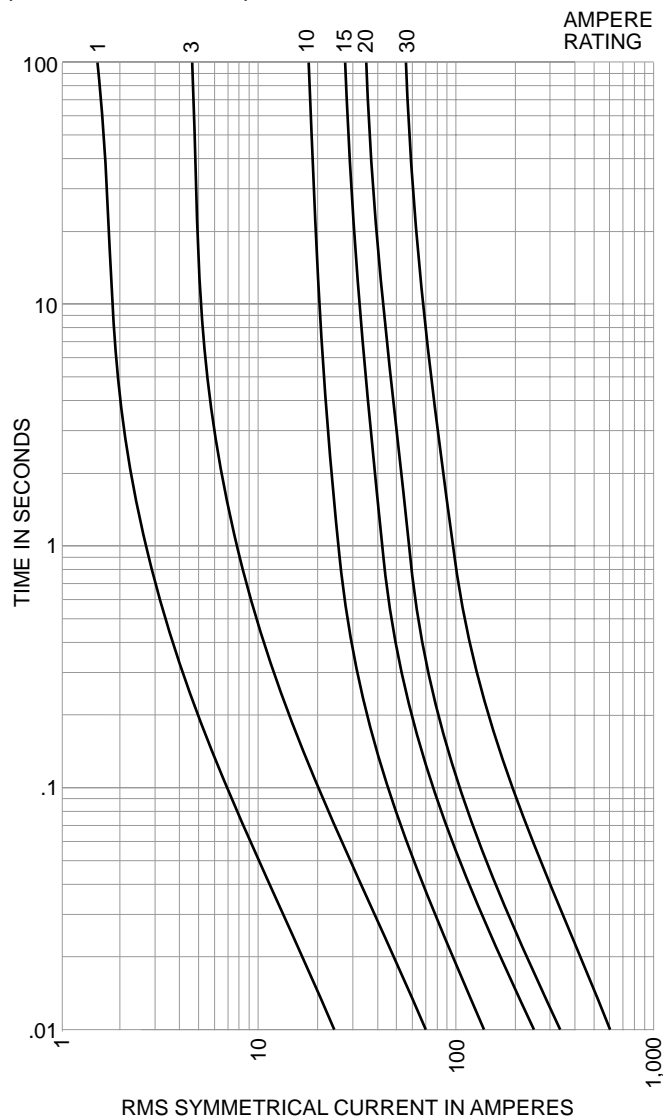

CATALOG SYMBOL: BAN
 13/32" x 1-1/2" (10.3mm x 38.1mm) 5AG
 FERRULE TYPE, FAST-ACTING
 1-30A
 250 VAC
 INTERRUPTING RATING:
 35A (0-1A), 100A (1-1/2-3A), 200A (4-8A),
 750A (10-15A), 10 KA (20-30A)
 BODY MATERIAL: FIBRE TUBE
 FERRULE MATERIAL: BRONZE
 FERRULE PLATING: NICKEL

- Fibre; formerly 5AB.
- Mounts in Buss BM series fuseblocks.

Electrical Ratings (Catalog Symbol and Amperes)

250 Volts AC			
BAN-1	BAN-5	BAN-10	BAN-25
BAN-2	BAN-6	BAN-12	BAN-30
BAN-3	BAN-7	BAN-15	—
BAN-4	BAN-8	BAN-20	—

Carton Quantity and Weight

Ampere Ratings	Carton Qty	Weight*	
		Lbs.	Kg.
1-30	100	1.4	635

*Weight per carton.

CE logo denotes compliance with European Union Low Voltage Directive (50-1000 VAC, 75-1500 VDC). Refer to BIF document #8002 or contact Bussmann Application Engineering at 636-527-1270 for more information.

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this BIF document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Industrial & Electrical Fuses](#) category:

Click to view products by [Eaton](#) manufacturer:

Other Similar products are found below :

[MTH-4](#) [MTH-8](#) [BP/NON-30](#) [NLN2](#) [NLN25](#) [KTN-R-10](#) [LPS-RK-2SP](#) [ABU-35](#) [FLSR100](#) [BLF6](#) [KLK003](#) [LPS-RK-100](#) [LPS-RK-15](#) [LPS-RK-20](#) [LPS-RK-70](#) [LPS-RK-90](#) [NLS10](#) [FRN-R-30ID](#) [FRS-R-20ID](#) [KLK015](#) [CHSF-80](#) [LDFJ350.X](#) [FUSE 5A/32V](#) [FK-1](#) [381280](#) [384515](#) [381050](#) [491335](#) [492138](#) [BAF-4](#) [FRN-R-600](#) [MIC-20](#) [BBS-4/10](#) [BBS-3/4](#) [BBS-1/2](#) [C10G32](#) [C10M20](#) [JJN-100](#) [JJN-15](#) [JJN-60L](#) [KRP-C-700SP](#) [KTK-R-1-1/2](#) [3RU1136-1KB0](#) [LP-CC-12](#) [LP-CC-25](#) [LP-CC-5-6/10](#) [LP-CC-9](#) [LPS-RK-3-2/10SP](#) [0BLN012.T](#) [0FLQ007.T](#) [0NLN006.T](#)