




## TOP VIEW

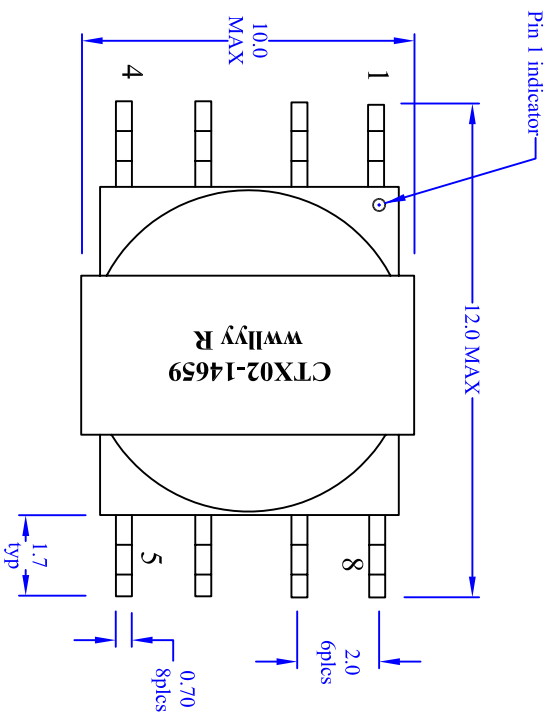

## FRONT VIEW

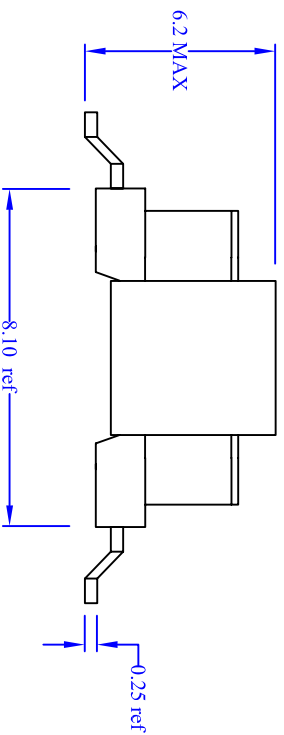


## RECOMMENDED PCB LAYOUT

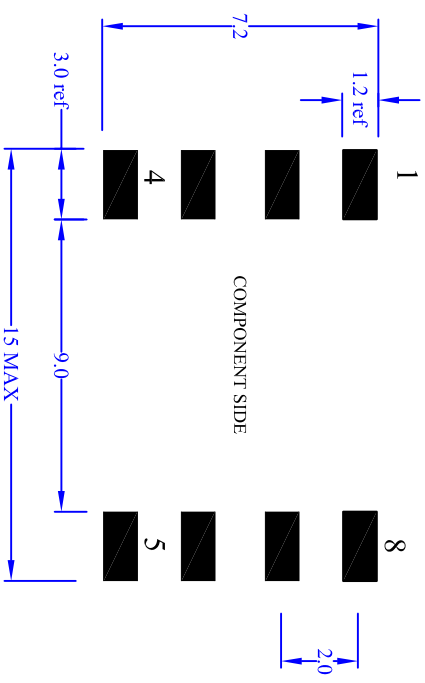

## ELECTRICAL CHARACTERISTICS

OCL @ 100kHz, 0.250Vrms, 0 Adc. Pins (1 - 4); 382 - 711  $\mu$ H  
 DCR @ 20°C pins (1-4). 0.620 W max  
 DCR @ 20°C pins (5-8). 2.50 W max  
 Turns Ratio; pins (1-4):(5-6):(6-8). 1.0 : 1.375 : 1.375 +/- 3%.  
 Hipot @ 500Vdc for 1 second; (5-core)  
 Hipot @ 1250 Vac for 1 second; 1 to 5 & core.

## SCHEMATIC

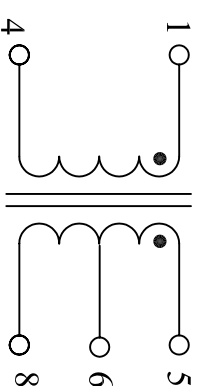

### Notes:

- 1) All Dimensions are in millimeters unless otherwise specified.
- 2) Tolerances are .xx +/- .10, .xxx +/- .05 unless stated otherwise.
- 3) All soldering surfaces to be coplanar within .0.178 mm (0.007").
- 4) willy = (Date Code) R= (Revision Level)
- 5) PCB tolerances are +/- 0.1 unless stated otherwise.

### COOPER ELECTRONIC TECHNOLOGIES

3601 Quantum Blvd, Boynton Beach, FL 33426

Transformer, Push-Pull

300kHz, 547  $\mu$ H

ER 9.5, SMT, gull wing, 8 pads

Size Drawing Number: CTX02-14659

A Revision Level: H Sheet Number: 3 of 5

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Eaton manufacturer:](#)*

Other Similar products are found below :

[BK1-S506-6-3-R](#) [BK-MDL-3-R](#) [BK/ABC-1](#) [BK/MDA-15](#) [GMA-5A](#) [GMA250MA](#) [89096-015](#) [8946K153](#) [8961K155](#) [M22-D-R-GB0/K11](#)  
[M22-L-R/R](#) [6422](#) [6580](#) [CTX20-16-52LP-R](#) [CWL530FI](#) [CXM/CO/GP/R/BB](#) [6HD36](#) [714125](#) [MBO-2](#) [7314K36](#) [7321K2](#) [F02A-1-1/2A](#)  
[F02A-1-1/2AS](#) [F02A-1AS](#) [F02A-2AS](#) [F02A-3/4A](#) [F03A250V12A](#) [F03B125V4A](#) [MCR-4](#) [MDA-2-8/10-R](#) [MDA-30A](#) [MDA-V-1/16](#)  
[F60C500V10AS](#) [F60C500V15AS](#) [7563K84](#) [7634K36](#) [MDQ-3/16](#) [MDQ-7/10](#) [MDQ-V-1/10](#) [MDQ-V-1-1/4](#) [MDQ-V-1/16](#) [MDQ-V-1/2](#)  
[MDQ-V-1/4](#) [MDQ-V-3/16](#) [MDQ-V-3/8](#) [MDQ-V-6/10](#) [MDQ-V-6-1/4](#) [MDV-1-1/2](#) [MDV-3/8](#) [MDV-4](#)