

TRACTION Fuse-Links

20 x 127 Cylindrical Fuses, 2 to 30 Amps



Standards/Approvals:

CE, designed and tested to IEC 60269: part 4

Description: 20x127 Cylindrical fuse-links with or without indicator

Packaging: 10 fuse-links per carton

Technical Data:


Traction Fuse-Links
 Rated Voltage: see table
 Amps: 2 to 30A
 Rated Breaking Capacity: 50kA RMS Sym
 50kA dc

RoHS Compliant

Catalogue Symbol: FWS(amp)A20F
 FWL(amp)A20F
 Add suffix "I" for indicator version

Class of Operation: gS

Dimensional Data:

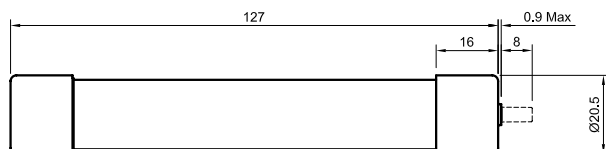

Catalogue Numbers:

Standard Approvals: CE, IEC 60269: part 4


Technical Data: FWS: 2, 6, 8, 10, 12 & 15 Amps
 FWL: 20, 25 & 30 Amps

Part Numbers	Rated Current RMS Amps	I^2t (A ² sec)		Watts Loss	Voltage Ratings	
		Minimum Pre-Arcing	Clearing at 100V dc		ac	dc
FWS-2A20F	2	0.8	2.4	4.4	2100	1000 V
FWS-6A20F	6	27	81	6.7	2100	1000 V
FWS-8A20F	8	64	192	7.6	2100	1000 V
FWS-10A20F	10	118	277	3.0	1400	1000 V
FWS-12A20F	12	170	380	3.4	1400	1000 V
FWS-15A20F	15	209	500	5.0	1400	1000 V
FWL-20A20F	20	675	1550	5.9	1200	1000 V
FWL-25A20F	25	1200	2760	6.5	1200	1000 V
FWL-30A20F	30	1850	4300	7.5	1200	1000 V

TRACTION Fuse-Links

20 x 127 Cylindrical Fuses, 2 to 30 Amps

Time Current Curves

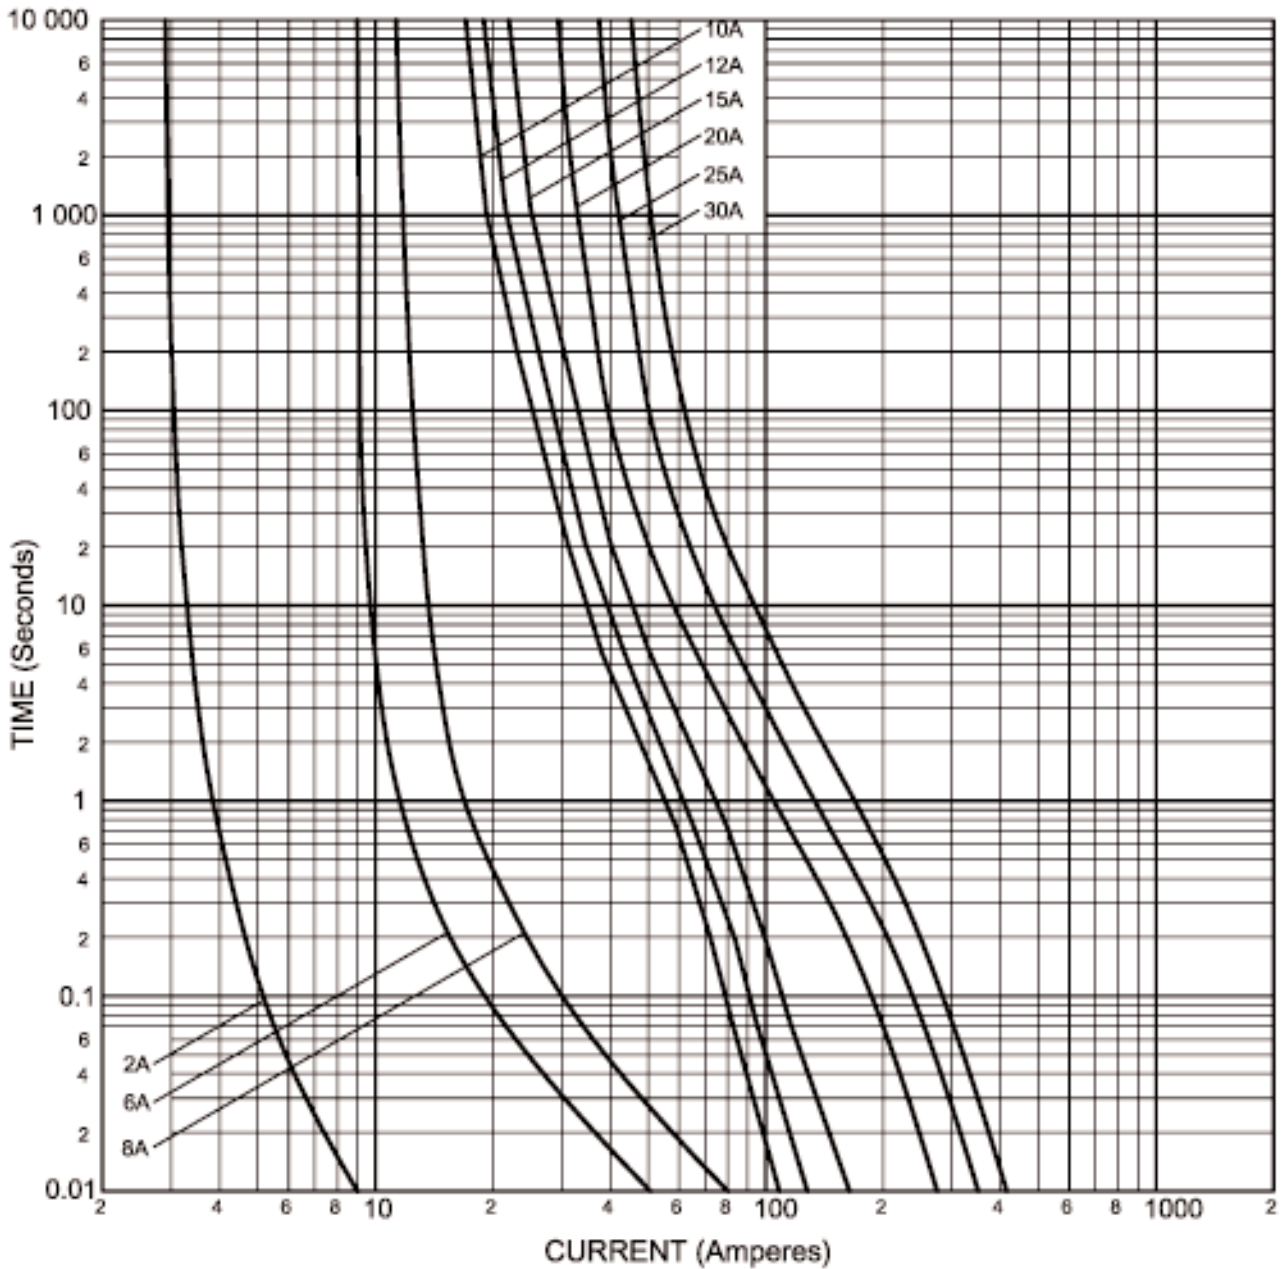

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Specialty Fuses](#) category:

Click to view products by [Eaton](#) manufacturer:

Other Similar products are found below :

[63NZ02GL](#) [714125](#) [722134](#) [F02A-4AS](#) [F02B-1A](#) [80NH00GR-6](#) [FWH-200A](#) [FWP-32A14F](#) [12LCT](#) [12TDLSJ63](#) [REN-3](#) [15.5CAVH2E](#)
[ECF-1](#) [ECF-2](#) [ECF-3](#) [ECF-4](#) [170M0213](#) [170M1369-D](#) [170M3809D](#) [BK/F02B-1A](#) [N-2-1/2](#) [N-3-2/10](#) [NITD2](#) [20D16](#) [KAA-3](#) [KAB-30](#)
[KAW-3](#) [2D16](#) [LKN-125B](#) [16D27SB](#) [16FC](#) [170M1564D](#) [170M2616](#) [170M2668](#) [170M4161](#) [170M4241](#) [170M4699](#) [ESD63](#) [ABS-30](#) [ABS-8](#)
[ACF-15](#) [ACF-30](#) [ACO-30](#) [F02A-10A](#) [SSD10](#) [200NH1M](#) [FWP-25A14FI](#) [FWP-40A14FI](#) [FWP-500A](#) [FWP-63A22FI](#)