


# Pin-Indicating Type

GLD/GBA

Fast-Acting

1/4" x 1 1/4" (6.3mm x 32mm)

**Dimensions - in**

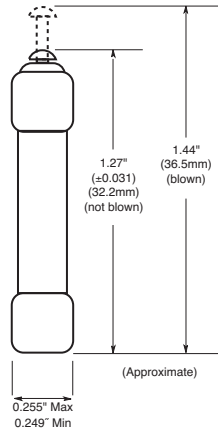

**Catalog Symbol:** GLD/GBA  
 GLB-albaloy-plated indicating pin  
 GBA-red indicating pin


**Non-Time-Delay: Indicating**

**Amp Rating:** 1/2 to 15 Amps

**Agency Information:**

CE, UL Listed, Std. 248-14  
 1/2-5A/125Vac, 10kA AIC  
 Guide JDYX, File E19180  
 UL Recognized, 6A/125Vac, 1kA AIC  
 10-15A/50Vac/dc, 300 AIC  
 Guide JDYX2, File E19180  
 CSA Certified, 1/2-5A/125Vac, 10kA AIC  
 Class 1422-01, File 53787

**Time-Current Characteristic Curves—Average Melt**

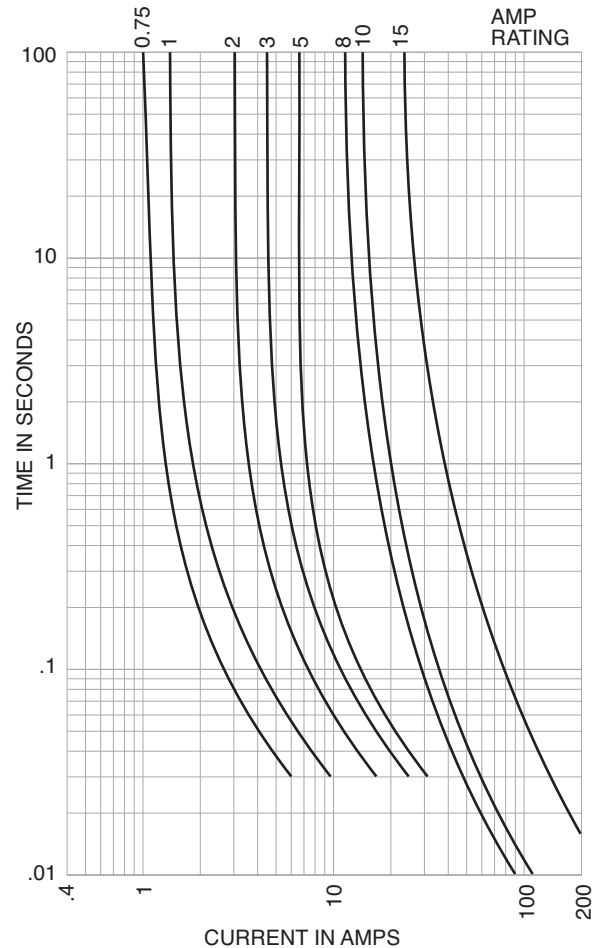

**Electrical Ratings (Catalog Symbol and Amps)**

GLD-1/2	GLD-2	GLD-6
GLD-3/4	GLD-3	GLD-10
GLD-1	GLD-4	GLD-12
GLD-1-1/2	GLD-5	GLD-15
GBA-1/2	GBA-2	GBA-6
GBA-3/4	GBA-3	GBA-10
GBA-1	GBA-4	GBA-15
GBA-1-1/2	GBA-5	

**Carton Quantity and Weight**

Amp Ratings	Carton Qty.	Weight	
		Lbs.	Kg.
1/2-15	100	0.86	0.390

**General Information:**

- Use in power electronic circuits in which a fuse opening must be quickly apparent.
- Opening of fuse results in the ejection of end pin.
- Type **GLD** has an **albaloy-plated** pin for positive, electrical signal circuit activation.
- Type **GBA** has a **red** pin for high visibility.
- The Cooper Bussmann Series 8000 fuse blocks are recommended for visual indication.
- For visual indication use Cooper Bussmann panel-mounted fuseholder HLD (15A maximum)
- Body material: Fiber tube.
- Ferrules: Nickel-plated brass endcaps.

The only controlled copy of this Data Sheet is the electronic read-only version located on the Cooper Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Cooper Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Eaton manufacturer](#):*

Other Similar products are found below :

[BK1-S506-6-3-R](#) [BK-MDL-3-R](#) [BK/ABC-1](#) [BK/MDA-15](#) [GMA-5A](#) [GMA250MA](#) [89096-015](#) [8946K153](#) [8961K155](#) [M22-D-R-GB0/K11](#)  
[M22-L-R/R](#) [6422](#) [6580](#) [CTX20-16-52LP-R](#) [CWL530FI](#) [CXM/CO/GP/R/BB](#) [6HD36](#) [714125](#) [MBO-2](#) [7314K36](#) [7321K2](#) [F02A-1-1/2A](#)  
[F02A-1-1/2AS](#) [F02A-1AS](#) [F02A-2AS](#) [F02A-3/4A](#) [F03A250V12A](#) [F03B125V4A](#) [MCR-4](#) [MDA-2-8/10-R](#) [MDA-30A](#) [MDA-V-1/16](#)  
[F60C500V10AS](#) [F60C500V15AS](#) [7563K84](#) [7634K36](#) [MDQ-3/16](#) [MDQ-7/10](#) [MDQ-V-1/10](#) [MDQ-V-1-1/4](#) [MDQ-V-1/16](#) [MDQ-V-1/2](#)  
[MDQ-V-1/4](#) [MDQ-V-3/16](#) [MDQ-V-3/8](#) [MDQ-V-6/10](#) [MDQ-V-6-1/4](#) [MDV-1-1/2](#) [MDV-3/8](#) [MDV-4](#)