


Ferrule Type, Fast-Acting Fuses

For 13/32" x 1-3/8" (10.3mm x 35mm)

KTQ



Dimensional Data



KTQ Fuse Series Discontinued Effective July 31, 2013
Recommended Replacement is the BBS Series.
See Data Sheet # 2010 for Specifications.

Catalog Symbol: KTQ
 Ferrule Type, Fast-Acting
 1-6A
 600Vac

Agency Information:

UL Recognized, STD 248-14, (Guide # JDX2, File E19 180)

Interrupt Rating: 10kA RMS Sym.

Body Material: Melamine

Ferrule Material: Bronze

Ferrule Plating: Nickel


- For control, gas-discharge vapor fixture, and HID ballast; electronic circuits.
- Melamine cartridge.
- Slightly more delay than type BBS to override transient currents.
- Mounts in Buss panel-mount fuseholders HPS-L, BM-series blocks, or 13/32" clips.

Electrical Ratings (Catalog Symbol and Amperes)

600 Volts AC	
KTQ-1	KTQ-4
KTQ-1-6/10	KTQ-5
KTQ-2	KTQ-6
KTQ-3	

Test Specifications


Load	Opening Time
110%	Indefinitely
135%	1 hr. (max.)



Recommended fuseblocks/fuseholders for 13/32" x 1-1/2" fuses
 See Data Sheets listed below

- Open fuseblocks - 1104, 2104
- Finger-safe fuseholders - 1109, 1102, 1103, 1151
- Panel-mount fuseholders - 2114, 2113, 2108, 2112, 2109, 2140
- In-line fuseholders - 2127, 2126

Time-Current Characteristic Curves—Average Melt
 (Full Size Curves Available)

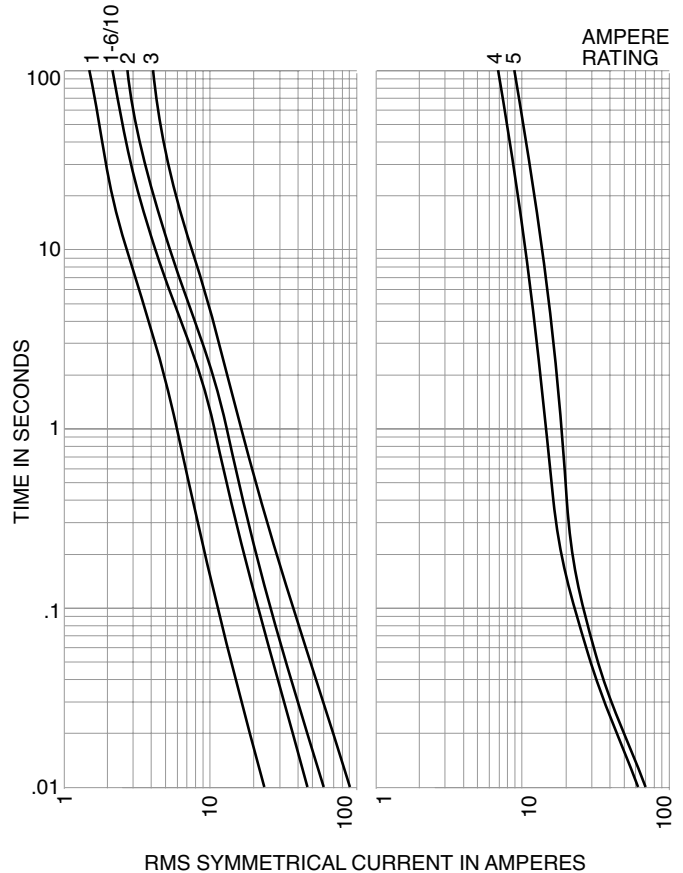

CE CE logo denotes compliance with European Union Low Voltage Directive (50-1000Vac, 75-1500Vdc). Refer to Data Sheet: 8002 or contact Bussmann Application Engineering at 636-527-1270 for more information.

The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All other copies of this BIF document are uncontrolled. Bussmann reserves the right to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information. This document should be tested by the user in all possible applications.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Industrial & Electrical Fuses](#) category:

Click to view products by [Eaton](#) manufacturer:

Other Similar products are found below :

[MTH-4](#) [MTH-8](#) [BCC-1-8/10](#) [BP/FNM-5](#) [BP/NON-30](#) [KTN-R-10](#) [LPS-RK-2SP](#) [ABU-15](#) [ABU-25](#) [ABU-3](#) [ABU-35](#) [ABU-50](#) [ABU-60](#)
[TCF40RN](#) [BCF-10](#) [3TX4431-0A](#) [BK-SC-20](#) [FNM-6-1-4](#) [FRN-R-6-1-4](#) [FRS-R-3-12](#) [KTK-1-1-2](#) [BBS-610](#) [FNM-6-10](#) [FNQ-R-1-1-4](#) [FRN-](#)
[R-30ID](#) [FRS-R-20ID](#) [CL03AB00M6](#) [CHSF-80](#) [BBS-1/10](#) [LDFJ350.X](#) [BAF-4](#) [KRP-C-1000SP](#) [TIA10](#) [MIC-20](#) [BBS-10](#) [BBS-4/10](#) [BBS-3/4](#)
[BBS-1/2](#) [C10G32](#) [C10M20](#) [JJN-100](#) [JJN-15](#) [JJS-2](#) [KRP-C-700SP](#) [KTK-7](#) [KTK-R-1-1/2](#) [KTK-R-9](#) [3RU1136-1KB0](#) [LP-CC-12](#) [LP-CC-25](#)