

- NEW TYPES -



8200J Series

Tubeaxial



80x80x38mm high performance

- DC fans with electronically commutated external rotor motor. Fully integrated commutation electronics.
- Innovative impeller design with winglets.
- Compact design with high power density. Electronic protection against reverse polarity, blocking and over-loading.
- Fan of fiberglass reinforced plastic. PBT housing, PA impeller.
- Air exhaust over struts. Rotational direction CW looking at rotor.
- Electrical connection via 2 leads AWG 24, TR 64. Stripped and tinned ends.
- UL, CSA, VDE approvals on most models, please contact application engineering.

Part Number	Curve	CFM @ Q	VDC	Volt. Range	Power (W)	dBA	Bel	Temp Range C	Bearing Type	Features	Wgt. (lbs)
8212JN	1	78	12	7 to 13.8	10	55	6.6	-20...+70	Ball	Leads	0.35
8212JH3	2	112	12	6 to 13.8	25	66	7.3	-20...+70	Ball	Leads	0.44
8212JH4	3	131	12	6 to 13.8	39	71	8.0	-20...+70	Ball	Leads	0.44
8214JN	1	78	24	18 to 26.4	10	55	6.6	-20...+70	Ball	Leads	0.35
8214JH3	2	112	24	12 to 27.6	25	66	7.3	-20...+70	Ball	Leads	0.44
8214JH4	3	131	24	12 to 27.6	38	71	8.0	-20...+70	Ball	Leads	0.44
8218JN	1	78	48	36 to 53	11	55	6.6	-20...+70	Ball	Leads	0.35
8218JH3	2	112	48	20 to 58	25	66	7.3	-20...+70	Ball	Leads	0.44
8218JH4	3	131	48	20 to 58	36	71	8.0	-20...+70	Ball	Leads	0.44

8200JH3 and JH4 also as standard with PWM control input and tach output, with the same air performance and part specifications as the base part number:

Base PN	PN with options:	
	PWM (P)	Tach Output (Z)
8212JH3	8212J/2H3P	8212J/2H3Z
8214JH3	8214J/2H3P	8214J/2H3Z
8218JH3	8218J/2H3P	8218J/2H3Z
8212JH4	8212J/2H4P	8212J/2H4Z
8214JH4	8214J/2H4P	8214J/2H4Z
8218JH4	8218J/2H4P	8218J/2H4Z

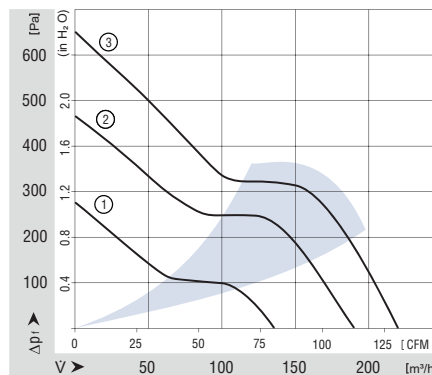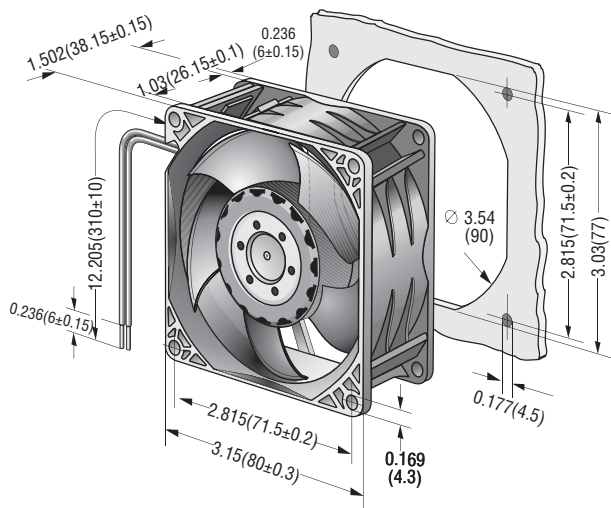

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [DC Fans](#) category:

Click to view products by [ebm papst](#) manufacturer:

Other Similar products are found below :

[614R](#) [AUB0612L](#) [AFB0948HH-S687](#) [G2E085-AA05-10](#) [4318/12T](#) [AUB0912H-F00](#) [3412N/2ME](#) [W2G110-AM39-01](#) [8412GLV](#) [8412NGL-12](#) [6448-384](#) [4114N/17-251](#) [622/2N](#) [4318/2R](#) [4412F/2D](#) [424JMU](#) [4414/2HH](#) [4112 N/12GL-175](#) [9GA0912F402](#) [9GA0812B20011](#) [AFB0824SHBAV1](#) [DV5214/2NP-230](#) [9GA0912H4021](#) [THC1548MGDJJ](#) [GFB1224SHG](#) [8500NU](#) [DC0401012V2B-3T0](#) [3254J/2HPU](#) [9A0612G402](#) [AD5012HB-C71](#) [AD5012MB-C71](#) [EF92251S3-1000U-A99](#) [PF80251B3-000U-Q99](#) [026758A](#) [3258J/2H3PU????](#) [412/2H](#) [4292](#) [MF60152V1-1000U-G99](#) [3610KL-04W-B50-D00](#) [EE92251B1-000U-G99](#) [8218J/2H4P](#) [4318NN](#) [4318NH3](#) [4314NL](#) [4312NM](#) [MITX-CORE-HTSNK](#) [ME45101V1-000U-A99](#) [OD1238-24HBIP55](#) [4312NHH](#) [612N/2GH](#)