


# QK10A Series

## Crossflow Blower


467...1100mm x Ø 92mm

- AC blower with single phase motor. 90° or 180° air flow. Ball bearings and terminals. Max ambient temperature of 40 C.
- Wide, even air flow distribution. "V" shaped guide vane suppresses noise.
- Fan propeller of aluminium and air duct housing of sheet steel.
- Rotational direction CW looking at rotor.
- UL, CSA, VDE approvals on some models. Please contact application engineering

Part Number	Curve	CFM @ 0	VAC	Hertz	Power (W)	dBA	Max Amb. Temp. C	Bearing Type	Features	Capacitor (µF)	Wgt. (lbs)
QK10A-2/111589	4	940	115	50/60	580	86	40	Ball	Leads	30	20.0
QK10A-4/110756	1	410	230	50/60	85	68	40	Ball	Leads	2	10.0
QK10A-2/210955	2	900	230	60	150	66	40	Ball	Leads	3	21.0
QK10A-4/120844	3	950	230	60	670	86	40	Ball	Leads	8	22.0

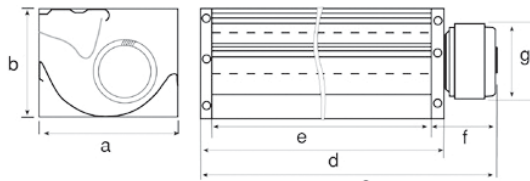

PART NUMBER	a	b	c	d	e	f	g
.../110756	7.87 (200)	6.89 (175)	19.21 (488)	16.51 (420)	14.88 (378)	3.39 (86)	3.62 (92)
.../120844	7.87 (200)	6.89 (175)	43.31 (1100)	40.16 (1020)	38.58 (980)	4.09 (104)	3.62 (92)
.../210955	7.87 (200)	6.89 (175)	25.39 (645)	20.47 (520)	18.89 (480)	5.71 (145)	5.39 (137)
.../111589	7.87 (200)	6.89 (175)	25.39 (645)	20.47 (520)	18.90 (480)	5.71 (145)	5.39 (137)

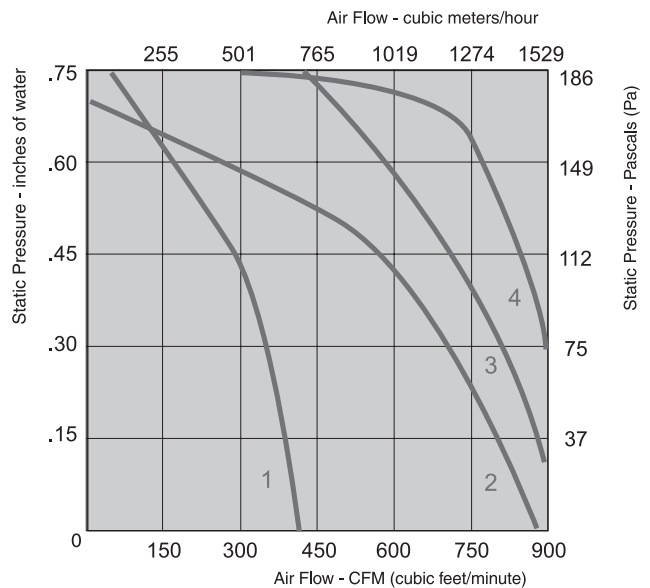

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [ebm papst](#) manufacturer:*

Other Similar products are found below :

[3312M](#) [M4Q045-DA05-E4](#) [4114N](#) [8218J/2H3](#) [W1G200-EA95-68](#) [DV6248U](#) [6224NT](#) [M4Q045-CA03-75](#) [M4Q045-CF01-75](#) [D2E133-DM27-D8](#) [8314S](#) [8506A](#) [G2E140-AL30-48](#) [R1G225-AG15-11](#) [R2D270-AB12-09](#) [R2E190-RA50-21](#) [R2E225-BD40-21](#) [R3G310-AL09-30](#) [R4E400-AP15-10](#) [REF100-11/14](#) [RER160-28/56S](#) [9496-2-4039-1](#) [A2D240-AA02-10](#) [A2D250-AA06-52](#) [G2E120-FV56-16](#) [G2E160-AY47-57](#) [G2S085-AA19-15](#) [QR06A-2/106349](#) [R1G250-AQ21-52](#) [R2E180CH0312](#) [R2E225-BD92-36](#) [R3G175-AF25-02](#) [LZ27](#) [RG125-19/12N/2](#) [RH31M-6/104372](#) [RH56M-6/204689](#) [3800](#) [RLF100-11/18](#) [D1G133-DC17-52](#) [D2E097-BI56-48](#) [55416.30320](#) [3314U](#) [D4E180-BA04-18](#) [4112NHH](#) [412/2H-048](#) [412FH-132](#) [W2E300-CP02-37](#) [W2G110-AK43-83](#) [W4D350-CA06-14](#) [422JM](#)