

The ECS-75SMF Miniature SMD Monolithic Crystal Filter offers a narrow bandwidth and a 4 pole response in a 5 x 7 package.

Request a Sample

### ECS-75SMF Series



- 5 x 7 Footprint
- 4 Pole Filter
- Tape and Reel Packaging

## OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS

Part Number *	Center Frequency $F_o$	Passband Min.		Stopband Max.		Attenuation Guaranteed Min.		Ripple Max.	Loss Max.	Terminating Impedance	Operating Temperature	No. of Poles
	MHz	dB	KHz	dB	KHz	dB	KHz	dB	dB	$\Omega$ /pF	$^{\circ}\text{C}$	
ECS-75SMF45A7.5B	45.000	3	$\pm 3.75$	30	$\pm 12.5$	80	-910	1.0	4.0	350//6.5	-30 ~ +80	4
ECS-75SMF45A20B	45.000	3	$\pm 10.0$	25	$\pm 25.0$	80	-910	1.0	3.0	500//2.5	-30 ~ +80	4
ECS-75SMF45A30B	45.000	3	$\pm 15.0$	30	$\pm 50.0$	80	-910	1.0	3.0	1000//1.0	-30 ~ +80	4
ECS-75SMF70.05A20B	70.050 *	3	$\pm 10.0$	20	$\pm 25.0$	70	-910	1.0	4.0	2500//1.0	-30 ~ +80	4

\* Indicates 3<sup>rd</sup> Overtone

## Package Dimensions (mm)

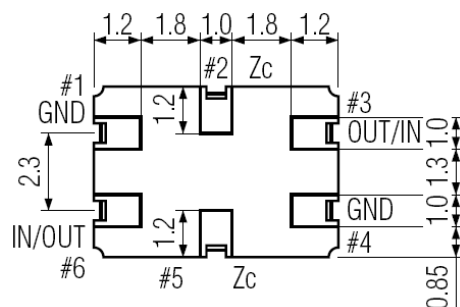
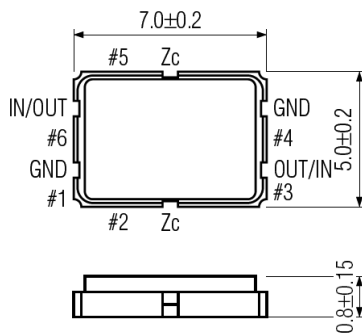


Figure 1) Top, Side and Bottom views

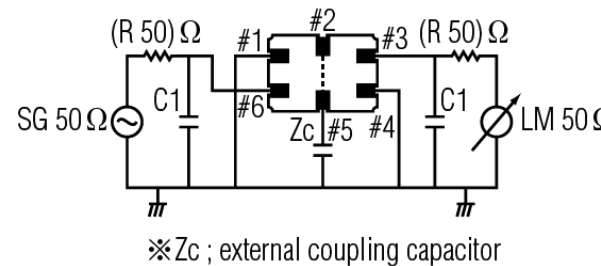


Figure 2) Test Circuit

Pin Connections	
#1	Ground
#2	Zc
#3	Out/In
#4	Ground
#5	Zc
#6	In/Out




Figure 3) Land Pattern

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [ECS Inc manufacturer](#):*

Other Similar products are found below :

[700-TFL-9001](#) [706-TFL-UM1](#) [ECOC-2522-100.000-3FC](#) [ECOC-2522-10.000-3FC](#) [ECOC-2522-10.000-3GC](#) [ECOC-2522-10.000-3HC](#)  
[ECOC-2522-16.384-3GS](#) [ECOC-2522-20.000-3FC](#) [ECOC-2522-38.880-3FC](#) [ECS-018-13-1X](#) [ECS-030-S-1](#) [ECS-035-18-4X-DU](#) [ECS-035-S-5PX-TR](#) [ECS-036-20-28A](#) [ECS-040-18-5PX-JES-TR](#) [ECS-040-20-4X](#) [ECS-040-20-4X-DU](#) [ECS-040-S-4](#) [ECS-040-S-5P](#) [ECS-040-S-5PX-TR](#) [ECS-041-20-5PXDND-TR](#) [ECS-042-16-5PX-TR](#) [ECS-049-20-1](#) [ECS-049-20-5PXDND-TR](#) [ECS-049-S-1](#) [ECS-052-32-5PX-TR](#) [ECS-060-20-4X-DU](#) [ECS-060-20-5PX-DN-TR](#) [ECS-060-20-5PX-TR](#) [ECS-060-S-1](#) [ECS-073-20-20A-N-TR](#) [ECS-076-20-1X](#) [ECS-080-18-1X](#) [ECS-080-18-23A-JGN-TR](#) [ECS-080-18-4DN](#) [ECS-080-18-5PX-JES-TR](#) [ECS-080-20-5PX-TR](#) [ECS-080-S-1X](#) [ECS-092.1-20-5PX-TR](#) [ECS-098.3-18-23A-JGN-TR](#) [ECS-100-10-30B-CKL-TR](#) [ECS-100-12-30BQ-ADS-TR](#) [ECS-1.00-12.5-13X](#) [ECS-100-18-20BQ-DS](#) [ECS-100-18-23A-JGN-TR](#) [ECS-100-18-23B-JTM-TR](#) [ECS-100-18-23B-JTN-TR](#) [ECS-100-18-23G-JGN-TR](#) [ECS-100-18-30B-AGN-TR](#) [ECS-100-18-30BQ-DS](#)