

The ECS-96SMF 21.400 MHz Miniature SMD Monolithic Crystal Filter offers a narrow bandwidth and a 2 pole response in a 5 x 7 package.

Request a Sample



- 5 x 7 Footprint
- 2 Pole Filter
- Tape and Reel Packaging

OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS

Part Number *	Center Frequency Fo	Passband Min.		Stopband Max.		Attenuation Guaranteed Min.		Ripple Max.	Loss Max.	Terminating Impedance	Operating Temperature	No. of Poles
	MHz	dB	KHz	dB	KHz	dB	KHz	dB	dB	Ω/μF	°C	
ECS-96SMF21A7.5	21.400	3	± 3.75	20	± 18.0	70	-910	1.0	2.0	850//6.0	-30 ~ +80	2
ECS-96SMF21A15	21.400	3	± 7.5	18	± 25.0	70	-910	1.0	2.0	1500//1.5	-30 ~ +80	2
ECS-96SMF21A20	21.400	3	± 10.0	10	± 30.0	70	-910	1.0	2.0	1800//1.0	-30 ~ +80	2
ECS-96SMF21A30	21.400	3	± 15.0	15	± 45.0	70	-910	1.0	2.0	2000//0.5	-30 ~ +80	2

Package Dimensions (mm)

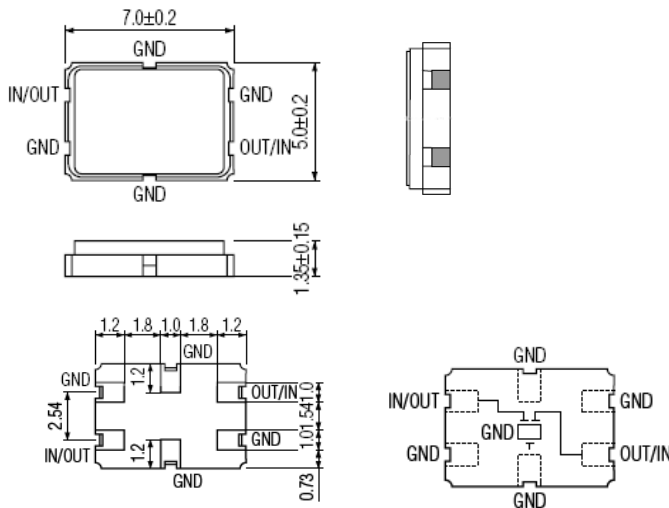


Figure 1) Top, Side and Bottom views

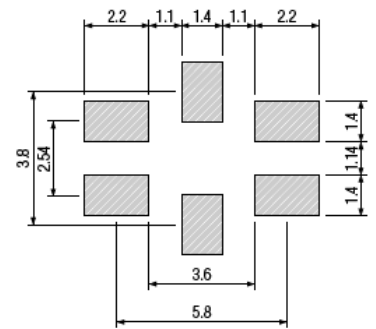


Figure 2) Land Pattern

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ecs inc](#) manufacturer:

Other Similar products are found below :

[ECS-122.8-20-4 X](#) [ECS-3518-800-B-TR](#) [ECS-2100A-2.4576MHZ](#) [ECS-TXO-5032-100-TR](#) [ECS-35-17-4XDN](#) [ECS-160-20-46X](#) [ECS-160-S-20A-TR](#) [ECS-P53-33.000MHZ-B](#) [ECS-80-8-30Q-VY-TR](#) [ECS-110.5-20-4](#) [ECS-320-8-37CKM](#) [ECXV-H37C2N-68.000](#) [ECS-320-12-37-CKM-TR](#) [ECOC-2522-16.384-3GS](#) [ECXV-P37C2N-12.000](#) [ECXV-P37C2M-110.000](#) [ECS-P8F3-1.000-AN](#) [ECOC-2522-10.000-3FC](#) [ECS-36-18-4X](#) [ECOC-2522-38.880-3FC](#) [ECOC-2522-10.000-3GC](#) [ECS-P143-10-AN](#) [ECX-L37BN-1030.000](#) [ECS-.327-12.5-34R-TR](#) [ECS-80-20-1X](#) [ECS-P55-39.2832MHZ-BN](#) [ECOC-2522-20.000-3FC](#) [ECOC-2522-10.000-3HC](#) [ECS-SR1-8.00-B-TR](#) [ECXV-P37C2N-122.880](#) [ECS-.327-CDX-1082](#) [ECS-TXO-3225MV-160-TR](#) [ECS-80-16-28AX-TR](#) [ECOC-2522-100.000-5FC](#) [ECOC-2522-100.000-3FC](#) [ECXV-P37C2M-640.000](#) [ECX-L27CM-62.500](#) [ECS-2532VXO-270B-2.8](#) [ECS-36-S-1X](#) [ECXV-L37C2N-148.500](#) [ECX-L35BN-100.000](#) [ECS-200-8-37-CWN-TR](#) [ECS-080-18-1X](#) [ECS-120-32-5P-TR](#) [ECS-147.4-20-7S-TR](#) [ECS-327MV-CN-TR](#) [ECX-P35BN-125.000](#) [ECS-240-20-4X](#) [ECS-.327-12.5-34S-TR](#) [ECS-160-18-23A-EN-TR](#)