

The ECS-96SMF 45.000 MHz Miniature SMD Monolithic Crystal Filter offers a narrow bandwidth and a 2 pole response in a 5 x 7 package.

[Request a Sample](#)



- 5 x 7 Footprint
- 2 Pole Filter
- Tape and Reel Packaging

### OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS

Part Number *	Center Frequency Fo	Passband Min.		Stopband Max.		Attenuation Guaranteed Min.		Ripple Max.	Loss Max.	Terminating Impedance	Operating Temperature	No. of Poles
	MHz	dB	KHz	dB	KHz	dB	KHz	dB	dB	Ω/μF	°C	
ECS-96SMF45A7.5	45.000	3	± 3.75	20	± 25.0	70	-910	1.0	2.0	650//3.5	-30 ~ +80	2
ECS-96SMF45A12	45.000	3	± 6	15	± 20.0	70	-910	1.0	2.0	650//5.0	-30 ~ +80	2
ECS-96SMF45A15	45.000	3	± 7.5	15	± 25.0	70	-910	1.0	2.0	560//6.0	-30 ~ +80	2
ECS-96SMF45A30	45.000	3	± 15	15	± 60.0	70	-910	1.0	2.0	1200//1.8	-30 ~ +80	2

### Package Dimensions (mm)

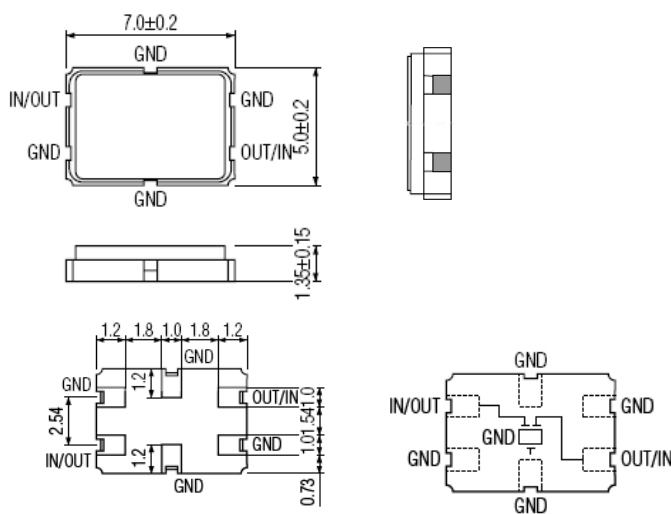


Figure 1) Top, Side and Bottom views

<Top View>

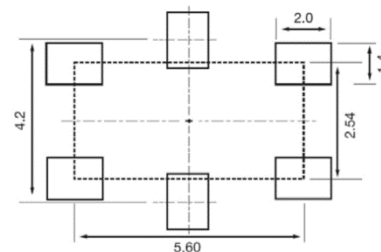


Figure 2) Land Pattern

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Crystals](#) category:*

*Click to view products by [ECS Inc](#) manufacturer:*

Other Similar products are found below :

[MC405 32.0000K-R3:PURE SN](#) [7B-27.000MBBK-T](#) [MP1-8.0 99-BU](#) [9B-15.360MBBK-B](#) [PTX-A2JM-10.000M](#) [9C-7.680MBBK-T](#) [H10S-12.000-18-EXT-TR](#) [R38-32.768-12.5-5PPM-NPB](#) [BTD1062E05A-513](#) [21U15A-21.4MHZ](#) [RTX-781DF1-S-20.950](#) [LFXTAL066198Cutt](#) [9C-14.31818MBBK-T](#) [A-11.000MHZ-27](#) [SPT2A-.032768B](#) [SPT2A.032768G](#) [SSPT7F-9PF20-R](#) [FX325BS-38.88EEM1201](#) [MP-1-25.000MHZ-3L](#) [MP-1-6.000MHZ](#) [LFXTAL065253Cutt](#) [LFXTAL066431Cutt](#) [XT9S20ANA14M7456](#) [XT9SNLANA16M](#) [646G-24-2](#) [7B-30.000MBBK-T](#) [6504-202-1501](#) [6526-202-1501](#) [BTJ120E02C](#) [SG636PCE-20.000MC](#) [3404](#) [CM315D32768EZFT](#) [C1E-24.000-7-2020-R](#) [C1E-19.200-12-1530-X-R](#) [C1E-16.000-12-1530-X-R](#) [ABM11-16.000MHZ-9-B1U-T](#) [FL5000014](#) [EUCA18-3.1872M](#) [425F35E027M0000](#) [17196](#) [ABM3-13.52313MHZ-10-B4Y-T](#) [MS3V-T1R-32.768kHz-7pF-20PPM-TA-QC-Au](#) [VXM7-1C1-16M000](#) [MS1V-T1K-32.768kHz-10pF-20PPM-TA-QC-Au](#) [MS3V-T1R-32.768kHz-9pF-20PPM-TA-QC-Au](#) [ECS-80-18-30-JGN-TR](#) [17000](#) [17301](#) [16875](#)