

The ECS-SR-B Series SMD ceramic resonator includes built-in capacitors for simplification of oscillator circuits and reduces component count. The SMD ceramic resonator is an excellent low cost frequency control solution when absolute frequency accuracy is not important.

FEATURES

- Low profile SMD package
- Wide frequency range
- Built-in load capacitor
- Tape & Reel packaging

PART NUMBERING GUIDE "EXAMPLE"

| MANUFACTURER | PACKAGE TYPE | FREQUENCY | VERSION | TAPE AND REEL PACKAGING |
|--------------|--------------|-----------|---------|-------------------------|
| ECS | - SR1 | - 4.00 | - B | - TR |

Sample Part Number: ECS-SR1-4.00-B-TR, Tape & Reel Packaging

OPERATING CONDITIONS/ELECTRICAL CHARACTERISTICS

| PART NUMBER * | FREQUENCY RANGE (MHz) | FREQUENCY ACCURACY @ 25°C (%) | FREQUENCY STABILITY -20° ~ 80°C (%) | AGING FOR TEN YEARS (%) | RESONANT RESISTANCE (Ω) MAX. | INTERNAL CAPACITANCE C1 & C2 | INSULATION RESISTANCE @ 10 VDC |
|----------------|-----------------------|-------------------------------|-------------------------------------|-------------------------|------------------------------|------------------------------|--------------------------------|
| ECS-SR1-□-□□-B | 2.00 ~ 8.0 | ±0.5 | ±0.3 | ±0.3 | 40 | 30 pF | 100 M Ω Min. |
| ECS-SR2-□-□□-B | 8.01 ~ 13.00 | ±0.5 | ±0.3 | ±0.3 | 40 | 30 pF | 100 M Ω Min. |
| ECS-SR3-□-□□-B | 13.1 ~ 20.00 | ±0.5 | ±0.3 | ±0.3 | 30 | 30 pF | 100 M Ω Min. |
| ECS-SR4-□-□□-B | 20.1 ~ 30.00 | ±0.5 | ±0.3 | ±0.3 | 55 | 30 pF | 100 M Ω Min. |

Complete part number to include frequency i.e. ECS-SR1-4.00-B-TR

PACKAGE DIMENSIONS (mm)

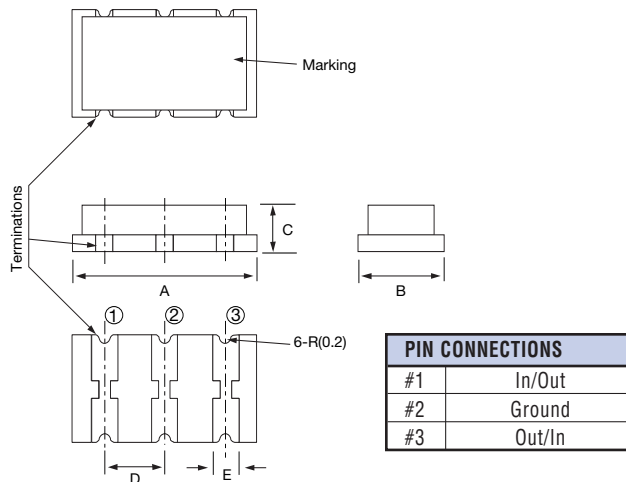


Figure 1) ECS-SR-B Series - Top, Side, Bottom & End views




Figure 2) Land Pattern

| PACKAGE TYPE | DIMENSIONS (mm) | | | | |
|--------------|-----------------|-----|-----|-----|-----|
| | A | B | C | D | E |
| ECS-SR1 | 7.5 | 3.3 | 2.2 | 2.5 | 1.5 |
| ECS-SR2 | 8.3 | 3.5 | 1.8 | 2.5 | 1.0 |
| ECS-SR3 | 6.0 | 3.5 | 1.8 | 1.9 | 1.2 |
| ECS-SR4 | 6.0 | 5.0 | 1.8 | 1.9 | 1.2 |

| PACKAGE TYPE | DIMENSIONS (mm) | | | |
|--------------|-----------------|-----|-----|-----|
| | A | B | C | D |
| ECS-SR1 | 2.5 | 1.5 | 4.0 | 1.7 |
| ECS-SR2 | 2.5 | 1.2 | 4.7 | 1.2 |
| ECS-SR3 | 1.9 | 1.2 | 4.2 | 1.2 |
| ECS-SR4 | 1.9 | 1.2 | 5.5 | 1.2 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Resonators](#) category:

Click to view products by [ECS Inc](#) manufacturer:

Other Similar products are found below :

[B39431R820H210](#) [ECS-HFR-40.00-B-TR](#) [CSTLS4M00G53Z-A0](#) [ECS-CR2-16.00-A-TR](#) [ECS-HFR-20.00-B-TR](#) [ECS-CR2-20.00-A-TR](#)
[RO3164E-3](#) [CSTNE16M0V510000R0](#) [CSTNE14M7V510000R0](#) [AWSCR-4.19CRLB-C15-T3](#) [AWSCR-4.91CRLB-C15-T3](#) [AWSCR-5.00CPLB-C30-T4](#) [CSTNE8M00GH5C060R0](#) [9AC04194152080D2JB](#) [CSTCR4M91G55B-R0](#) [FC-12M32.768KHZ9PF20PPM](#)
[7Y032768NW2](#) [ASR433.42E-T](#) [146-32.768-12.5-20-20/A](#) [ZTA 3.68MG](#) [X1A000091000500](#) [X1A0000910001](#) [AWSCR-25.00CW-T](#)
[AWSZT-12.00MWD-T](#) [ECS-SR1-4.19-B-TR](#) [7C024000HW1](#) [7C012000IW1](#) [7C012000MW1](#) [7C016000HW1](#) [7C016000MW1](#)
[7C032000IW1](#) [7C016000RW1](#) [7C026000MW1](#) [7C040000HW1](#) [7C012000RW1](#) [7C024000MW1](#) [7C026000HW1](#) [7C024576RW1](#)
[X201632MKB4SI](#) [7C027000MW1](#) [7E25000E18UCG](#) [7E50000E18UCG](#) [XYCCCLNANF-16.000000MHZ](#) [XYDBPCNANF-12MHZ](#)
[XYDBBCNANF-16.000000MHZ](#) [XYDBBCNANF-24.000000MHZ](#) [XYHCCLNANF-24.000000MHZ](#) [XYBBCLNANF-26.000000MHZ](#)
[CM4012M00020T8188026](#) [CM4016M00009T8188027](#)