

28 PIN SOP SOCKET ADAPTER

Model : PA28SO28D-EO-300

These adapters connect the pins of a 28 pin SOP device to a 28 pin DIP equivalent. They accept a SOP device and plug into a DIP socket.



Order No.


► PA28SO28D-EO-300

Socket manufacture (Enplas), Socket type (Open)

The PA28SO28D-EO-300 socket adapter accepts with the device family below :

ATMEL AT17C65	ATMEL AT17LV256
ATMEL AT17C128	ATMEL ATV750B(L)
ATMEL AT17C256	ATMEL ATF20V8B(Q)(L)
ATMEL AT17LV65	ATMEL AT89C1051
ATMEL AT17LV128	ATMEL AT27LV520

The SOP socket accepts packages with the dimensions listed below :

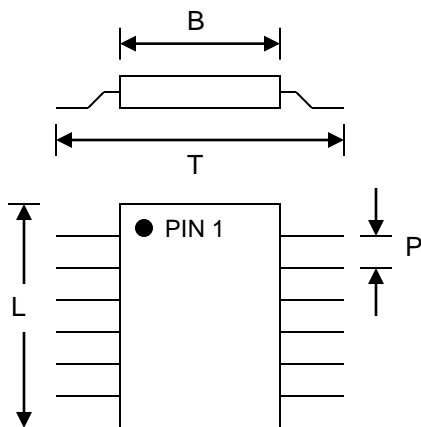

Body	7.8mm typ (300mil)
Tip	11.6mm
Length	n/a
Pitch	1.27mm (50mil)

The following chart shows the connections from the SOP socket to the adapter's DIP plug.

SOP28	DIP28
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
26	26
27	27
28	28

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [PCBs & Breadboards](#) category:

Click to view products by [EEtools](#) manufacturer:

Other Similar products are found below :

[8004](#) [8007](#) [8016](#) [8017](#) [8028](#) [8029](#) [1268-12](#) [1268-10](#) [1320833-1](#) [923252-R](#) [3410](#) [3396](#) [15107](#) [15101](#) [8006](#) [8015](#) [8018](#) [8019](#) [8020](#) [1268-19](#)
[1268-20](#) [8026](#) [1239-19](#) [SBBTH1520-1](#) [SBBTH1506-1](#) [SBBTH4080-1](#) [SBBTH3030-1](#) [SBBTH1508-1](#) [SBBSM2120-1](#) [SBB2808-1](#)
[SBB2805-1](#) [SBB1605-1](#) [SBB1602-1](#) [SBB1005-1](#) [SBB1002-1](#) [3426](#) [32P15WE](#) [ZAS1X206203XRPU160](#) [SBBTH3040-1](#) [SBB0004-1](#)
[SBB830-QTY10](#) [7115](#) [923749-I](#) [RE909](#) [RE914](#) [RE915](#) [RE917](#) [RE935-02E](#) [RE935-02R](#) [RE936-08](#)