



Wiha. Premium Tools
for Professionals.

Wiha T-Handle, Flag and Key Handle.

The Wiha T-handle, flag and key handle demonstrate their strengths whenever loosening particularly tight screws and fastening screws with high torque values.





Mature handle concepts enable the use of the complete handle geometry so that it is used as a lever, offering optimum axial power transmission from the hand to the screw.



The handle design is such that the complete handle surface can be used, thus enabling optimum power transmission.



NEW: Now with handle colour-coding system:

-  Red: metric hex blades
-  Yellow: inch hex blades
-  Green: TORX® blades
-  Light green: TORX PLUS® blades

Wiha T-Handle.

The ergonomic handle shape permits powerful torque transmission from handle to blade to screw.


The injection moulded T-handle with angled ends permits a good transmission of force from handle to blade. Since the blades are exposed to a high load, Wiha only uses high-quality chrome-vanadium steels, which, with their through-hardened blades, demonstrate high resistance to wear.

Wiha Flag and Key Handles.

Screwdrivers with these two special handle shapes are always used whenever replacing indexable inserts on milling heads or when carrying out high-torque adjustment work.

Thanks to the flag or key area below the shaft, it is possible to tighten or loosen screws comfortably with a delicate movement.

The cylindrical shaft of the handle is then used to quickly turn the screw in or out.

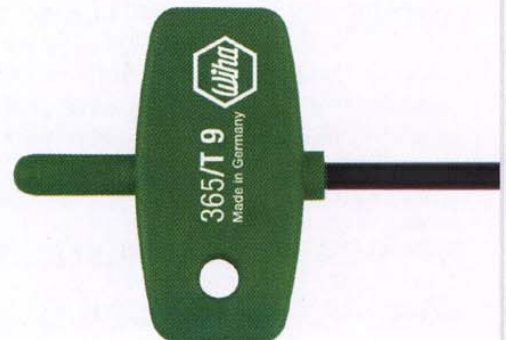



Wiha. Premium Tools
for Professionals.

Wiha T-Handle.

Hex and Square Nut Driver.



336 Hex nut driver with T-handle.

Blade: Chrome-vanadium steel, through hardened, nickel plated.
Handle: Wiha T-handle.
Application: For high torque transfer with low effort.
Extra: Recess in shank to accommodate for long screws.

| Order-No. | Ø | mm | mm | mm | mm | mm |
|-----------|-----|-----|-----|-----|----|----|
| 00965 6 | 5.5 | 125 | 157 | 100 | 32 | 10 |
| 00966 3 | 6 | 125 | 157 | 100 | 32 | 10 |
| 00967 0 | 6 | 200 | 232 | 100 | 32 | 10 |
| 00968 7 | 7 | 125 | 157 | 100 | 32 | 10 |
| 00969 4 | 7 | 200 | 232 | 100 | 32 | 10 |
| 00970 0 | 7 | 350 | 382 | 100 | 32 | 10 |
| 00971 7 | 8 | 125 | 157 | 100 | 32 | 10 |
| 00972 4 | 8 | 200 | 232 | 100 | 32 | 10 |
| 00973 1 | 8 | 350 | 382 | 100 | 32 | 10 |
| 00974 8 | 9 | 125 | 157 | 100 | 32 | 10 |
| 00975 5 | 9 | 200 | 232 | 100 | 32 | 10 |
| 00977 9 | 10 | 125 | 157 | 100 | 32 | 10 |
| 00978 6 | 10 | 200 | 232 | 100 | 32 | 10 |
| 00979 3 | 10 | 230 | 262 | 100 | 32 | 10 |
| 00980 9 | 10 | 350 | 382 | 100 | 32 | 10 |
| 00982 3 | 11 | 125 | 157 | 100 | 32 | 10 |
| 00983 0 | 11 | 230 | 262 | 100 | 32 | 5 |
| 00985 4 | 12 | 125 | 157 | 100 | 32 | 10 |
| 00986 1 | 12 | 230 | 262 | 100 | 32 | 5 |
| 00988 5 | 13 | 125 | 157 | 100 | 32 | 10 |
| 00989 2 | 13 | 230 | 262 | 100 | 32 | 10 |
| 00990 8 | 13 | 350 | 382 | 100 | 32 | 10 |
| 00991 5 | 14 | 125 | 157 | 100 | 32 | 5 |
| 00992 2 | 14 | 350 | 382 | 100 | 32 | 10 |
| 00993 9 | 15 | 125 | 157 | 100 | 32 | 5 |
| 00994 6 | 16 | 125 | 157 | 100 | 32 | 5 |
| 00995 3 | 17 | 125 | 157 | 100 | 32 | 5 |
| 00996 0 | 17 | 350 | 388 | 120 | 38 | 10 |



338 Square nut driver with T-handle.

Blade: Chrome-vanadium steel, through hardened, nickel plated.
Handle: Wiha T-handle.
Application: For high torque transfer with low effort.
Extra: Recess in shank to accommodate for long screws.

| Order-No. | Ø | mm | mm | mm | mm | mm |
|-----------|----|-----|-----|-----|----|----|
| 01005 8 | 6 | 125 | 157 | 100 | 32 | 10 |
| 01006 5 | 8 | 125 | 157 | 100 | 32 | 10 |
| 01007 2 | 10 | 125 | 157 | 100 | 32 | 10 |
| 01008 9 | 12 | 125 | 157 | 100 | 32 | 10 |


Hex and Nut Driver. Inch Sizes.



334 Inch Hex driver with T-handle.

Blade: Chrome-vanadium steel, through hardened, nickel plated.
Handle: Wiha T-handle.
Application: For high torque transfer with low effort.

| Order-No. | Ø | mm | mm | mm | mm | mm | |
|-------------|------|------|-----|-----|-----|----|----|
| 02802 2 -53 | 3/32 | 2.38 | 150 | 182 | 80 | 26 | 10 |
| 02803 9 -56 | 7/64 | 2.78 | 150 | 182 | 80 | 26 | 10 |
| 02804 6 -59 | 1/8 | 3.18 | 150 | 182 | 80 | 26 | 10 |
| 02805 3 -62 | 9/64 | 3.57 | 150 | 182 | 80 | 26 | 10 |
| 02806 0 -65 | 5/32 | 3.97 | 150 | 182 | 80 | 26 | 10 |
| 02807 7 -68 | 3/16 | 4.76 | 150 | 182 | 100 | 32 | 10 |
| 02808 4 -71 | 7/32 | 5.56 | 150 | 182 | 100 | 32 | 10 |
| 02809 1 -74 | 1/4 | 6.35 | 150 | 182 | 100 | 32 | 10 |
| 02810 7 -77 | 5/16 | 7.94 | 150 | 182 | 100 | 32 | 10 |
| 02811 4 -80 | 3/8 | 9.53 | 150 | 182 | 120 | 38 | 10 |

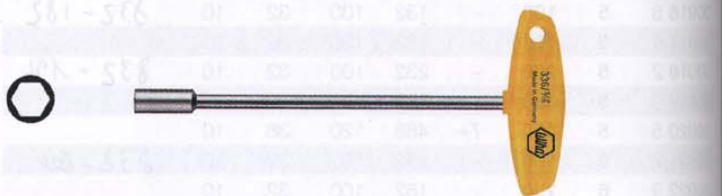

336 Inch Hex nut driver with T-handle.

Blade: Chrome-vanadium steel, through hardened, nickel plated.
Handle: Wiha T-handle.
Application: For high torque transfer with low effort.
Extra: Recess in shank to accommodate for long screws.

| Order-No. | Ø | mm | mm | mm | mm | mm | |
|-------------|------|-------|-----|-----|-----|----|----|
| 02819 0 -53 | 3/16 | 4.76 | 150 | 182 | 100 | 32 | 10 |
| 02820 6 -59 | 1/4 | 6.35 | 150 | 182 | 100 | 32 | 10 |
| 02821 3 -65 | 5/16 | 7.94 | 150 | 182 | 100 | 32 | 10 |
| 02822 0 -71 | 3/8 | 9.53 | 150 | 182 | 100 | 32 | 10 |
| 02823 7 -74 | 7/16 | 11.11 | 150 | 182 | 100 | 32 | 10 |
| 02824 4 -77 | 1/2 | 12.70 | 150 | 182 | 100 | 32 | 10 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Screwdrivers, Nut Drivers & Socket Drivers](#) category:

Click to view products by [Wiha](#) manufacturer:

Other Similar products are found below :

[1406504-2](#) [27850](#) [CE-16-03400-00-HNDLE-TORQ](#) [30246](#) [323451-000](#) [46722](#) [16538](#) [XW4Z-00B](#) [96025](#) [96030](#) [96560](#) [96703](#) [96430](#)
[31830](#) [92270](#) [96012](#) [96436](#) [96536](#) [92064](#) [92008](#) [72820](#) [92005](#) [76070](#) [96520](#) [92040](#) [36372](#) [96416](#) [92024](#) [96420](#) [76005](#) [96570](#) [72823](#)
[96325](#) [96525](#) [96720](#) [31832](#) [76019](#) [92004](#) [76007](#) [92069](#) [92020](#) [76021](#) [96523](#) [96510](#) [96427](#) [96425](#) [96415](#) [96320](#) [92073](#) [92052](#)