

# NPC-Series - Valve Regulated Lead Acid Battery


## NPC38-12I

# Data Sheet

SPECIFICATIONS		
Nominal voltage	12	V
20-hr rate Capacity to 10.5V at 20°C	38	Ah
10-hr rate Capacity to 10.8V at 20°C	33.44	Ah
DIMENSIONS		
Length	197 (±0.5)	mm
Width	165 (±0.5)	mm
Height	170 (±0.5)	mm
(height over terminals)	N/A	mm
Mass (typical)	14.0	kg
TERMINAL TYPE		
Female threaded terminal	M5	mm
Torque	2.5	Nm
OPERATING TEMPERATURE RANGE		
Storage	-20°C to +60°C	
Charge	-15°C to +50°C	
Discharge	-20°C to +60°C	
STORAGE		
Capacity loss per month at 20°C (approx)	3	%
CASE MATERIAL		
Standard Option	ABS (UL.94:HB)	
Flame retardant option (FR)	N/A	
CHARGE VOLTAGE		
Float charge voltage at 20°C	13.65 (±1%)	V
	2.275 (±1%)	V/cell
Float Charge voltage temperature correction factor (for variations from the standard 20°C)	-3	mV/cell/°C
Cyclic (or Boost) charge at 20°C	14.5 (±3%)	V
	2.42 (±3%)	V/cell
Cyclic Charge voltage temperature correction factor (for variations from the standard 20°C)	-4	mV/cell/°C
CHARGE CURRENT		
Float charge current limit	No limit	A
Cyclic (or Boost) charge current limit	9.50	A
MAXIMUM DISCHARGE CURRENT		
1 second	500	A
1 minute	380	A
SHORT-CIRCUIT CURRENT & INTERNAL RESISTANCE (according to EN IEC 60896-21)		
Internal resistance	N/A	mΩ
Short-Circuit current	N/A	A
CYCLIC LIFE DATA		
100% DOD down to 80% capacity	300	cycles
75% DOD down to 80% capacity	500	cycles
50% DOD down to 80% capacity	600	cycles
25% DOD down to 80% capacity	1400	cycles
IMPEDANCE		
Measured at 1 kHz	7.3	mΩ
PERFORMANCE & CHARACTERISTICS		
Refer to the technical manual	NPC	
DESIGN LIFE		
EUROBAT Classification: Standard Commercial	Cycle	3 to 5
Life data: e.g. 600 cycles at 50% DOD		years
SAFETY		
<b>Installation</b>	Can be installed and operated in any orientation except permanently inverted	
<b>Handles</b>	Batteries must not be suspended by their handles (where fitted)	
<b>Vent valves</b>	Each cell is fitted with a low pressure release valve to allow gasses to escape and then reseal.	
<b>Gas Release</b>	VRLA Batteries release hydrogen gas which can form explosive mixtures in air. Do not place inside a sealed container	
<b>Recycling</b>	YUASA's VRLA batteries must be recycled at the end of life in accordance with local and national laws and regulations	



### LAYOUT

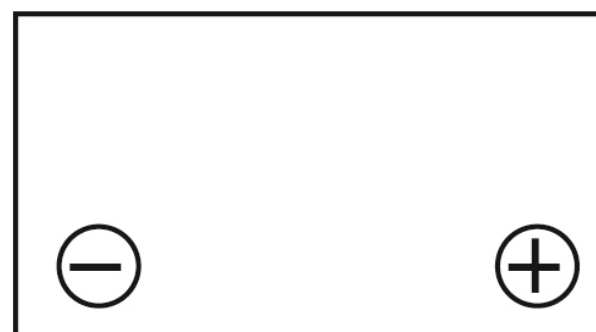

### 3RD PARTY CERTIFICATIONS

ISO 9001 - Quality Management Systems  
 ISO 14001 - Environmental Management Systems  
 EN 18001 - OHSAS Management Systems  
 ISO 9001 - Quality Management Systems



UNDERWRITERS LABORATORIES Inc.

### STANDARDS

IEC61056



ALL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE  
 Issue No.: V.1 / Issue Date: July 2010



## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Energysys](#) manufacturer:*

Other Similar products are found below :

[0820-0004](#) [0859-0020](#) [0860-0004](#) [2DH4-0LAP3](#) [3DH4-0LA4](#) [3DH4-0LAP3](#) [4DH4-0LA4](#) [4DH4-0LAP3](#) [5DH4-0T4](#) [DM55-12FR](#) [NP10-6](#)  
[NP10-6FR](#) [NP12-12](#) [NP12-12TFR](#) [NP1-6](#) [NP18-12BFR](#) [NP2.1-12](#) [NP2.8-6](#) [NP4.0-12](#) [NP4-6](#) [NP7-12T](#) [NP7-6](#) [NPC24-12](#) [NPX-25TGNV](#)  
[NPX-35TFR](#) [NPX-80BFR](#) [PC2150S](#) [SBS110](#) [SBS30](#) [SWL750](#) [Y0.8-12](#) [Y10-6](#) [Y12-12](#) [Y1.2-6](#) [Y12-6L](#) [Y17-12](#) [Y2.1-12](#) [Y2.8-12](#) [Y4-12](#)  
[Y4-6](#) [Y7-12](#)