


### Tri-Mode Dimming™ (0-10 V & TRIAC/ELV) Constant Current LED Drivers with Fast Startup Time

Input Voltage	Max. Output Power	Output Voltage	Output Current	Efficiency	Max. Case Temperature	THD	Power Factor	Dimming Method	Dimming Range	Startup Time
120 to 277 Vac nominal	120 W	30 to 84 Vdc	1.05 to 3.0 A CC	up to 87% typical	90°C (measured at the hot spot)	< 20%	> 0.9	Forward-Phase, Reverse-Phase & 0 - 10V	1 - 100% (% of Iout)	400 ms

CC: Constant Current

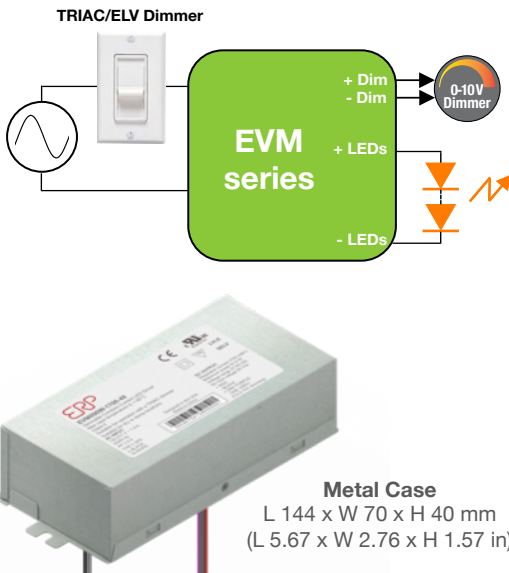

ERP Part Number	Nominal Input Voltage (Vac)	Iout (mA)	Max Output Power (W)	Output Voltage Range (Vdc)	
				Min	Max
<b>EVM060W: up to 60W</b>					
EVM060W-1400-42-C0B	120 - 277	1400	58.8	30	42
<b>EVM080W: up to 80W</b>					
EVM080W-1250-56	120 - 277	1250	70.0	40	56
EVM080W-1750-42	120 - 277	1750	73.5	30	42
EVM080W-1900-42	120 - 277	1900	79.8	30	42
<b>EVM090W: 81 to 90W</b>					
EVM090W-1050-84 <sup>[1]</sup>	120 - 277	1050	88.2	70	84
EVM090W-1700-48-N1B <sup>[2]</sup>	120 - 277	1700	81.6	37	48
EVM090W-2000-42	120 - 277	2000	84.0	30	42
<b>EVM100W: 91 to 100W</b>					
EVM100W-1200-80 <sup>[1]</sup>	120 - 277	1200	96.0	66	80
EVM100W-1200-84 <sup>[1]</sup>	120 - 277	1200	100.8	70	84
EVM100W-1700-56	120 - 277	1700	95.2	40	56
EVM100W-2100-45	120 - 277	2100	94.5	32	45
EVM100W-2350-42	120 - 277	2350	98.7	30	42
<b>EVM110W: 101 to 110W</b>					
EVM110W-2000-52-N1B <sup>[1][3]</sup>	120 - 277	2000	104.0	40	52
EVM110W-2500-42 <sup>[1]</sup>	120 - 277	2500	105.0	30	42
<b>EVM120W: 111 to 120W</b>					
EVM120W-1400-84	120 - 277	1400	117.6	70	84
EVM120W-2700-42 <sup>[1]</sup>	120 - 277	2700	113.4	30	42
EVM120W-3000-40 <sup>[1]</sup>	120 - 277	3000	120.0	30	40

Notes:

- Not class 2.
- The EVM090W-1700-48-N1B is specifically intended to drive the Cree LMH2 6000 module and exhibits a customized 0-10V dimming transfer function.
- The EVM110W-2000-52-N1B is specifically intended to drive the Cree LMH2 8000 module and exhibits a customized 0-10V dimming transfer function.
- For additional options of output current and output voltage, contact your sales representative or send an email to: [SaveEnergy@erp-power.com](mailto:SaveEnergy@erp-power.com)

#### FEATURES

- Compatible with TRIAC (forward-phase or leading-edge), ELV (reverse-phase or trailing-edge) and 0-10 V dimmers
- TRIAC and ELV dimming only at 120 Vac
- Outdoor surge protection: 3 kV line to line/6 kV line to earth
- Linear 0-10V dimming transfer function: 10V=100%, 1V=10%, 0.1V=1%
- Protections: output open load, over-current and short-circuit (hiccup), and over-temperature with auto recovery
- Conducted and radiated EMI: Compliant with FCC CFR Title 47 Part 15 Class B (120 Vac)/Class A (277 Vac) and EN55015 (CISPR 15) at 220/230/240 Vac
- Complies with ENERGY STAR® luminaire specification and DLC (DesignLight Consortium®) technical requirements
- IP20-rated Bottom Leads with Studs metal case with silicone-based potting. Optional IP64 metal case with side leads.
- Lifetime: 50,000 hours min at 70°C case temperature
- 90°C maximum case hot spot temperature
- Class 2 power supply (only some models)

#### APPLICATIONS

- Suitable for driving high current COB LEDs such as Cree's CXA3050/3070/3590, Bridgelux' Vero series and modules such as Cree's LMH2 6000/8000
- High Bay Lights
- Metal Halide replacement
- Outdoor LED Lighting
- Industrial LED Lighting
- Tunnels and street lighting
- Wide-area downlights



**CHINA Operations**  
tel: +86-756-6266298  
No. 8 Pingdong Road 2  
Zhuhai, Guangdong, China 519060

[www.erp-power.com](http://www.erp-power.com)

[SaveEnergy@erp-power.com](mailto:SaveEnergy@erp-power.com)

**USA Headquarters**  
tel: +1-805-517-1300  
893 Patriot Drive, Suite E  
Moorpark, CA 93021, USA

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [LED Power Supplies](#) category:*

*Click to view products by [ERP Power](#) manufacturer:*

Other Similar products are found below :

[ESS015W-1000-12](#) [PDA-WIFI](#) [PIFC-K250F](#) [PITB-K222A](#) [ALD-514012PJ134](#) [LB240S24KH](#) [LMH020-SPLC-0000-0000001](#) [79534](#) [79535](#)  
[EUG-200S210DT](#) [ESS030W-1050-21](#) [ESS030W-0900-32](#) [BPOXL 4-12-035](#) [ESS010W-0350-24](#) [ESS010W-0200-42](#) [ESM060W-1400-42](#)  
[PDA080B-1A0G](#) [ESS010W-0500-12](#) [PDA150B-S1A5G](#) [SLM140W-1.05-130-ZA](#) [ESS015W-0700-18](#) [EUD-150S350DVA](#) [LWA320-C420-](#)  
[ARK-B](#) [HVG-240-48AB](#) [HVG-320-36AB](#) [HVG-320-54AB](#) [ELG-240-C1400AB](#) [EUK-150S105DV](#) [BXCS-12Z-N2P-B1-A](#) [BXPR-WN-01-A](#)  
[LN1224CV](#) [BXCS-12D-N2P-01-A](#) [BXCS-12W-N2P-01-A](#) [HBG-160-24AB](#) [980100001200394](#) [980060001200376](#) [LC 14W 250-350MA](#)  
[FLEXC R ADV2](#) [LC 24W 500-600MA FLEXC R ADV2](#) [LC 36W 850-900MA FLEXC R ADV2](#) [LC 50W 200-350ML 170V FLEXC LP](#)  
[SNC4](#) [LC 25W 200-350ML 70V FLEXC LP SNC4](#) [LC 35W 200-350ML 121V FLEXC LP SNC4](#) [LCBI 10W 350MA PHASE-CUT/1-10V LP](#)  
[LC 13W 300MA FIXC C SNC](#) [LC 10W 250MA FIXC SC SNC2](#) [LC 35W 800MA FIXC SR ADV2](#) [LC 38W 900MA FIXC SR ADV2](#) [LC](#)  
[34W 800MA FIXC SC ADV2](#) [LC 44W 1050MA FIXC SC ADV2](#) [LC 38W 900MA 42V FIXC SRL ADV2](#)