


Part No.	"A"	"B"
RLEHCBS-5-01BK	.38 [9.5]	.06 [1.5]
RLEHCBS-6-01BK	.44 [11.1]	
RLEHCBS-7-01BK	.50 [12.7]	.08 [2.1]
RLEHCBS-8-01BK	.56 [14.3]	

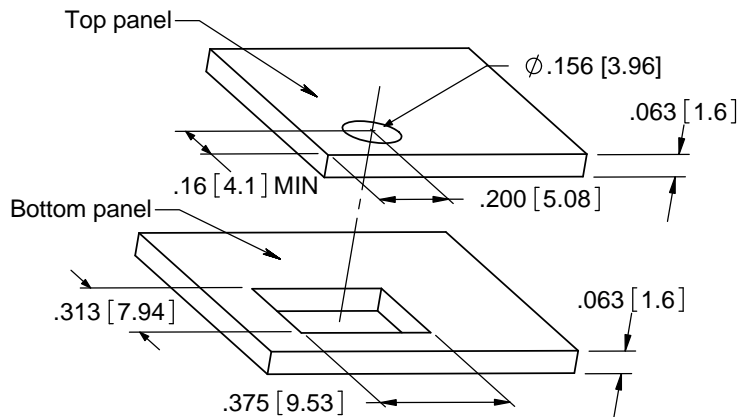

- NOTES:
- Material: Nylon 6/6 (RMS-01).  
Flame Retardant Nylon, (RMS-19) available by special order.  
To order, replace -01 with -19.
  - Color: Black. Natural, also available by special order.  
To order, remove BK from part no.
  - Designed to snap lock into the bottom of a .313 X .375 [7.94 X 9.53] hole, and top panel with Ø.156 [3.96] hole .200 [5.08] from edge.
  - Board clearance is dependent on bottom panel thickness.

TITLE: REVERSE LOCKING EDGE HOLDING CIRCUIT BOARD SUPPORT				DWG IN IN[mm]			
CREATED USING SOLIDWORKS	FILE #: RLEHCBS	DWN: D.J.Z.	APP: DJZ	FINAL			
TOLERANCES UNLESS NOTED	SHEET: 1 OF 1	SHEET SIZE: A	DT: 06/19/03	CHKD: SJ	PART #		PRINT TYPE
.XX=±.010 .XXX=±.005 FRAC.=±1/64 ANG.=±1°	RE: RICHCO	RICHCO, INC. ENG@RICHCO-INC.COM (773) 539-4060		SEE TABLE		CA	
D	SEE ECN #1256 FOR CHANGES	SK	11/30/06				
C	SEE ECN #875 FOR CHANGES	SM	11/01/04				
B	ADDED DIMENSIONS, SEE ECN #786 FOR CHANGES	SM	04/30/04				
A	RELEASE FOR PRODUCTION	SM	08/26/03				
REV.	DESCRIPTION	ENGR.	DATE				

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Circuit Board Hardware - PCB category](#):*

*Click to view products by [ESSENTRA manufacturer](#):*

Other Similar products are found below :

[8919-0-00-15-00-00-03-0](#) [0135-0-15-01-30-27-04-0](#) [5970-1-15-01-32-14-04-0](#) [0149-0-15-15-30-27-04-0](#) [7305-0-15-15-47-14-10-0](#) [MLN](#)  
[150/1 BLACK](#) [8579-0-15-80-11-27-10-0](#) [8579-1-15-15-11-27-10-0](#) [8830-0-15-01-22-14-10-0](#) [8836-0-00-21-00-00-03-0](#) [PRUEF 1 RED](#)  
[PRUEF 2 RED](#) [9976-0-00-00-00-00-03-0](#) [PW1616](#) [1215-3-05-00-00-00-01-0](#) [1231](#) [1303-0-15-15-47-14-04-0](#) [1404-3](#) [1404-4](#) [1406-4](#) [1407-3](#)  
[1407-4](#) [1408-3](#) [1424-4](#) [1427-3](#) [1419-4](#) [1426-4](#) [MPS 1 BLACK](#) [1548-103](#) [1938-0-00-00-00-00-03-0](#) [1942-0-00-00-00-00-03-0](#) [2101-3-](#)  
[00-44-00-00-07-0](#) [2108-2-00-50-00-00-07-0](#) [2109-2-00-44-00-00-07-0](#) [2110-2-00-44-00-00-07-0](#) [2111-2-00-00-00-00-07-0](#) [2113-4-00-44-00-](#)  
[00-07-0](#) [2301-3-00-44-00-00-07-0](#) [2308-1-00-50-00-00-07-0](#) [2313-2-00-00-00-00-07-0](#) [2315-2-01-44-00-00-07-0](#) [2317-2-00-50-00-00-07-0](#)  
[2333-1-00-50-00-00-07-0](#) [9000-0-00-00-00-00-03-0](#) [2506-2-00-50-00-00-07-0](#) [2507-2-01-44-00-00-07-0](#) [2508-2-00-44-00-00-07-0](#) [2561-2-](#)  
[00-44-00-00-07-0](#) [9220](#) [9234-0-15-15-30-14-10-0](#)