



# CC4V-T1A

## Tuning Fork Crystal 30 kHz – 1.0 MHz




**100% leadfree, RoHS - compliant**


**Miniature SMT ceramic package**  
**Package height 1.25 mm**  
**SMD-package in Tape and Reel**  
**Ind. and Ext. temperature ranges**  
**High stability**  
**Low aging**  
**Low power consumption**  
**High shock and vibration resistance**

### DIMENSIONS

#### Package:

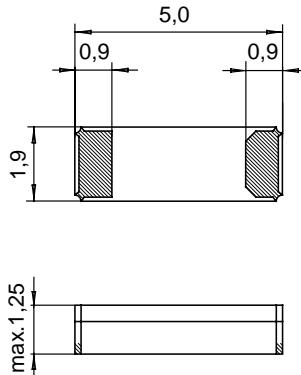

#### Recommended Solder Pad:

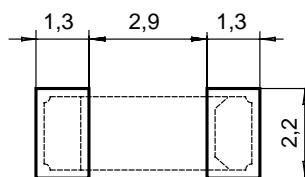

All dimensions in mm typical

### DESCRIPTION:

This SMD ceramic package has been specially designed for miniature industrial, telecom and medical applications. The crystals are supplied in special trays (100 crystals per tray). For pick-and-place equipment, the parts are available in 12 mm tape:  
 7" (178 mm) reel with 2'000 crystals  
 13" (330 mm) reel with 10'000 crystals

### ELECTRICAL CHARACTERISTICS AT 25°C:

Frequency Range	F <sub>L</sub>	30–200	201–560	1'000	kHz
Load capacitance <sup>1)</sup>	C <sub>L</sub>	9.0 / 12.5	4.0	10.0	pF
Frequency tolerance <sup>2)</sup>	ΔF/F	+/-30	+/-100	+/-100	ppm
	ΔF/F	+/-100	+/-250	+/-500	ppm
Drive level max.	P		1.0		μW
Insulation resistance min.	R <sub>i</sub>		500		MΩ
Aging first year max.	ΔF/F		+/-3		ppm

Frequency Example <sup>3)</sup>	F <sub>L</sub>	32.768	307.200	1'000	kHz
Series resistance typ./max.	R <sub>s</sub>	50 / 65	3.5 / 5.0	0.5 / 1.2	kΩ
Motional capacitance typ.	C <sub>1</sub>	2.1	1.1	1.1	fF
Static capacitance typ.	C <sub>0</sub>	1.2	1.2	1.0	pF
Turnover temperature	T <sub>0</sub>	25 +/-5	33 +/-5	39 +/-5	°C
Frequency vs. temperature	ΔF/F <sub>0</sub>	-0.035 ppm/°C <sup>2</sup>	(T - T <sub>0</sub> ) <sup>2</sup>	+/-10%	ppm

1) Other load capacitances on request.

2) Tighter and wider frequency tolerances on request.

3) Values for other frequencies consult factory.

**STANDARD FREQUENCIES:**


Frequency kHz					Frequency MHz
32.000	32.768	36.409	38.400	40.000	1.000
60.000	75.000	76.800	100.000	128.000	1.008
153.600	240.000	307.200			
Other frequencies between 30 kHz and 1.008 MHz on request					

**ENVIRONMENTAL  
CHARACTERISTICS:**

		Conditions	Max. Dev.
Storage temp. range		-55 to +125°C	
Industrial operating temp. range		-40 to +85°C	
Extended operating temp. range		-55 to +125°C	
Shock resistance	ΔF/F	5000 g, 0.3 ms, ½ sine	+/- 5 ppm
Vibration resistance	ΔF/F	20 g / 10–2000 Hz	+/- 5 ppm

**TERMINATIONS AND  
PROCESSING:**

Type	Termination	Processing
CC4V-T1A	For SMD mounting Au flashed pads	Reflow soldering 260°C / 20 s max.

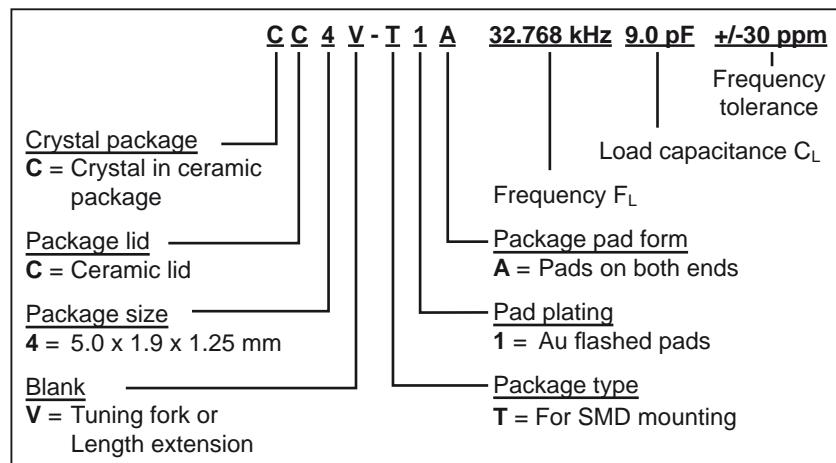**PART NUMBER/  
ORDERING INFORMATION  
EXAMPLE:**


All specifications subject to change without notice. 03.07



# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for micro crystal manufacturer:***

Other Similar products are found below :

[RV-8523-C3-EVALUATION-BOARD](#) [RV-3028-C7 ON BOARD 32.768kHz TA QC](#) [RV-3049-C2-EVALUATION-BOARD-OPTION-B](#) [RV-3029-C2-EVALUATION-BOARD-OPTION-B](#) [RV-8803-C7-EVALUATION-BOARD](#) [OV-7604-C7-EVALUATION-BOARD](#) [RV-8263-C7-EVALUATION-BOARD](#) [CM7V-T1A-32.768kHz-9pF-20PPM-TC-QC](#) [RV-2251-C3-EVALUATION-BOARD](#) [RV-3029-C3-32.768k-OPTION-B-TB-QA](#) [RV-3029-C3-TB-QA-OPT.B](#) [CC4V-T1A-32.768kHz-9pF-20PPM-TA-QC](#) [RV-2123-C2-TA-QC-020](#) [CC4V-T1A 32.768KHZ +-20PPM 9PF](#) [MS1V-T1K-32.768kHz-7pF-20PPM-TA-QC-Au](#) [CC7V-T1A-32.768k-12.5pF-20PPM-TA-QA](#) [CC4V-T1A 32.768KHZ 12.5PF +-20PPM](#) [CM7V-T1A-32.768k-6pF-20PPM-TB-QA](#) [RV-3029-C2-TB-QA-OPT.A](#) [OM-0100-C8-100.00kHz-20PPM-TA-QC](#) [CM7V-T1A-32.768k-9pF-20PPM-TA-QA](#) [RV-8803-C7-32.768k-3PPM-TA-QA](#) [CM8V-T1A-32.768kHz-7pF-20PPM-TB-QC](#) [RV-3049-C3-TB-QA-OPT.A](#) [CC5V-T1A 32.768KHZ +-20PPM 9PF](#) [RV-8564-C3-TA-QC-020](#) [MS1V-T1K 32.768KHZ +-20PPM 10PF](#) [CM7V-T1A-32.768kHz-12.5pF-100PPM-TC-QC](#) [RV-3029-C3-32.768k-OPTION-A-TB-QA](#) [CC7V-T1A-32.768k-9pF-20PPM-TC-QA](#) [CM7V-T1A-32.768k-9pF-20PPM-TC-QA](#) [CC7V-T1A-32.768kHz-7pF-20PPM-TB-QC](#) [CM7V-T1A-100.000kHz-9pF-100PPM-TA-QC](#) [RV-4162-C7-TA-QC-020](#) [CC7V-T1A-32.768k-9pF-20PPM-TA-QA](#) [RV-3029-C2-32.768k-OPTION-A-TB-QA](#) [RV-3049-C3-32.768kHz-OPTION-B-TA-QC](#) [RV-8564-C2-32.768kHz-20PPM-TA-QC](#) [CC7V-T1A-32.768kHz-7pF-10PPM-TA-QC](#) [CM7V-T1A-32.768k-9pF-20PPM-TB-QA](#) [OM-7605-C8-20PPM-TA-QA](#) [CC7V-T1A-32.768k-12.5pF-20PPM-TB-QA](#) [CC7V-T1A-32.768kHz-12.5pF-10PPM-TA-QC](#) [OV-7604-C7](#) [RV-3149-C3-32.768kHz OPTION B TA QC](#) [RV-3049-C3-32.768k-OPTION-B-TB-QA](#) [CC4V-T1A-32.768kHz-7pF-20PPM-TA-QC](#) [CM9V-T1A-32.768kHz-7pF-100PPM-TA-QC](#) [CM7V-T1A-32.768k-7pF-100PPM-TB-QA](#) [CM7V-T1A-0.3-32.768kHz-9pF-20PPM-TA-QC](#)