


User Manual

EXTECH[®]
INSTRUMENTS
A FLIR COMPANY

Oscilloscope Probe

MODEL TL620

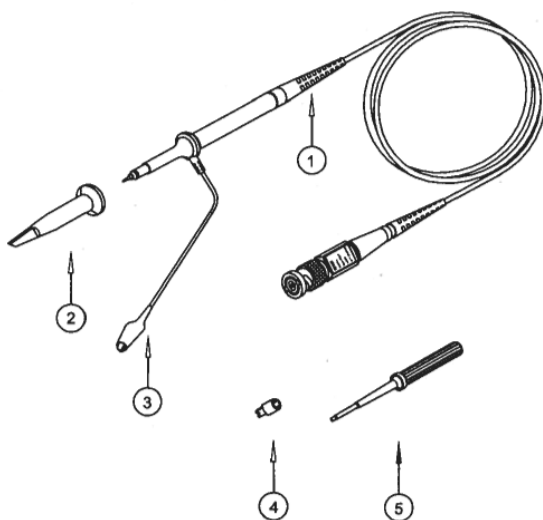


1. Probe Rod
2. Probe Tip
3. Ground Lead
4. Tip Locating Sleeve
5. Adjustment Tool

Specifications

Attenuation	X1, X10
Input Resistance	X1: $1\text{M}\Omega\pm 2\%$, X10: $10\text{M}\Omega\pm 2\%$
Input Capacitance	X1: 85pF to 115pF, X10: 18.5pF to 22.5pF
Compensation Range	15pF to 40pF
Bandwidth	X1: DC to 6MHz, X10: DC to 60MHz/100MHz/200MHz
Maximum Input Voltage	X1: <200VDC + Peak AC X10: <600VDC + Peak AC
Cable Length	120cm (47")
Weight	55g (0.15lb)
Operating Temperature	-10°C to 50°C (14F to 122°F)
Storage Temperature	-20°C to 75°C (-4F to 167°F)
Humidity	<85% RH

Low Frequency Probe Compensation

Before taking any measurements using the probe, first check the compensation and adjust it to match the channel inputs. Most oscilloscopes have a square wave reference signal available at a terminal on the front panel used to compensate the probe. Connect the probe to the signal source to display a 1kHz test signal on the oscilloscope. Adjust the trimmer "L" until the signal displays a flat-top square wave.

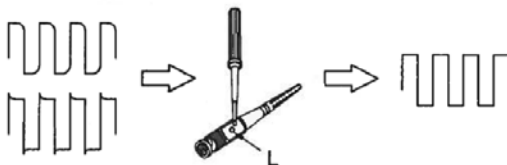

Copyright © 2012 FLIR Systems, Inc.

All rights reserved including the right of reproduction in whole or in part in any form

www.extech.com

ISO-9001 Certified

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Test Probes](#) category:

Click to view products by [Extech](#) manufacturer:

Other Similar products are found below :

[6214](#) [6265](#) [6474](#) [815003](#) [923832-BK-B](#) [R941850000](#) [923837-YL-B](#) [925250-R](#) [72923-2](#) [923848-C](#) [973368101](#) [972318101](#) [972318100](#)
[MXHQ87WJ3000](#) [66.9115-23](#) [850182](#) [TAS90](#) [VL1735/45](#) [973368100](#) [972327100](#) [972327101](#) [975017700](#) [975018700](#) [973995100](#)
[973995101](#) [100039-080-958](#) [CT3986B-120](#) [CT3987B-120](#) [CT3983B-120](#) [CT3979B-150](#) [CT3981B-120](#) [CT3985B-120](#) [402-IEC-RT](#) [402-](#)
[IEC-SW](#) [404-IEC-RT](#) [AX-CP-01-SET](#) [AX-CP-05-B](#) [AX-CP-05-R](#) [464-IEC-NEEDLE13/0,6-RT](#) [464-IEC-NEEDLE13/0,6-SW](#) [464-IEC-RT](#)
[464-IEC-SW](#) [00043](#) [404-IEC-SW](#) [00125](#) [1445](#) [MPS1RT](#) [0602 4592](#) [0602 0645](#) [0602 4892](#)