

150 Watts

VEH Series



- Energy Efficiency Level V
- CEC 2008 / EISA 2007 / ErP Compliant
- No Load Input Power <0.35 W
- 5000 m Operating Altitude
- Single Outputs from 12 V to 24 V
- Low Cost
- 3 Year Warranty

Specification

Input

Input Voltage	• 90-264 VAC, see note 1
Input Frequency	• 47-63 Hz
Input Current	• 2.0 A max at 90 VAC
Inrush Current	• 150 A max at 230 VAC, cold start at 25 °C
Earth Leakage Current	• <500 µA at 230 VAC/50 Hz
Power Factor	• >0.95 at 230 VAC and full load
No Load Input Power	• <0.35 W
Input Protection	• Internal T4.0A/250 V fuse in line

Output

Output Voltage	• See table
Initial Set Accuracy	• ±5% at 50% load
Minimum Load	• No minimum load requirement
Hold Up Time	• 8 ms typical at 115 VAC, full load
Start Up Delay	• 3 s max
Start Up Rise Time	• 60 ms max
Overshoot	• 3% max
Transient Response	• 4% maximum deviation, recovering to less than 1% within 500 µs for a 50% step load change
Line Regulation	• ±0.5% max
Load Regulation	• 3% max
Ripple & Noise	• 1.5% for 12 V, 1% for 19/24 V pk-pk max, 20 MHz bandwidth (see note 2)
Overvoltage Protection	• See table
Overload Protection	• 105-150%
Short Circuit Protection	• Continuous (hiccup/trip & restart mode with auto recovery)
Temperature Coefficient	• ±0.04%/°C

General

Efficiency	• See table
Energy Efficiency	• Level V
Isolation	• 3000 VAC Input to Output, 1500 VAC Input to Ground Negative output is connected to Ground
Switching Frequency	• PFC: 38-380 kHz, PWM: 47-70 kHz
Power Density	• 4.5 W/in ³
MTBF	• >145 kHrs to MIL STD 217F at 25 °C GB

Environmental

Operating Temperature	• 0 °C to +60 °C derate linearly from 100% load at +40 °C to 50% load at +60 °C,
Storage Temperature	• -20 °C to +85 °C
Operating Humidity	• 5% to 90% RH non-condensing
Shock	• 6 Random drops from 0.7 m with no damage, 50 g for 20 ms in each of 3 axes
Operating Altitude	• 5000 m
Vibration	• Operating: 10-250 Hz, 1/4 g pk-pk, 3 axes, 15 min sweep Non Operating: 10-300 Hz, 2 g pk-pk, 3 axes, 15 min sweep
Storage Humidity	• 5% to 95% RH non-condensing

EMC & Safety

Emissions	• EN55022, level B conducted & radiated
Harmonic Currents	• EN61000-3-2 class A, EN61000-3-2 class C >60% load
Voltage Flicker	• EN61000-3-3
ESD Immunity	• EN61000-4-2, level 3 Perf Criteria A
Radiated Immunity	• EN61000-4-3, 3 V/m Perf Criteria A
EFT/Burst	• EN61000-4-4, level 2 Perf Criteria A
Surge	• EN61000-4-5, installation class 3, Perf Criteria A
Conducted Immunity	• EN61000-4-6, level 2 Perf Criteria A
Magnetic Field	• EN61000-4-8, 3 A/m Perf Criteria A
Dips & Interruptions	• EN55024, 100% 10 ms, 30% 500 ms, 100% 5000 ms, Perf Criteria A, A, B
Safety Approvals	• EN60950-1, UL/cUL60950-1


Models and Ratings

Output Power	Output Voltage	Output Current	OVP Setting ³⁾	Effeciency ⁴⁾	Model Number
150 W	12.0 V	12.50 A	20.0 V	91%	VEH150PS12
150 W	19.0 V	7.90 A	27.0 V	91%	VEH150PS19
150 W	24.0 V	6.25 A	34.0 V	91%	VEH150PS24

Notes

- 12 V version output derates linearly from 150 W at 100 VAC to 135 W at 90 VAC.
- Measured at the output connector with a 0.1 μ F ceramic capacitor and a 10 μ F electrolytic capacitor at room temperature.
- Typical values.
- Average of efficiencies measured at 25%, 50%, 75% and 100% load and 230 VAC input.

Mechanical Details

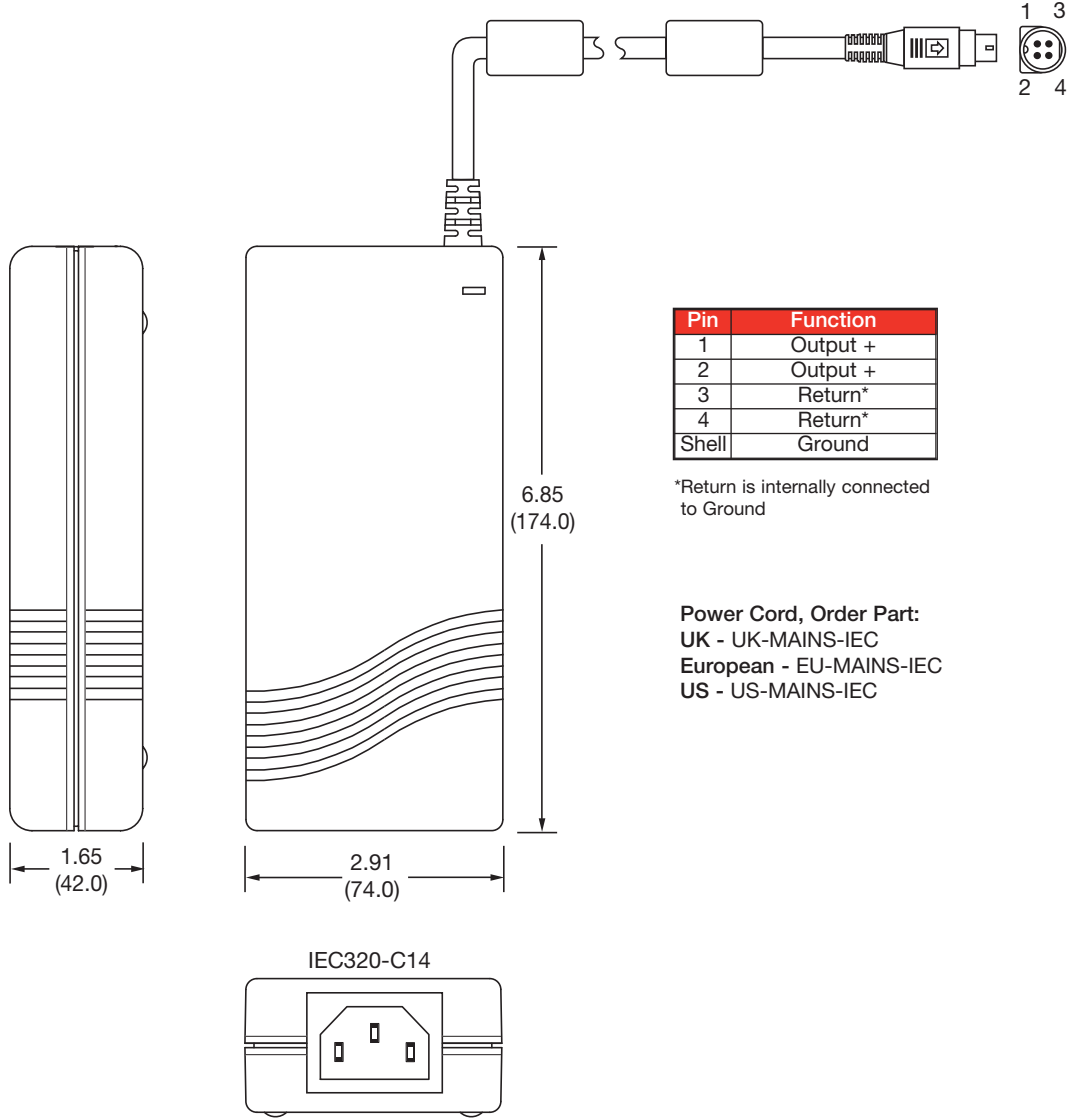

Notes

- All dimensions shown in inches (mm). Tolerance is 0.04 (1.0) maximum, except output cable length.
- Weight 1.57 lbs (710 g) approx.
- Cable length is 47.2" \pm 0.8" (1200 \pm 20 mm) approx.
- Output connector (Power Mini Din) mates with Kycon KPJ-4S or equivalent.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [xp power manufacturer](#):

Other Similar products are found below :

[FCM400PS12](#) [HDS1500PS48](#) [ASB110PS28](#) [ECE40US24-SD](#) [ECE40US48](#) [ECE60US48-S](#) [ECL15UD02-T](#) [ECM40UT33](#) [ECM60US48](#)
[EMH250PS12](#) [EML15US24-E](#) [EML30US03-S](#) [IA0524D](#) [ISW0505A](#) [ITV2405SA](#) [JCA0205S05](#) [JCA0248S05](#) [JCD0412D05](#) [JCK3012S05](#)
[IA2424S](#) [IE1205SH](#) [JCA0305S15](#) [JCG1212S05](#) [JCK6048S12](#) [JTE0624D24](#) [JTL6048S12](#) [JTK3024S15](#) [JTC0648D03](#) [JTC0624S05](#)
[JHL0624S05](#) [ACS40-60](#) [LOOM](#) [JCP4024T0515](#) [JCM3024S12](#) [JCM3012S12](#) [JCK3048S05](#) [RCQ50110S15](#) [JCD0612S05](#) [IF0503S](#)
[IEQ0524S3V3](#) [IEU0312D05](#) [IEQ0548S24](#) [VER36US120-JA](#) [VER18US150-JA](#) [AH20N-12](#) [ECM40/60S](#) [LOOM](#) [MTC3528S12](#) [TR05S15](#)
[ECL15](#) [DIN CLIP](#) [A20N-5](#) [A12N-5](#)