


P-CHANNEL LATERAL POWER MOSFET FOR AUDIO

ALF08P16V/ALF08P20V

- Designed specifically for linear audio amplifier applications
- High-speed for high bandwidth amplifiers
- High voltage rating – 160V & 200V
- TO-247 plastic package
- Enhanced oscillation suppression in multi-device applications
- Complimentary N-channel available – ALF08N16V/ALF08N20V

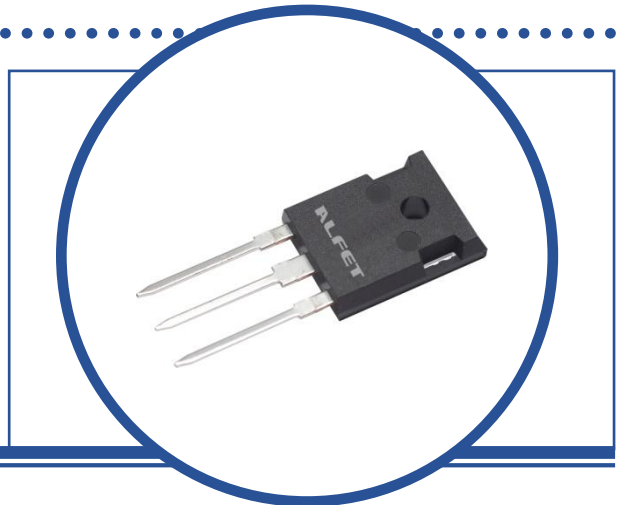


ABSOLUTE MAXIMUM RATINGS

($T_C = 25^\circ\text{C}$ unless otherwise stated)

		ALF08P16V	ALF08P20V
V_{DSS}	Drain – Source Voltage	-160V	-200V
V_{GSS}	Gate – Source Voltage	$\pm 20\text{V}$	
I_D	Continuous Drain Current	-8A	
I_{DR}	Body Drain Diode Current	-8A	
P_D	Allowable Power Dissipation $T_{case} = 25^\circ\text{C}$	125W	
T_{ch}	Channel Temperature	150°C	
T_{stg}	Storage Temperature Range	-55 to +150°C	

THERMAL PROPERTIES

Symbols	Parameters	Min.	Typ.	Max.	Units
$R_{\theta JC}$	Thermal Resistance, Junction To Case			1	$^\circ\text{C/W}$

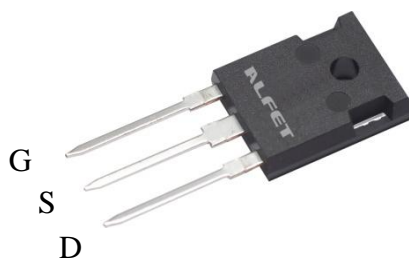

Magnatec reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Magnatec is believed to be both accurate and reliable at the time of going to press. However Magnatec assumes no responsibility for any errors or omissions discovered in its use. Magnatec encourages customers to verify that datasheets are current before placing orders.

Magnatec

Coventry Road, Lutterworth, Leicestershire, LE17 4JB
 Telephone +44 (0) 1455 554711
 Fax +44 (0) 1455 558843

Email: sales@semelab-tt.com

Website: <http://www.semelab-tt.com>



A subsidiary of
TT electronics plc.

Document Number
8411
Issue 2
Page 1 of 1

ALF08P16V/ALF08P20V


ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise stated)

Symbols	Parameters	Test Conditions	Min.	Typ	Max.	Units
BV_{DSX}	Drain-Source Breakdown Voltage	$V_{GS} = 10\text{V}$	ALF08P16V	-160		V
		$I_D = -10\text{mA}$	ALF08P20V	-200		
I_{GSS}	Gate-Source Leakage Current	$V_{DS} = 0$ $V_{GS} = \pm 20\text{V}$			100	μA
$V_{GS(\text{off})}$	Gate-Source Cut-off Voltage	$V_{DS} = -10\text{V}$ $I_D = -100\text{mA}$	-0.15		-1.5	V
$V_{DS(\text{sat})}^*$	Drain-Source Saturation Voltage	$V_{GD} = 0$ $I_D = -8\text{A}$			-12	V
$ y_{fs} ^*$	Forward Transfer Admittance	$V_{DS} = -10\text{V}$ $I_{DS} = -3\text{A}$	0.7		2	S(Ω)
I_{DSX}	Drain-Source Cut-Off Current	$V_{GS} = -10\text{V}$	$V_{DS} = -160\text{V}$		-10	mA
			$V_{DS} = -200\text{V}$		-10	

* Pulse Test: Pulse Width = 300 μs , Duty Cycle $\leq 2\%$







DYNAMIC CHARACTERISTICS

C_{iss}	Input Capacitance	$V_{GS} = 0$		700		pF
C_{oss}	Output Capacitance	$V_{DS} = -10\text{V}$		300		
C_{rss}	Reverse Transfer Capacitance	$f = 1.0\text{MHz}$		25		
t_{on}	Turn-On Time	$V_{DS} = -20\text{V}$		120		ns
t_{off}	Turn-Off Time	$I_D = -5\text{A}$		60		





Please Note: These lateral mosfets do not include a G-S protection network and care must therefore be taken with static handling precautions and the appropriate protection in the amplifier circuit. Please refer to the application notes for more information.

GENERAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise stated)

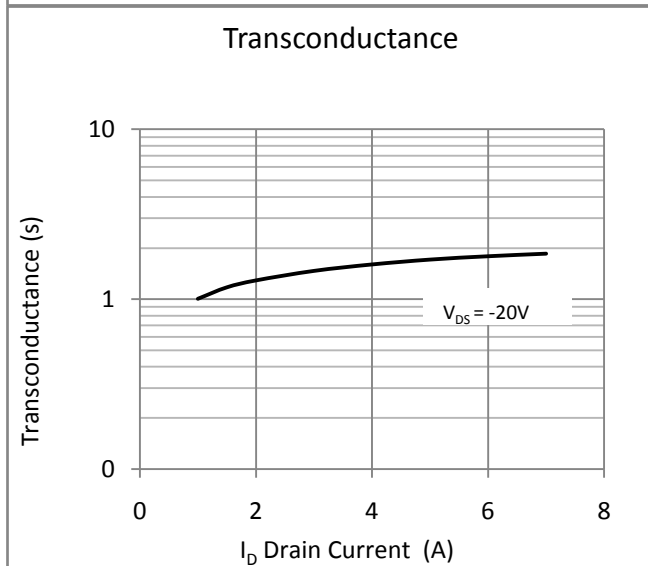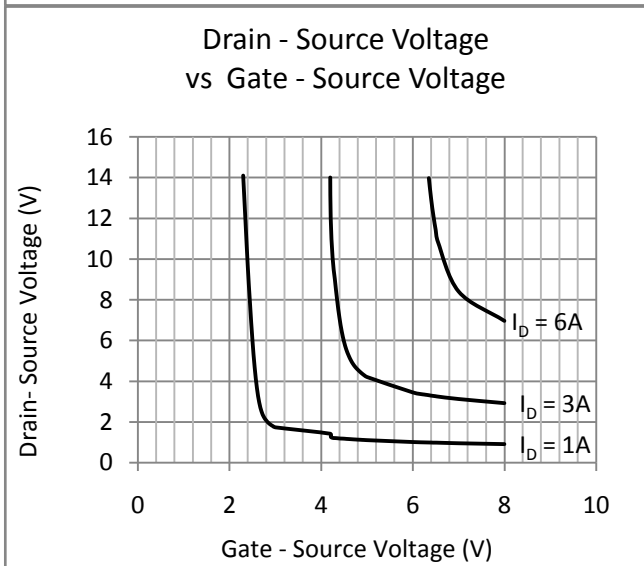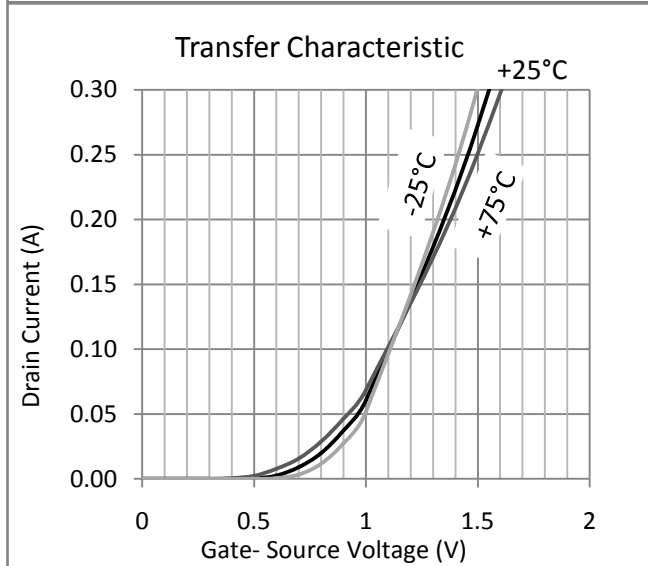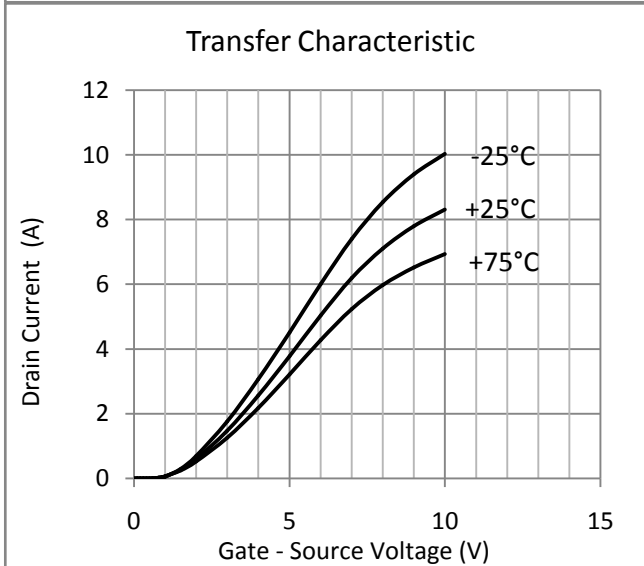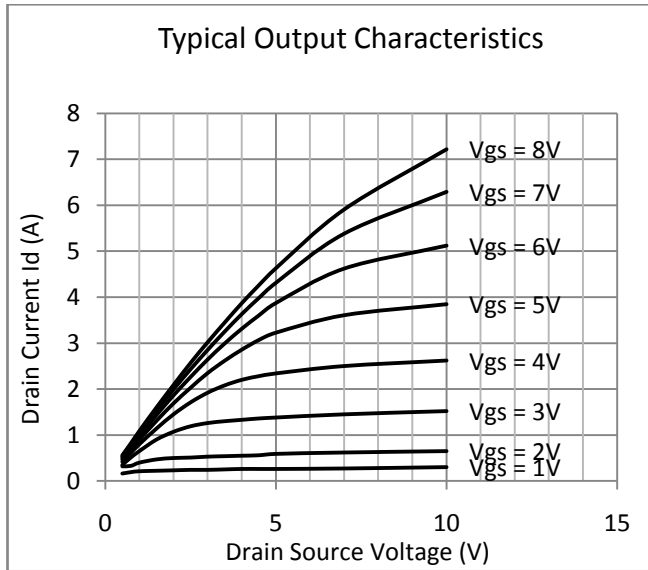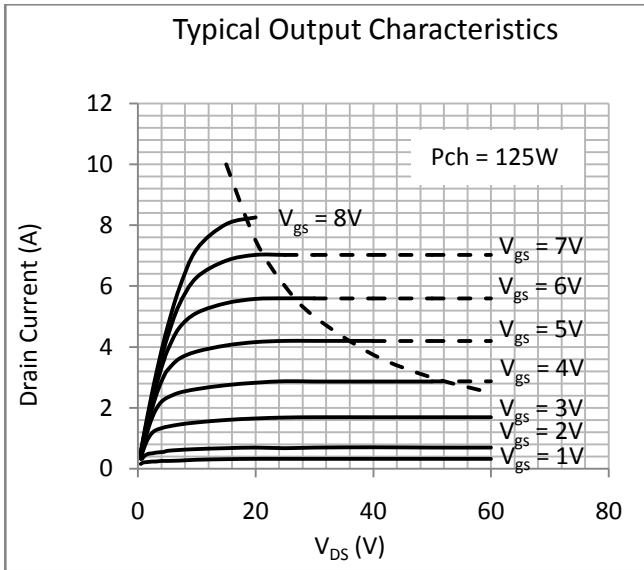


GENERAL CHARACTERISTICS CONTINUED ($T_C = 25^\circ\text{C}$ unless otherwise stated)

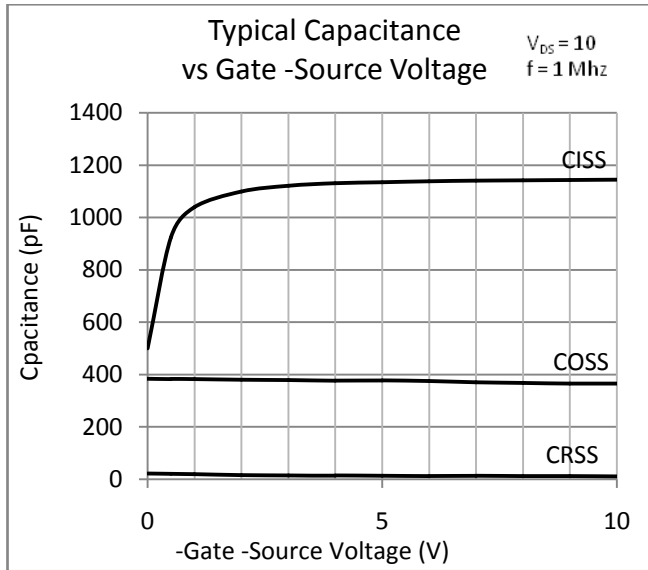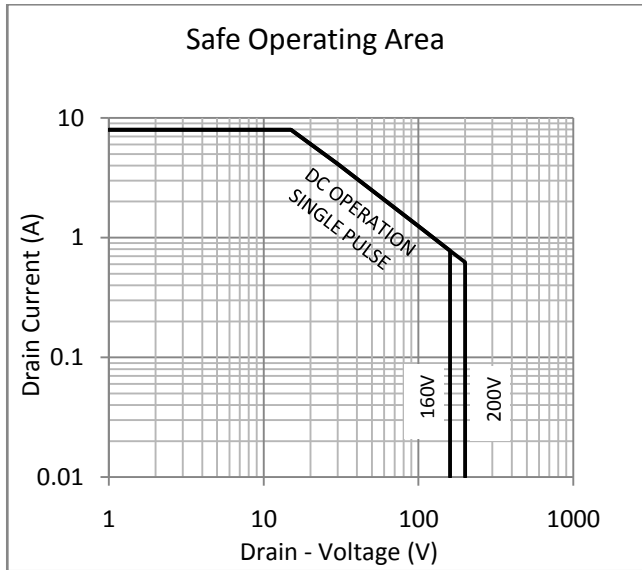

MECHANICAL DATA

Dimensions in mm (Inches)

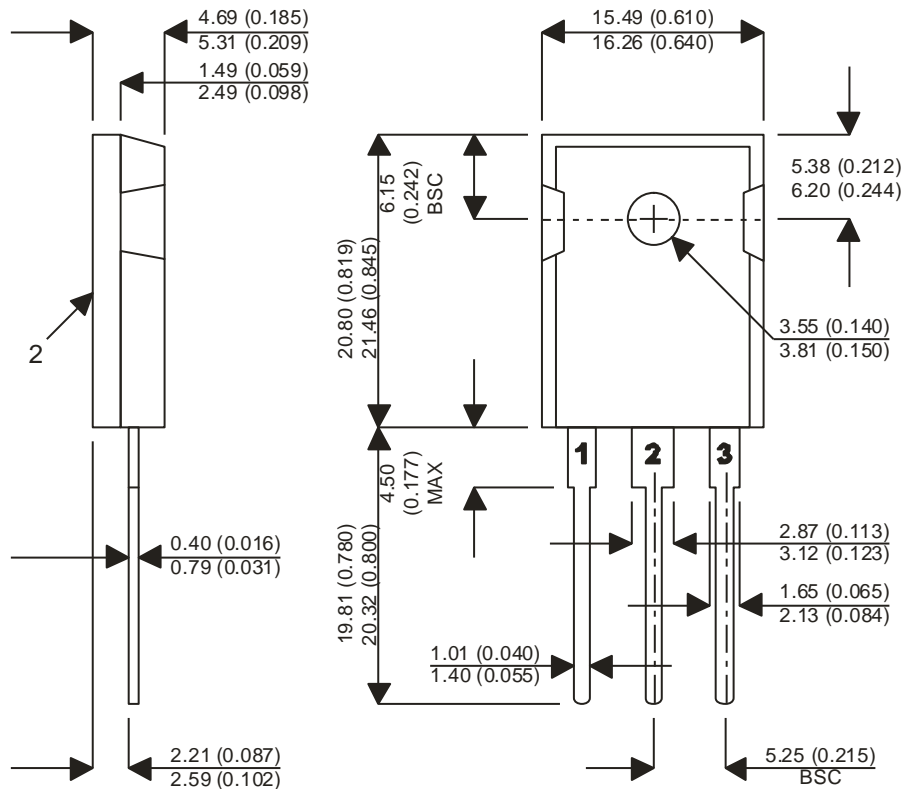

TO-247

Pin 1 - Gate

Pin 2 - Source

Pin 3 - Drain

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [tt electronics](#) manufacturer:

Other Similar products are found below :

[L083S392LF](#) [L061S391LF](#) [L091S224LF](#) [L061S220LF](#) [BCN164A562J7](#) [BCN164AB470J7](#) [898-3-R150K](#) [89XR1KLF](#) [67WR200KLFTB](#)
[68XR2MEG](#) [72XR2.5K](#) [82PR25K](#) [84WR10KTR](#) [OPB660N](#) [OPB842W51Z](#) [OPB870T55](#) [OPF430](#) [P110KV1-0Y20BR50K](#) [P170SP1-](#)
[FC15AR10K](#) [89XHR10K](#) [L083C101](#) [91XR5K](#) [SML100M12MSF](#) [PFC-W0805LF-03-2870-B](#) [2627](#) [CR200L.5](#) [RC07GF220J](#) [RC55LF-D-](#)
[196R-B-B](#) [3371R5KL.5](#) [HM00-01800](#) [3371R5KL.25](#) [L083C122](#) [WH25-47RJI](#) [WH5-100RJI](#) [040585XM](#) [CHP1-100-1R00-F](#) [OPB471T11](#)
[OPB70DWZ](#) [OPB817Z](#) [OPB830W11Z](#) [OPB972T51](#) [OPT-LY-04FL](#) [WMHP100-50RF](#) [W23-15RJI](#) [L083S331LF](#) [WH50-5R6JB006](#) [WH50-](#)
[330RJI](#) [WH200-R10JI](#) [W23-22RJI](#) [W23-22KJI](#)