



## FC-SE2014-Series SMD Flat Wire High Current Inductor

### Applications


- Industrial computers
- High current switching regulators
- DC/DC converter
- Filter
- Magnetically shielded
- Flat wire coil for low losses at high frequency
- Low stray field
- Operating temperature:  $-40\text{ }^{\circ}\text{C}$  to  $+155\text{ }^{\circ}\text{C}$




#### 1. Dimensions: [mm]

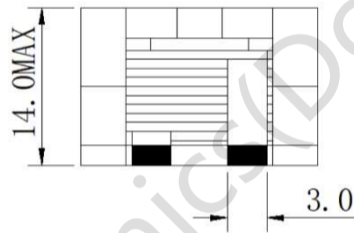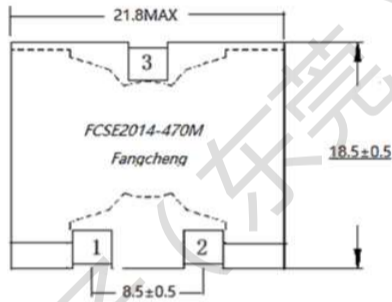


#### 2. Recommended Land Pattern: mm

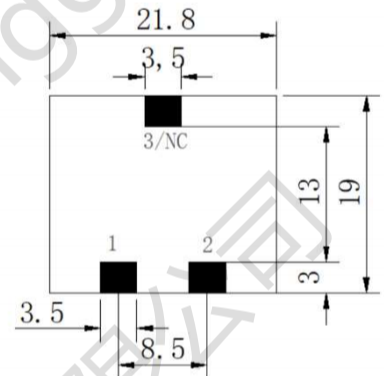

#### 3. Schematic:



#### 4. Temperature rise current curve

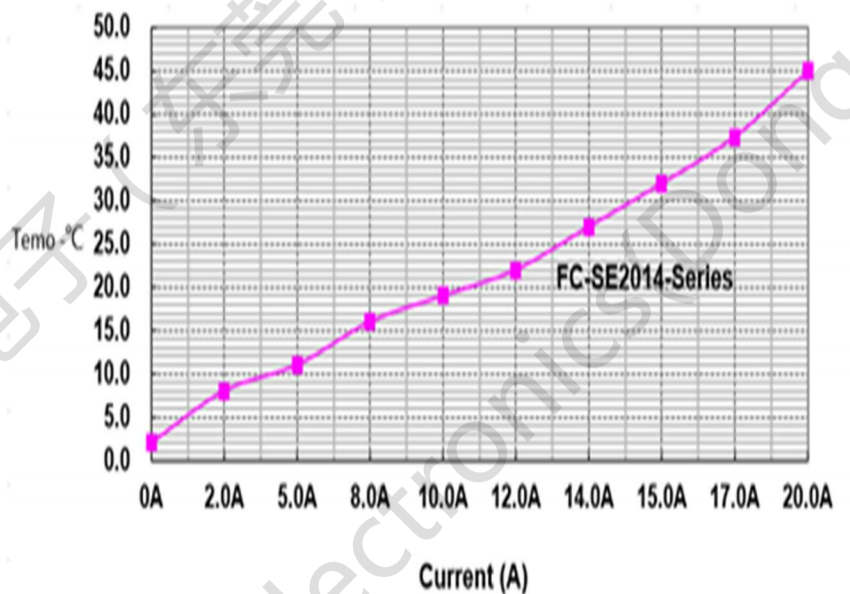

#### 5. Customer Application:





# 方成电子（东莞）有限公司

## FC-HER2014-Series -SMD Flat Wire High Current Inductor

### 6. ELECTRIC CHARACTERISTICS

Order Code	L( $\mu$ H)	DCR ( $m\Omega$ )		Irms	Isat
	$\pm 20\%$	typ	max	A	A
FC-SE2014-100M	10.0	5.35	6.35	17.0	21.0
FC-SE2014-150M	15.0	5.35	6.35	17.0	17.0
FC-SE2014-220M	22.0	5.35	6.35	17.0	11.0
FC-SE2014-330M	33.0	5.35	6.35	17.0	8.5
FC-SE2014-470M	47.0	5.35	6.35	17.0	6.0

#### Remark:

<1>Inductance: 100KHz 0.1V






<2>Tolerance of inductance: $\pm 20\%$

<3>Isat: The value of current indicates that inductance drops 30%( Typical ) from its initial value


<4>Irms:The value of current indicates that the temperature of the coil is increase 40°C (Typical)

<5>Test condition: Ta= 25°C

### 7. Inductance VS Current Curve:

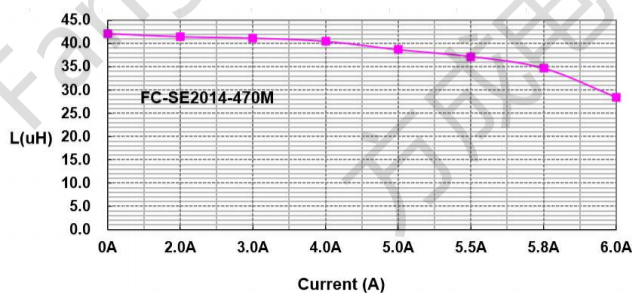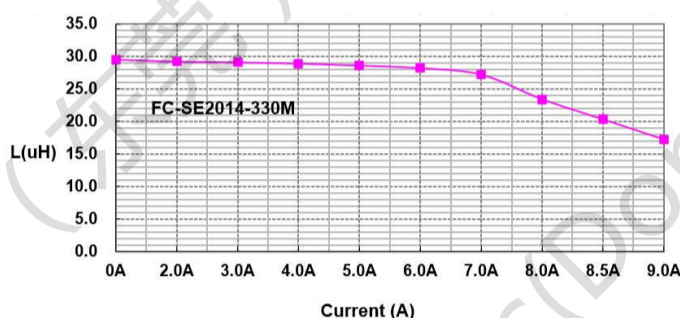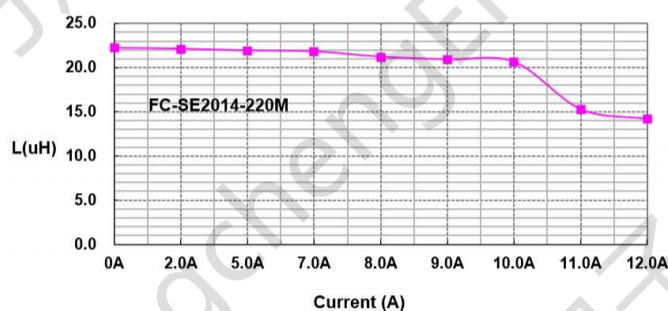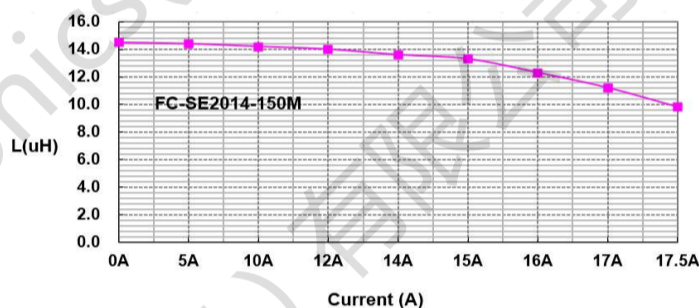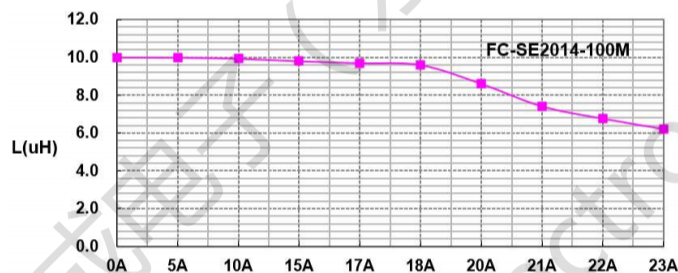

### 8. Temperature rise current curve

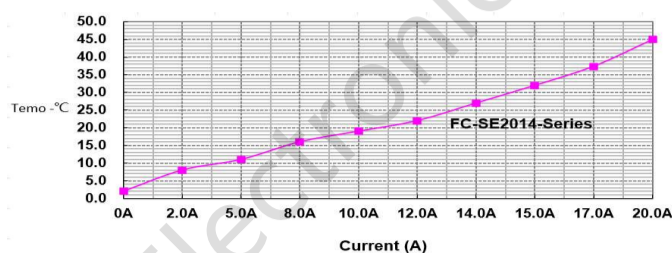

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Inductors](#) category:*

*Click to view products by [FANGCHENG](#) manufacturer:*

Other Similar products are found below :

[CR32NP-100KC](#) [70F224AI](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#)  
[PE-53601NL](#) [PE-53602NL](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-R47-R](#) [HC8-1R2-R](#)  
[HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-4R7M](#) [RCP1317NP-391L](#) [DH2280-4R7M](#) [DS1608C-106](#) [B10TJ](#) [B82498B3101J000](#) [ELJ-](#)  
[RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#)  
[1812LS-224XJ](#) [1812LS-563XJ](#) [1812LS-683XJ](#) [1812LS-824XJ](#) [NIN-FB101JTR110F](#) [NIN-FB471JTR62F](#) [NIN-FC1R5JTR220F](#) [NIN-](#)  
[HCR15JTRF](#) [NIN-HCR33JTRF](#) [NIN-HDR22JTRF](#) [NIN-HDR82JTRF](#) [NIN-HK2N7STRF](#) [NIN-PA150KTR370F](#) [NIN-PB100KTR550F](#)