


## Current Compensated Ring Core Double Chokes LCM7060-LCM1513-Series

Features:


- 1、 LCMrealizes big size and Hight current
- 2、 High Impedance and Excellent Frequency Characteristic.
- 3、 Self Electromagnetic Shielding.
- 4、 Low Magnetic Flux Leakage

Applications:

Used for power line noise suppression for any electronic devices.  
Used to counter adapter/battery line noise for relatively large electronic devices such as notebook PCs, stand-alone word processors,etc.




### 1.SHAPES AND DIMENSIONS Unit:mm

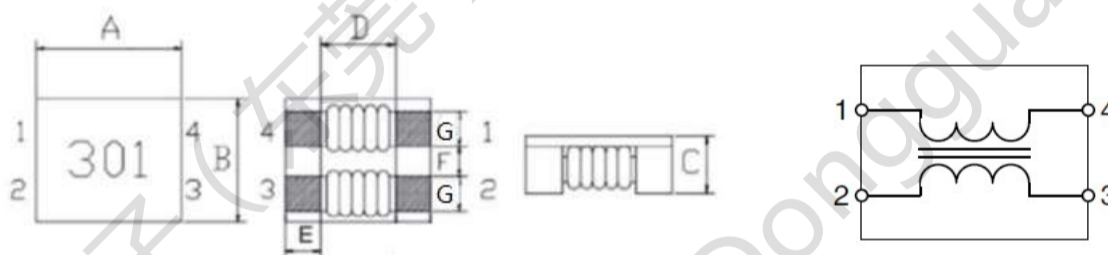

PartNumber	A	B	C	D Typ	E(ref)	F(ref)	G(ref)
LCM7060	7.0±0.5	6.0±0.5	3.5±0.3	3.5	1.5	1.5	1.75
LCM9070	9.5±0.5	7.0±0.5	5.0±0.3	5.5	1.75	2.0	1.75
LCM1211	12.5±0.5	10.8±0.5	6.5MAX	7.0	2.7	2.7	2.50
LCM1513	15.5±0.5	13.0±0.5	6.8/MAX	9.0	3.0	3.0	3.3

### 2.MEASURING CIRCUITS



- A chip-type common mode filter for large current applications. Common mode impedance surpasses 300 to 1000 $\Omega$  at 100MHz. Noise is greatly suppressed.
- Capable of handling the highest current (up to 10A) of any chiptype common mode filter.
- Height and size have been considered, resulting in a compact and light-weight choke coil. Applicable for the miniaturization required to reduce the size and weight of portable equipment.
- The products contain no lead and also support lead-freesoldering.
- This product does not contain regulated substances that are slated to be included in RoHS.

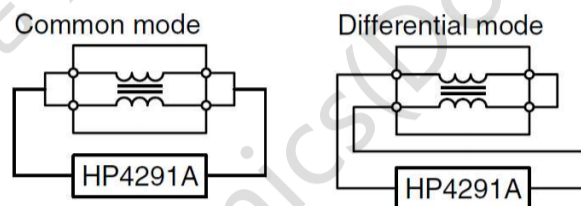

### 3.ELECTRICAL CHARACTERISTICS

PART Number	Z( $\Omega$ ) at 100 MHz		RDC(m $\Omega$ ) max	Rated Current (A)Max	IR (M $\Omega$ )Min	Rated Voltage Vdc(V)
	Min	TYP				
LCM7060-101	100	140	10	9	10	80-125
LCM7060-301	225	300	10	5	10	
LCM7060-501	275	350	10	5	10	
LCM7060-601	500	700	15	4	10	
LCM7060-701	500	700	15	4	10	
LCM7060-102	800	1020	17	3	10	
LCM7060-132	910	1300	21	2.5	10	
LCM7060-222	1700	2000	60	1.2	10	
LCM7060-272	2000	2700	65	1.0	10	
LCM7060-302	2200	3500	80	0.8	10	

### 4. IMPEDANCE vs. FREQUENCY CHARACTERISTICS

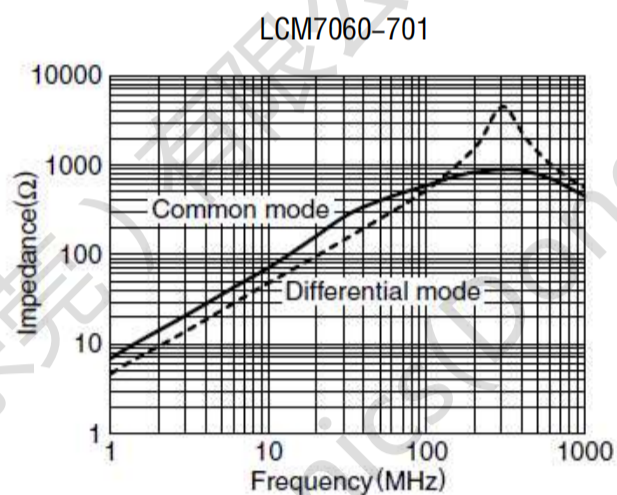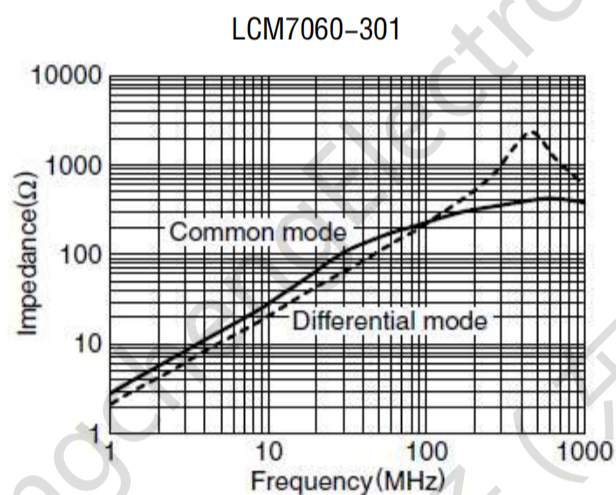


### 5.ELECTRICAL CHARACTERISTICS


PART Number	Z( $\Omega$ ) at 100 MHz		RDC(m $\Omega$ ) Max	Rated Current (A)Max	IR (M $\Omega$ )Min	Rated Voltage Vdc(V)
	Min	TYP				
LCM9070-301	225	300	6.0	10.0	10	50-80
LCM9070-501	450	600	8.0	8.0	10	
LCM9070-701	500	700	10.0	6.0	10	
LCM9070-102	750	1000	13.0	5.0	10	
LCM9070-152	1000	1500	15.0	4.5	10	
LCM9070-202	1500	2000	20.0	4.0	10	
LCM9070-222	1700	2200	28.0	4.0	10	
LCM9070-272	2000	2700	40.0	3.5	10	
LCM9070-302	2400	3200	45.0	3.0	10	

### 6.IMPEDANCE vs. FREQUENCY CHARACTERISTICS

LCM9070-701

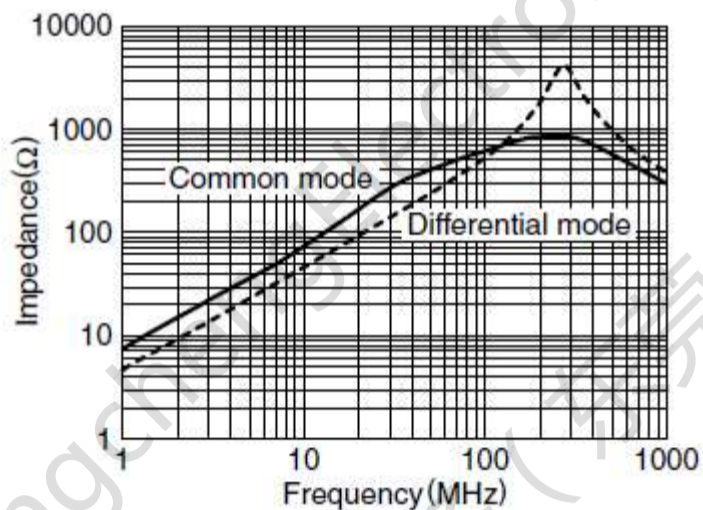

#### MEASURING CIRCUITS

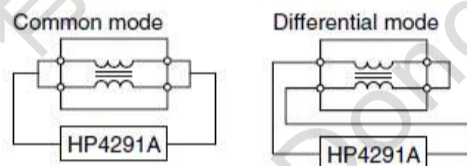


## 7.ELECTRICAL CHARACTERISTICS

PART Number	Z( $\Omega$ ) at 100 MHz		RDC(m $\Omega$ ) Max	Rated Current (A)Max	IR (M $\Omega$ )Min	Rated Voltage Vdc(V)
	Min	TYP				
LCM1211-800	80	230	2.0	10.0	10	125
LCM1211-701	500	700	6.0	8.0	10	125
LCM1211-801	600	800	8.0	8.0	10	125
LCM1211-102	750	1000	14.0	6.0	10	125
LCM1211-222	2200	2500	35.0	1.8	10	125
LCM1211-272	2300	2700	50.0	1.5	10	125

## 8.ELECTRICAL CHARACTERISTICS

PART Number	Z( $\Omega$ ) at 100 MHz		RDC(m $\Omega$ ) Max	Rated Current (A)Max	IR (M $\Omega$ )Min	Rated Voltage Vdc(V)
	Min	TYP				
LCM1513-301	250	300	5.0	13	10	80
LCM1513-551	450	550	6.0	10	10	80
LCM1513-701	500	700	7.0	10	10	80
LCM1513-102	800	1000	8.5	10	10	80
LCM1513-152	1100	1500	9.0	8.0	10	80

## 9.IMPEDANCE vs. FREQUENCY CHARACTERISTICS

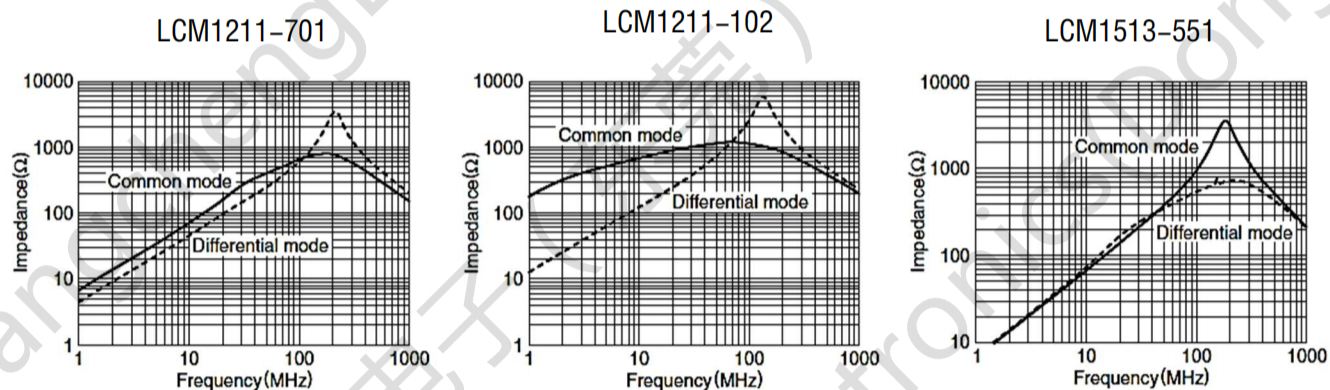

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Common Mode Chokes / Filters](#) category:*

*Click to view products by [FANGCHENG](#) manufacturer:*

Other Similar products are found below :

[PE-64683](#) [RD5122-6-9M6](#) [RD6137-6-7M5](#) [RD8147-16-3M0](#) [ST6118T-R](#) [FE3X025-10-7NL](#) [RD7147-25-0M7](#) [TCM0806G-350-2P-T](#)  
[TCM0806G-650-2P-T](#) [IND-0110](#) [UAL21VR0802000](#) [UALSC023000000](#) [UALSC1020JH000](#) [UALSU10VD20010](#) [UALSU9VD070100](#) [36-00037](#) [UALW21HS072450](#) [UALSU9H0208000](#) [UAL24VK06450CH](#) [PLT10HH501100PNB](#) [PLT10HH401100PNB](#) [PLT10HH1026R0PNB](#)  
[36-00029-01](#) [PE-67531](#) [TLH10UB](#) [113 0R5](#) [2752045447](#) [7351V](#) [CMF16-153131](#) [RD7147-6-6M0](#) [T8116NLT](#) [FE2X10-4-2NL](#) [36-00029-07](#)  
[T8003NLT](#) [CTX01-13663](#) [CTX66-19521-R](#) [RC212-0.5-10M](#) [RC112-0.4-15M](#) [RC212-0.6-6M8](#) [RC212-0.4-15M](#) [RC112-0.3-30M](#)  
[WTCF2012Z0M751PB](#) [PH9408.814NLT](#) [PAC6006.364NLT](#) [PAC6006.444NLT](#) [PAC6006.204NLT](#) [PH9407.204NLT](#) [PAC6006.264NLT](#)  
[PH9408.105NLT](#) [PH9408.494NLT](#) [PAC6006.104NLT](#)