

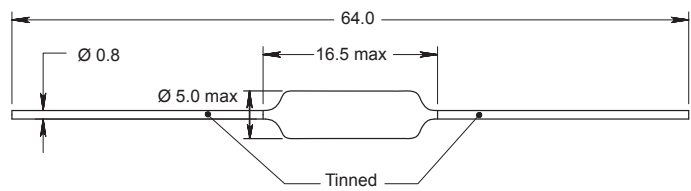



08 CCM
Non-magnetic

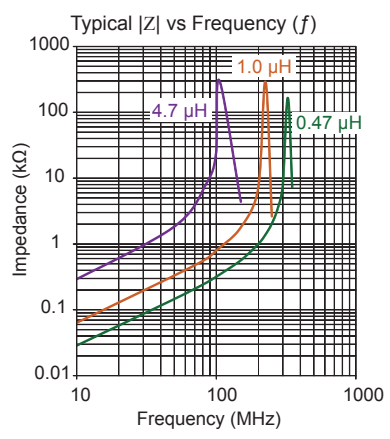

Leaded Inductors / Medical Applications (Fixed Choke Coils)

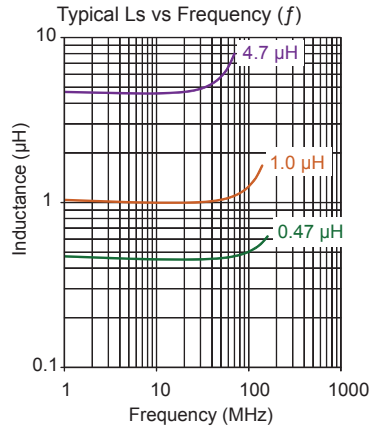

Part No	Inductance L (µH)	f _L (MHz)	Tol ± (%)	Q min	f _Q (MHz)	SRF typ (MHz)	DCR max (Ω)	Rated DC Current max (mA)
08CCM-R47X-YY	0.47	1	10,20	65	25	400	0.060	2880
08CCM-R56X-YY	0.56	1	10,20	60	25	400	0.080	2160
08CCM-R68X-YY	0.68	1	10,20	60	25	350	0.100	1840
08CCM-R82X-YY	0.82	1	10,20	60	25	300	0.130	1540
08CCM-1R0X-YY	1.00	1	10,20	60	25	250	0.160	1280
08CCM-1R2X-YY	1.20	1	10,20	40	7.9	230	0.220	1080
08CCM-1R5X-YY	1.50	1	10,20	40	7.9	220	0.310	900
08CCM-1R8X-YY	1.80	1	10,20	40	7.9	200	0.350	850
08CCM-2R2X-YY	2.20	1	10,20	40	7.9	180	0.550	640
08CCM-2R7X-YY	2.70	1	10,20	40	7.9	160	0.650	625
08CCM-3R3X-YY	3.30	1	10,20	35	7.9	140	0.900	525
08CCM-3R9X-YY	3.90	1	10,20	35	7.9	130	1.200	475
08CCM-4R7X-YY	4.70	1	10,20	35	7.9	120	1.450	415

Core Material : Phenolic

Revision date : 09 Aug 2019

SPQ :

Packing Form	Taped / Reel	Taped / Ammo pack
Axial	1200 [-01]	500 [-02]

● Bold figure for Tol% is standard ● All dimensions in mm

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Fastron](#) manufacturer:

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#)
[PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#)
[9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [1206CS-151XG](#) [RCH664NP-140L](#)
[RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#) [DH2280-4R7M](#)
[DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#)
[1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#)