
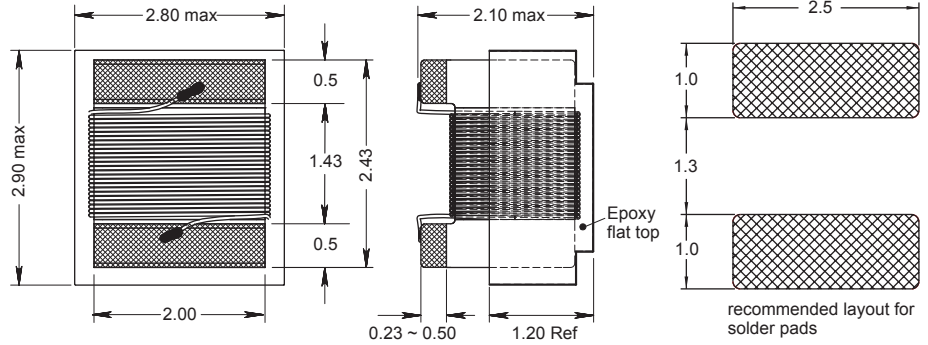





# 1008 F

Engineer's Kit : EK-1008F-X



(Wire wound - open)

Chip Inductors for RF Applications

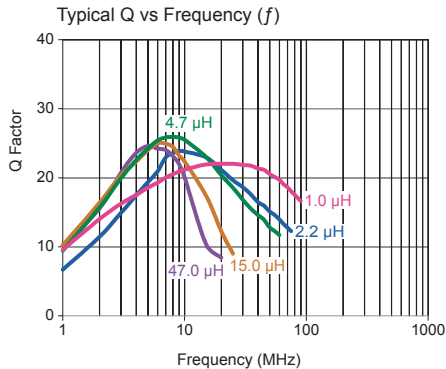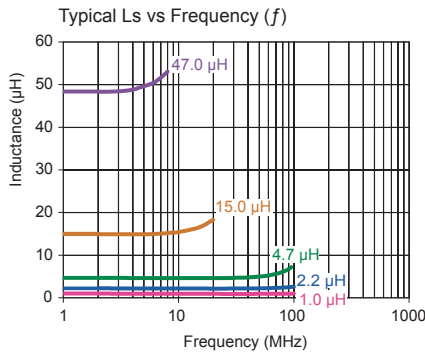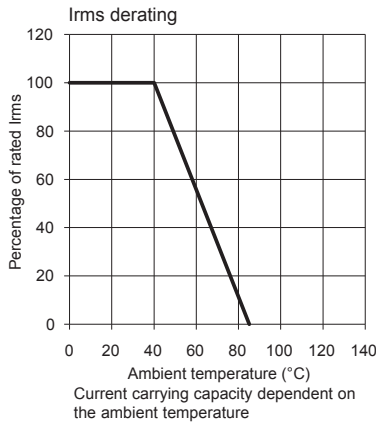

Part No	Inductance L (μH)	f <sub>L</sub> (MHz)	Tol ± (%)	Q min	f <sub>Q</sub> (MHz)	SRF (MHz)	DCR max (Ω)	Rated DC Current (mA)
1008F-1R0K-YY	1.0	7.9	10	15	7.9	190 min	0.32	500
1008F-1R2K-YY	1.2	7.9	10	25	7.9	210 min	0.68	650
1008F-1R5K-YY	1.5	7.9	10	25	7.9	190 min	0.76	630
1008F-1R8K-YY	1.8	7.9	10	25	7.9	170 min	0.84	600
1008F-2R2K-YY	2.2	7.9	10	25	7.9	150 min	1.10	520
1008F-2R7K-YY	2.7	7.9	10	25	7.9	135 min	1.28	490
1008F-3R3K-YY	3.3	7.9	10	25	7.9	120 min	1.46	450
1008F-3R9K-YY	3.9	7.9	10	25	7.9	105 typ	1.56	420
1008F-4R7K-YY	4.7	7.9	10	25	7.9	90 typ	1.68	400
1008F-5R6K-YY	5.6	7.9	10	25	7.9	80 typ	1.82	380
1008F-6R8K-YY	6.8	7.9	10	25	7.9	70 typ	2.00	360
1008F-8R2K-YY	8.2	7.9	10	25	7.9	65 typ	2.65	330
1008F-100K-YY	10	7.9	10	25	7.9	60 typ	2.95	300
1008F-120K-YY	12	2.5	10	24	7.9	40 typ	4.80	280
1008F-150K-YY	15	2.5	10	23	7.9	35 typ	5.00	260
1008F-180K-YY	18	2.5	10	23	7.9	35 typ	5.80	220
1008F-220K-YY	22	2.5	10	22	7.9	30 typ	6.80	200
1008F-240K-YY	24	2.5	10	22	7.9	30 typ	6.80	200
1008F-270K-YY	27	2.5	10	23	7.9	30 typ	7.70	190
1008F-330K-YY	33	2.5	10	22	7.9	27 typ	8.90	180
1008F-390K-YY	39	2.5	10	20	7.9	20 typ	9.20	190
1008F-470K-YY	47	2.5	10	21	7.9	20 typ	11.0	150
1008F-820K-YY	82	2.5	10	13	7.9	14 typ	22.0	60
1008F-101K-YY	100	2.5	10	8	7.9	10 typ	25.0	55

Core Material : Ferrite

Revision date : 03 Sep 2020

SPQ : Taped / Reel 1000 [-08]  
2000 [-01]  
7500 [-04]

Remarks: - Unlisted inductance values available upon request.  
- 2% and 5% tolerance available upon request.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Inductors](#) category:*

*Click to view products by [Fastron](#) manufacturer:*

Other Similar products are found below :

[CR32NP-100KC](#) [CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#)  
[MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#)  
[PG0936.113NLT](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [1206CS-151XG](#)  
[RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#)  
[DH2280-4R7M](#) [DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#)  
[1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#)