


X8R Dielectric

General Specifications

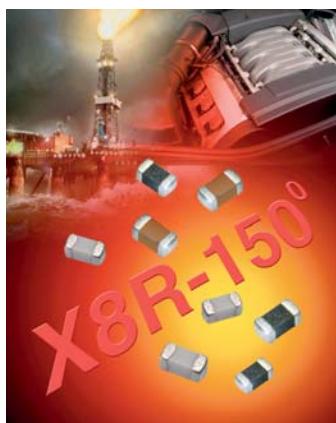

AVX have developed a range of multilayer ceramic capacitors designed for use in applications up to 150°C. These capacitors are manufactured with an X8R dielectric material which has a capacitance variation of ±15% between -55°C and +150°C.

The need for X8R performance has been driven by customer requirements for parts that operate at elevated temperatures. They provide a highly reliable capacitor with low loss and stable capacitance over temperature.

They are ideal for automotive under the hood sensors, measure while drilling and log while drilling. Typical applications include wire line logging tools such as gamma ray receivers, acoustic transceivers and micro-resistivity tools. They can also be used as bulk capacitors for high temperature camera modules.

X8R capacitors are available as standard and Automotive AEC-Q200 qualified parts. Optional termination systems, tin, FLEXITERM™ and conductive epoxy for hybrid applications are available. Providing this series with our FLEXITERM™ termination system provides further advantage to customers by way of enhanced resistance to both, temperature cycling and mechanical damage.

PART NUMBER (see page 2 for complete part number explanation)

0805	5	F	104	K	4	T	2	A
Size 0603 0805 1206	Voltage 25V = 3 50V = 5	Dielectric X8R = F	Capacitance Code (In pF) 2 Sig. Digits + Number of Zeros e.g. 10μF = 106	Capacitance Tolerance J = ± 5% K = ±10% M = ± 20%	Failure Rate 4 = Automotive A = Not Applicable	Terminations T = Plated Ni and Sn Z = FLEXITERM™ U = Conductive Epoxy for Hybrid apps	Packaging 2 = 7" Reel 4 = 13" Reel	Special Code A = Std. Product

NOTE: Contact factory for availability of Termination and Tolerance Options for Specific Part Numbers.

SIZE		0603		0805		1206							
	WVDC	25V	50V	25V	50V	25V	50V						
271	Cap (pF)	270	G	G	J								
331		330	G	G	J								
471		470	G	G	J								
681		680	G	G	J								
102		1000	G	G	J	J	J						
152		1500	G	G	J	J	J						
182		1800	G	G	J	J	J						
222		2200	G	G	J	J	J						
272		2700	G	G	J	J	J						
332		3300	G	G	J	J	J						
392		3900	G	G	J	J	J						
472		4700	G	G	J	J	J						
562		5600	G	G	J	J	J						
682		6800	G	G	J	J	J						
822		8200	G	G	J	J	J						
103	Cap (μF)	0.01	G	G	J	J	J						
123		0.012	G	G	J	J	J						
153		0.015	G	G	J	J	J						
183		0.018	G	G	J	J	J						
223		0.022	G	G	J	J	J						
273		0.027	G	G	J	J	J						
333		0.033	G	G	J	J	J						
393		0.039	G	G	J	J	J						
473		0.047	G	G	J	J	J						
563		0.056	G		N	N	M						
683		0.068	G		N	N	M						
823		0.082	G		N	N	M						
104		0.1	G		N	N	M						
124		0.12	G		N	N	M						
154		0.15			N	N	M						
184		0.18			N		M						
224		0.22			N		M						
274		0.27			N		M						
334		0.33			N		M						
394		0.39			N		M						
474		0.47			N		M						
684		0.68					M						
824		0.82											
105		1											
SIZE		WVDC	25V	50V	25V	50V	25V	50V					
0603		0805		1206									
Letter	A	C	E	G	J	K	M	N	P	Q	X	Y	Z
Max. Thickness	0.33 (0.013)	0.56 (0.022)	0.71 (0.028)	0.86 (0.034)	0.94 (0.037)	1.02 (0.040)	1.27 (0.050)	1.40 (0.055)	1.52 (0.060)	1.78 (0.070)	2.29 (0.090)	2.54 (0.100)	2.79 (0.110)
PAPER						EMBOSSSED							



X8R Dielectric

General Specifications



APPLICATIONS FOR X8R CAPACITORS

- All market sectors with a 150°C requirement
- Automotive on engine applications
- Oil exploration applications
- Hybrid automotive applications
 - Battery control
 - Inverter / converter circuits
 - Motor control applications
 - Water pump
- Hybrid commercial applications
 - Emergency circuits
 - Sensors
 - Temperature regulation

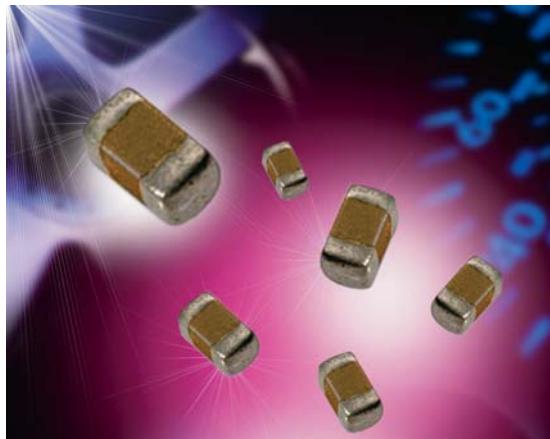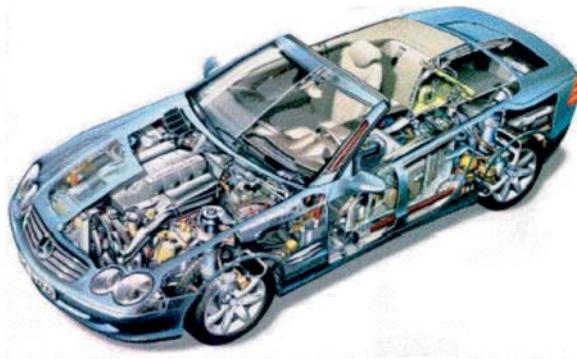

ADVANTAGES OF X8R MLC CAPACITORS


- Capacitance variation of $\pm 15\%$ between -55°C and $+150^{\circ}\text{C}$
- Qualified to the highest automotive AEC-Q200 standards
- Excellent reliability compared to other capacitor technologies
- RoHS compliant
- Low ESR / ESL compared to other technologies
- Tin solder finish
- FLEXITERM™ available
- Hybrid available
- 50V range available

ENGINEERING TOOLS FOR HIGH VOLTAGE MLC CAPACITORS

- Samples
- Technical Articles
- Application Engineering
- Application Support

X8R Dielectric

0805, 50V, X8R Typical Temperature Coefficient

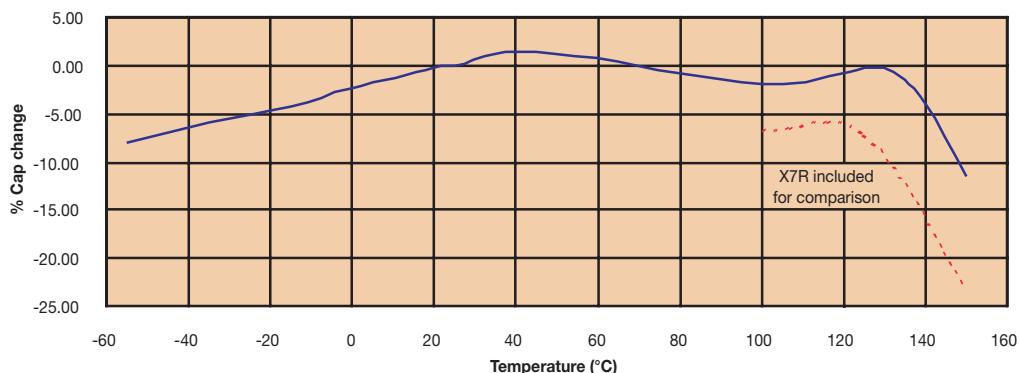

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for AVX manufacturer:

Other Similar products are found below :

[M39014/220755](#) [M39014/220758](#) [MD015A222JAB](#) [VE17M02750K--](#) [SV097C105MAA](#) [DST-1A158-001U-001](#)
[CX3225SB48000D0WPSC2](#) [M39014/22-0833](#) [M39014/02-1294](#) [CDR33BP132BJUR](#) [M39014/221011](#) [M39014/22-0772](#) [MD015C273KAB](#)
[MD015A472JAB](#) [MD015A181JAB](#) [M39014/220223](#) [CK12BX331K](#) [M39014/220550](#) [M39014/220754](#) [CK13BR473K](#) [M39014/220764](#)
[M39014/220479](#) [PBRC5.00MR50X000](#) [SR151A331KARTR1](#) [F981C225MMA](#) [CR21-10R0F-T](#) [009286001203906](#) [M39014/22-1181](#)
[FFLI6B3007KJE](#) [MLX91206LDC-CAL-001-SP](#) [18125A333JAT2A](#) [KIT5000UZ](#) [KITTYPE1400 LF](#) [LD065A332FAB2A](#) [SA205C393JAA](#)
[308016056000413](#) [SR211A151FAA](#) [FFB24I0755K--](#) [CK06BX472K](#) [M39014/05-2731](#) [M39014/220476](#) [CWR29JC476KCHC](#)
[TAJB225M035R](#) [TAP106K035CCS](#) [THJD336K025RJN](#) [TLCU336M004XTA](#) [TPSA475K010R1400](#) [TPSD336M035R0200](#)
[TPSD337K010R0150](#) [TWAE757M060CBEZ0700](#)