





**Dimensions:** dimensions are in mm

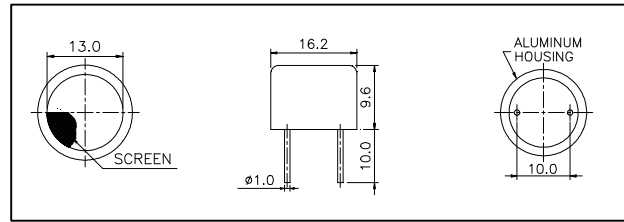

**Impedance/Phase Angle vs. Frequency**

Tested under 1Vrms Oscillation Level

328SR160 Impedance ————  
 328SR160 Phase .....  
 328ST160 Impedance ————  
 328ST160 Phase .....  
 328ST160 Phase .....

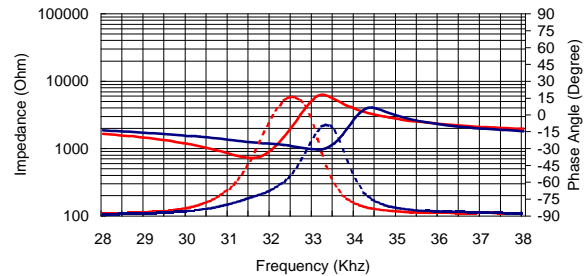


**Specification**


<b>328ST160</b>	Transmitter
<b>328SR160</b>	Receiver
<b>Center Frequency</b>	32.8±1.0Khz
<b>Bandwidth (-6dB)</b>	328ST160 2.5Khz 328SR160 2.5Khz
<b>Transmitting Sound Pressure Level</b>	115dB min.
at 32.8Khz; 0dB re 0.0002μbar per 10Vrms at 30cm	
<b>Receiving Sensitivity</b>	-67dB min.
at 32.8Khz 0dB = 1 volt/μbar	
<b>Capacitance at 1Khz</b>	±20% 2400 pF
<b>Max. Driving Voltage (cont.)</b>	20Vrms
<b>Total Beam Angle</b>	-6dB 100° typical
<b>Operation Temperature</b>	-30 to 80°C
<b>Storage Temperature</b>	-40 to 85°C

**Sensitivity/Sound Pressure Level**

Tested under 10Vrms @30cm

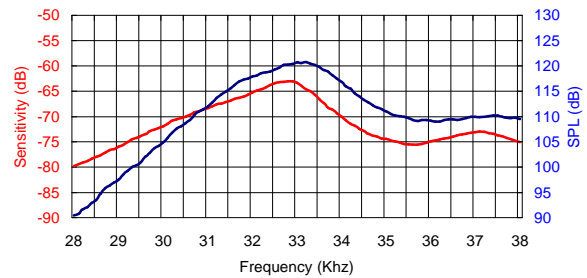

**Beam Angle:** Tested at 32.8Khz frequency

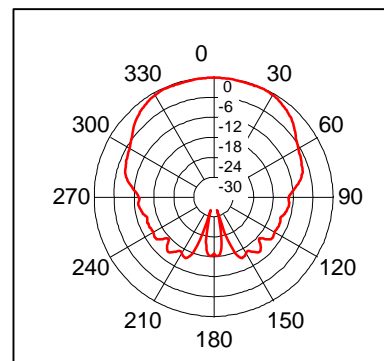

All specification taken typical at 25°C  
 Closer frequency tolerance can be supplied upon request.


Model available:

1	328ST/R160	Aluminum Housing
---	------------	------------------


**328SR160 Receiver**

**328ST160 Transmitter**


**Sensitivity Variation vs. Loaded Resistor**

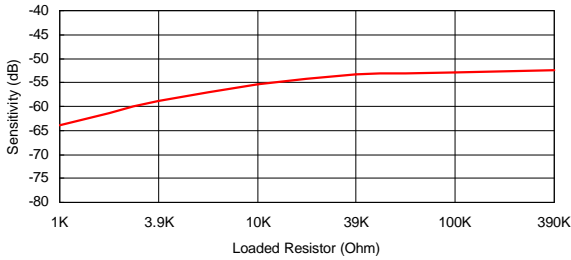


**SPL Variation vs. Driving Voltage**

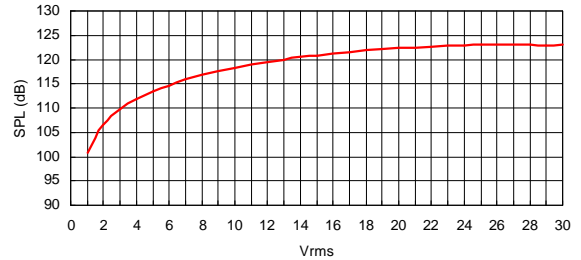


**Center Frequency Shift vs. Loaded Resistor**

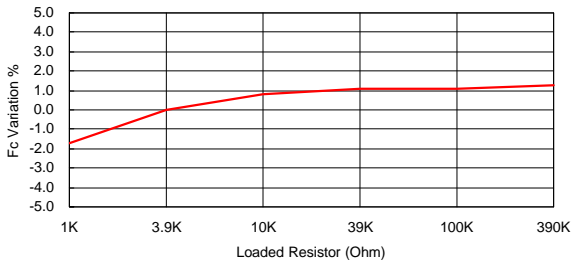


**Center Frequency Shift vs. Driving Voltage**

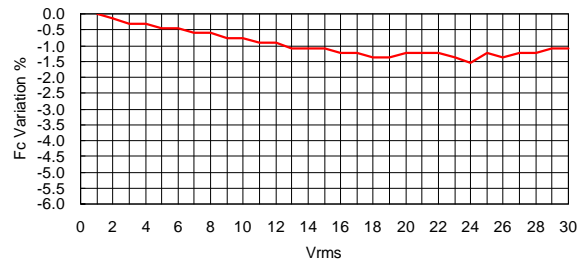


**Sensitivity Variation vs. Temperature**

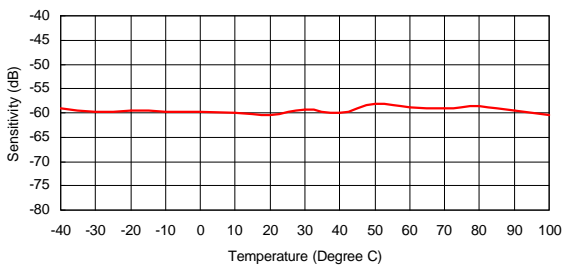


**SPL Variation vs. Temperature**

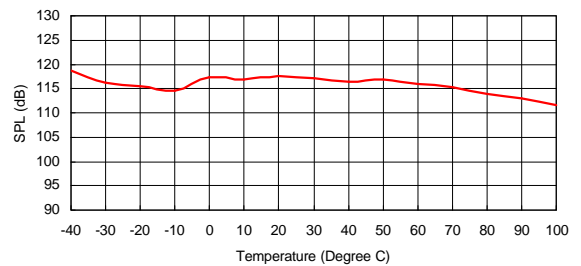

**Center Frequency Shift vs. Temperature**

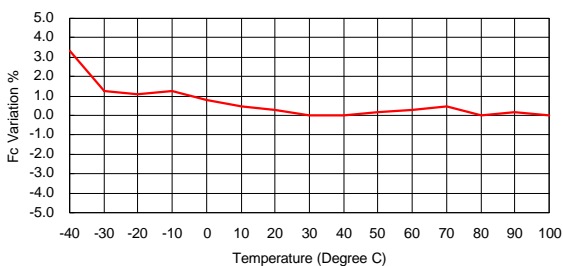

**Center Frequency Shift vs. Temperature**

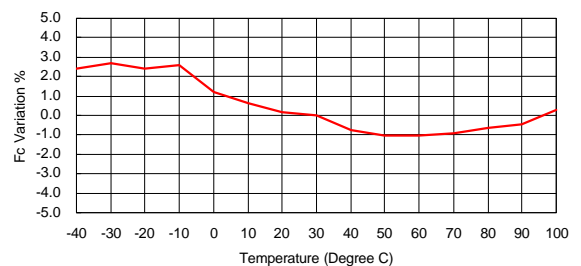

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [prowave](#) manufacturer:*

Other Similar products are found below :

[400SR120](#) [400ST100](#) [FS-2513P](#) [328ER250](#) [M165D25](#) [400SR10B](#) [K4000001](#) [400ST120](#) [400SR160](#) [400EP18A](#) [500MB120](#) [K4000005](#)  
[K4000004](#) [400PT160](#)