
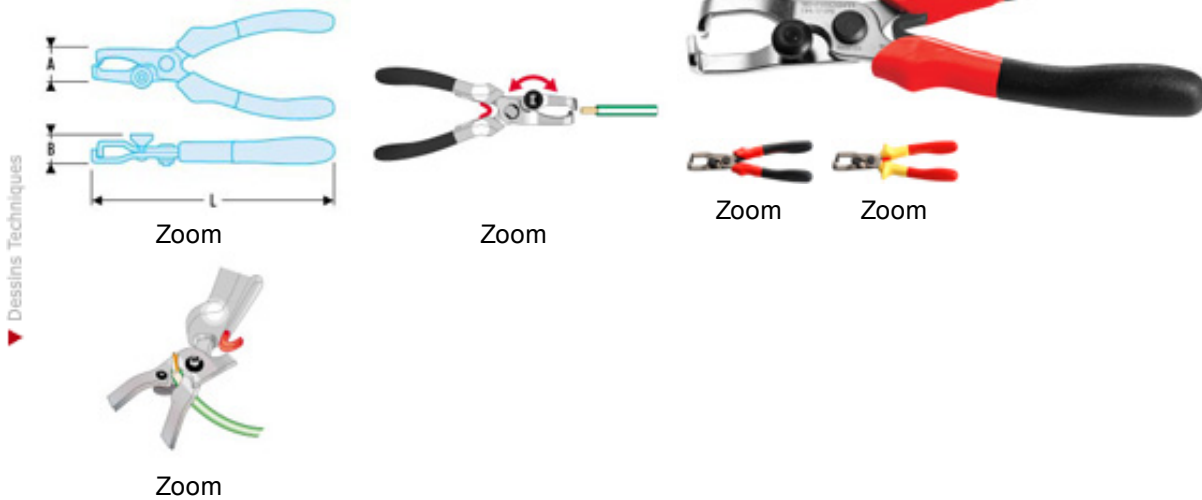






- For wire 0.5 to 6 mm<sup>2</sup>.
- Wire diameter presetting.
- Long stripping length.
- Integral wire-cutter.
- Hinge adjusting screw.
- 3 options

- CPE Chrome finish, ergonomic grips, return spring;  
 - TE Varnished finish, ergonomic grips, return spring;  
 - VE Varnished finish, return spring, 1000V insulated grips for electrical safety to EN 60900 and , for working on or near live components.



▼ Dessins Techniques

▼ Données Techniques

		L	A	B	
	mm <sup>2</sup>	mm	mm	mm	g
194.17CPE	0,5 - 6	195	17	16	160
194.17TE	0,5 - 6	195	17	16	160
194.17VE	0,5 - 6	195	17	16	165

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [facom](#) manufacturer:*

Other Similar products are found below :

[92A.5,5](#) [ARB.5.5X40](#) [AMR](#) [ANXR10X75](#) [AEF.J6](#) [AEF.J1](#) [EH.107](#) [EH.103](#) [256.2.5](#) [MT.J3](#) [986058](#) [75.10](#) [84E.J1](#) [455B](#) [440.19](#) [44.6X7](#)  
[440.6](#) [440.21](#) [R.306-25D](#) [R.217](#) [R.5](#) [J.13LA](#) [431.LE](#) [405.10](#) [425.E](#) [405.12E](#) [R.216](#) [601](#) [AEF.1,5X35](#) [AEFP.00X35](#) [AEX.J2](#) [AEX.9X75](#)  
[AEX.7X35](#) [251A.2.5](#) [HB.2B](#) [440.20](#) [435.E](#) [432.LMT](#) [44.12X13](#) [440.5H](#) [440.22](#) [R.304DA](#) [427.MT](#) [416.PMT](#) [113A.6C](#) [113A.10C](#) [251A.3](#)  
[89S.JP8](#) [AEF.1,8X35](#) [75.7](#)