

## Economical Environmental Temperature, Humidity and Barometric Pressure Wall Mount Sensors

### EWS

#### Features

- ✓ Thermocouple, RTD or Thermistor Sensor Models
- ✓ Temperature, Temperature / Humidity and Barometric Pressure Transmitter Models
- ✓ Low-Cost Miniature Design
- ✓ Connects to Computer, Datalogger, or Industrial Controller/Meter

NEWPORT's low cost environmental wall mount sensors keep your office, computer room or laboratory looking great.

They are compatible with process meters, controllers, recorders, data loggers and data acquisition systems.

Thermocouple, RTD and Thermistor models come with 1 m (40") leads.

Temperature, Temperature/ Humidity and Pressure units come with user selectable industry standard 4 to 20 mA or 1 to 5 Vdc output.



#### NEWPORT PRODUCT INFO

- [MANUAL - EWS-TC/RTD/TH/MB PDF Version](#) 
- [MANUAL - EWS-BP PDF Version](#) 
- [MANUAL - EWS-RH PDF Version](#) 
- [MANUAL - EWS-TX PDF Version](#) 
- [PRICE](#)

 REQUIRES ADOBE ACROBAT - [HELP](#)

## Specifications

### Thermocouple - EWS-TC-\* Sensors

**Max. Temperature:** 60°C (140°F)

**Accuracy:** ±1.1°C (1.98°F)

**Sensor Types:** J,K,T,E

**Sensor Lead Length:** 1m (40")

**Lead Material:** 24 AWG, PFA coated

### RTD Sensor - EWS-RTD

**Max. Temperature:** 60°C (140°F)

**Accuracy:** ±1°C (1.8°F)

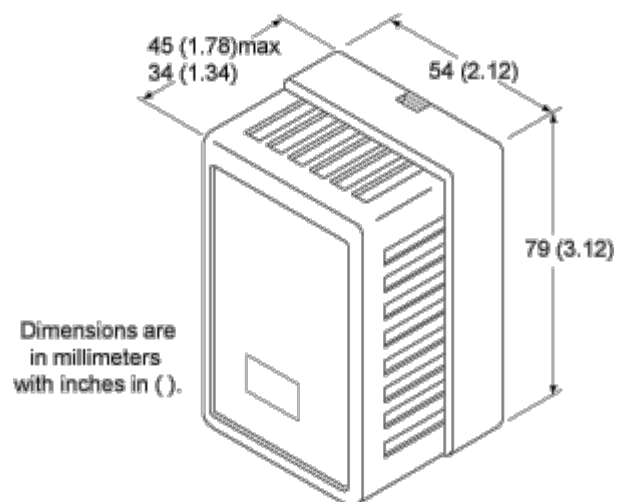
**Sensor Type:** 100 Ohm Pt. 0.00385

**Sensor Lead Length:** 1m (40")

**Lead Material:** PFA insulated 3-conductor 26 AWG stranded Nickel-plated Copper

**Thermistor Sensor - EWS-TH****Max. Temperature:** 60°C (140°F)**Accuracy:** ±0.2°C (0.36°F)**Sensor Type:** OMEGA® "400" Series 2252 ohm @ 25°C**Sensor Lead Length:** 1m (40")**Lead Material:** PVC insulated 2-conductor 22 AWG stranded Nickel-plated Copper**Temperature Transmitter - EWS-TX****Temperature Range:** -18 to 57 °C (0 to 135°F)**Accuracy @ 25°C:****In Still Air:** ±0.7°C (±1.2°F) @ 25°C; 1.4°C (±2.5°F) across full range**In Moving Air:** ±1.4°C (±2.5°F) @ 25°C; ±1.7°C (±3°F) across full range

Note: Not recommended for fast moving air applications

**Repeatability:** ±0.3°C (±0.5°F)**Output:** 4 to 20 mA or 1 to 5 Vdc (scaled across range)**Temp Time Constant:** (for 63.2% response); 9 sec. in moving air (1M/sec.); 30 sec. in still air**Power:** 8 to 18 Vdc @ 20 mA**Max. Loop Resistance:** Ohms = (V supply - 8V)/0.02 A**Sensor Type:** Solid State**Temperature/Humidity Transmitter - EWS-RH****Range:** 5 to 95% (non-condensing)**Accuracy:** From 5 to 20%, ±4% RH; From 20 to 80%, ±3%RH From 80 to 95%, ±4%RH**Repeatability:** ±1%RH**Output:** 4 to 20 mA or 1 to 5 Vdc (scaled for 0 to 100% RH)**Power:** 8 to 24 Vdc @ 20 mA**Max. Loop Resistance:** Ohms = (V supply - 8V)/0.02 A**RH Time Constant:** 100 sec., from 20 to 90%, 60 sec from 90 to 20%**Sensor Type:** Thin-film polymer capacitor (see Temperature Transmitter for temperature specifications)**Barometric Pressure Transmitter - EWS-BP-A****Pressure Range:** 20.8 to 32 inHg (10.2 to 15.7 psi)**Temperature Compensation:** across full range**Accuracy:** ±1% of span @ 25°C (77°F) plus ±0.11%/°C (0.06%/°F)**Operating Temperature Range:** 0 to 60°C (32 to 140°F)**Output:** User selectable 4 to 20 mA, 1 to 5 Vdc**Power:** 8 to 24Vdc @ 20 mA**Max. Loop Resistance:** Ohms = (V supply -8 V)/.020 A**Media Compatibility:** Clean dry air, non-corrosive gases**Mechanical****Enclosure Material:** Valox 364 PBT or Acrylonitrile Butadiene Styrene**Dimensions:** 79 x 54 x 34 (or 45) mm (3.12 L x 2.12 W x 1.34 (or 1.78" H))**Note:** The EWS Series is for indoor applications only. They are not designed to be exposed to rain, snow or other extreme weather conditions.

Model No.	Description
EWS-TC-(*)	Wall Mount thermocouple sensor
EWS-RTD	Wall Mount RTD sensor (100 Ω Pt, 0.00385)

<b>EWS-TH</b>	Wall Mount 400 series thermistor sensor
<b>EWS-TX</b>	Wall Mount temperature transmitter
<b>EWS-RH</b>	Wall Mount temperature/humidity transmitter
<b>EWS-BP-A</b>	Wall Mount barometric pressure transmitter
<b>EWS-MB</b>	Conduit box mounting bracket/wall plate adapter kit
<b>PSR-24S</b>	Regulated power supply, 24Vdc, 400mA, screw terminal
<b>PSR-24L</b>	Regulated power supply, 24Vdc, 400mA, stripped leads, UL
<b>PSR-24L-240</b>	Regulated power supply, 24Vdc, 400mA, stripped leads, 230Vac input, CE
<b>PSU-93</b>	Un-regulated power supply, 16-23Vdc, 300mA, screw terminal
<b>TX4-100</b>	Shielded 4 conductor transmitter cable 30.5m (100 ft)

\* Insert Thermocouple Type: J,K,T or E

<b>Product Selection (Specify Model Number)</b>		
<b>Part Number</b>	<b>Description</b>	<b>Qty.</b>
EWS-TC-J	Wall Mount thermocouple sensor, type J	
EWS-TC-K	Wall Mount thermocouple sensor, type K	
EWS-TC-T	Wall Mount thermocouple sensor, type T	
EWS-TC-E	Wall Mount thermocouple sensor, type E	
EWS-RTD	Wall Mount RTD sensor (100 Ohm Pt., .00385)	
EWS-TH	Wall Mount 400 series thermistor sensor	
EWS-TX	Wall Mount temperature transmitter	
EWS-RH	Wall Mount temperature/humidity transmitter	
EWS-BP-A	Wall Mount barometric pressure transmitter	
<b>Accessories</b>		
EWS-MB	Conduit box mounting bracket/wall plate adapter kit	
PSR-24L	Regulated Power Supply, US plug, 90 to 264 Vac input, 24 Vdc output, 400 mA, stripped leads, UL	
PSR-24S	Regulated Power Supply, US plug, 90 to 264 Vac input, 24 Vdc output, 400 mA, screw terminals, UL	
PSR-24L-230	Regulated Power Supply, European plug, 230 Vac input, 24 Vdc output, 400 mA, stripped leads, CE	
TX4-100	Shielded 4 conductor transmitter cable 30.5m (100 ft)	

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Board Mount Temperature Sensors](#) category:*

*Click to view products by [Newport](#) manufacturer:*

Other Similar products are found below :

[5962-8757102XA](#) [66F115](#) [MCP9808-EMS](#) [MCP98242T-BEMNY](#) [MCP9843T-BEMC](#) [EMC1063-1-ACZL-TR](#) [NCT218FCT2G](#)  
[O53GAB175A-160Y](#) [OH10/62,112](#) [3610085020002](#) [389049M9527](#) [TC622EAT](#) [TC6501P095VCTTR](#) [TC6501P105VCTTR](#)  
[TC6501P125VCTTR](#) [MCP9802A0T-M/OT](#) [MCP9803T-M/SN](#) [MCP9843-BEST](#) [TC6501P115VCTTR](#) [TC6502P065VCTTR](#)  
[ADM1023ARQZ-REEL](#) [ADM1024ARUZ-REEL](#) [ADM1032ARMZ-1RL](#) [AT30TS74-U1FMBB-T](#) [AT30TS74-U1FMAB-T](#) [AT30TS74-](#)  
[U1FMCB-T](#) [AT30TS74-U1FMDB-T](#) [ADT7483AARQZ-RL](#) [ADT7481ARMZ-REEL](#) [ADT7463ARQZ-REEL](#) [MCP98243T-BEMNY](#)  
[MCP98243T-BE/MC](#) [66L080-0226](#) [MAX31820MCR+T](#) [MAX1452CAEC8H](#) [DS1780E](#) [TMP05BKSZ-REEL7](#) [5962-8757103XA](#) [WTK-14-](#)  
[36/N](#) [E52-CA6D-N 4M](#) [MCP98244T-BEMNY](#) [MCP9802A5T-MOT](#) [MAX6581TG9A+T](#) [DS75S-C11+T&R](#) [S-58LM20A-I4T1U](#)  
[MAX6501UKP120+T](#) [MCP98243T-BE/ST](#) [AT30TS01-MAA5M-T](#) [NCT375DR2G](#) [DS18S20-SL+T&R](#)