


Data Sheet

Recommended Application: Universal

Alkaline
4901

Type Designation	4901
Designation IEC System	LR1 Zn-MnO ₂ (Alkaline)
Shelf Life (Coding)*	5 years
Nominal Voltage [V]	1.5
Typical Capacity C [mAh]	880 (load 300 Ω at 20°C down to 0.9V)
Permissible Temperature Range	- 10 °C ... 50 °C
Weight, approx. [g]	10
Volume [ccm]	3

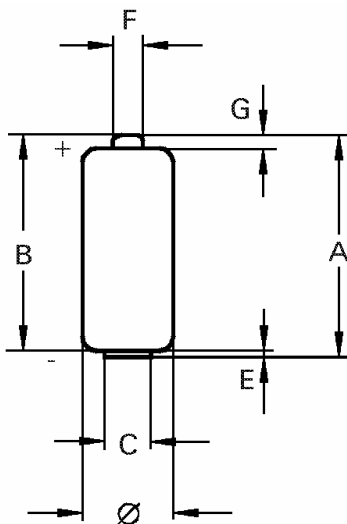

Dimensions [mm]

	min:	max:
Ø	10.9	12.0
A	-	30.2
B	29.1	-
C	5.0	-
E	-	0.2
F	-	4.0
G	0.5	-

Typical Capacities (at 20°C)

Discharge Type	Load	End Voltage[V]	1.0	0.9
Portable Lighting 5m/d, 7d/w	5.1 Ω	Time [m]	125.00	160.00
		Capacity [Ah]	0.50	0.61
		Energy [Wh]	0.60	0.72
Discharge Type	Load	End Voltage[V]	1.1	0.9
Hearing Aids 12h/d, 7d/w	300 Ω	Time [h]	175.00	210.00
		Capacity [Ah]	0.76	0.88
		Energy [Wh]	1.00	1.12

* In consideration of typical loss of capacity at storage and application.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [varta](#) manufacturer:

Other Similar products are found below :

[56456 702 099](#) [18750](#) [4114 210 501](#) [4610 726 406](#) [4122 210 511](#) [LCD-CHARGER + 4XAA 2400MAH](#) [449915B](#) [4607 726 406](#)
[55171403014](#) [55625603059](#) [55615602940](#) [4112101411](#) [4 022 211 111](#) [4 106 101 436](#) [4 020 211 111](#) [MINI CHARGER + 2XAA 2100MAH](#)
[MINI-CHARGER](#) [17730](#) [LCD-SMART-CHARGER](#) [414086X](#) [POCKET-CHARGER + 4XAA 2100MAH](#) [458980A](#) [LCD MULTI](#)
[CHARGER](#) [CG511-150-PB](#) [EE UNIVERSAL CHARGER](#) [CG401D-050-PB](#) [CG511-050-PB](#) [CU303-018-PB](#) [413675G](#) [CG381D-G-100-PB](#)
[CU202-030-PB](#) [55615603059](#) [CG381D-G-150-PB](#) [CG481G-050-PB](#) [CU303-030-PB](#) [CG511D-030-PB](#) [CA317-PB](#) [CU201G-B-030-PB](#)
[095668F](#) [4600 726 406](#) [CA418-PB](#) [CG481G-030-PB](#) [CG511D-100-PB](#) [CG511-030-PB](#) [CG511D-150-PB](#) [CG381D-G-050-PB](#) [CU302-030-](#)
[PB](#) [CG341-030-PB](#) [CU201G-B-050-PB](#) [CA089-PB](#)