

Chip Inductors - 1812CS (4532)



- Higher SRF values than 1812 size parts with ferrite cores
- 5% tolerances for all values
- 19 inductance values from 1.0 to 33 μ H

Request free evaluation samples by contacting Coilcraft or visiting www.coilcraft.com.

Part number ¹	Inductance ² (μ H)	Percent tolerance ³	Q min ⁴	SRF min ⁵ (MHz)	DCR max ⁶ (Ohms)	Irms ⁷ (mA)
1812CS-102XJE_	1.0 @ 7.9 MHz	5	60 @ 50 MHz	310	1.2	480
1812CS-122XJE_	1.2 @ 7.9 MHz	5	62 @ 50 MHz	230	1.2	480
1812CS-152X_E_	1.5 @ 7.9 MHz	5,2	65 @ 50 MHz	210	1.6	430
1812CS-182XJE_	1.8 @ 7.9 MHz	5	68 @ 50 MHz	190	2.0	380
1812CS-222X_E_	2.2 @ 7.9 MHz	5,2	63 @ 50 MHz	170	2.2	340
1812CS-272X_E_	2.7 @ 7.9 MHz	5,2	63 @ 50 MHz	160	3.2	300
1812CS-332X_E_	3.3 @ 7.9 MHz	5,2	65 @ 50 MHz	145	3.8	270
1812CS-392X_E_	3.9 @ 7.9 MHz	5,2	69 @ 50 MHz	130	5.0	240
1812CS-472XJE_	4.7 @ 7.9 MHz	5	63 @ 50 MHz	115	5.4	230
1812CS-562XJE_	5.6 @ 7.9 MHz	5	59 @ 50 MHz	100	5.7	220
1812CS-682XJE_	6.8 @ 7.9 MHz	5	60 @ 50 MHz	90	6.6	210
1812CS-822X_E_	8.2 @ 7.9 MHz	5,2	47 @ 50 MHz	80	7.0	200
1812CS-103XJE_	10 @ 7.9 MHz	5	36 @ 50 MHz	70	7.7	190
1812CS-123XJE_	12 @ 2.5 MHz	5	35 @ 10 MHz	60	8.7	180
1812CS-153X_E_	15 @ 2.5 MHz	5,2	34 @ 10 MHz	50	9.6	170
1812CS-183XJE_	18 @ 2.5 MHz	5	30 @ 10 MHz	45	10.5	160
1812CS-223X_E_	22 @ 2.5 MHz	5,2	32 @ 10 MHz	40	11.5	155
1812CS-273XJE_	27 @ 2.5 MHz	5	29 @ 10 MHz	30	12.5	150
1812CS-333X_E_	33 @ 2.5 MHz	5,2	20 @ 10 MHz	20	13.5	145

1. When ordering, specify **tolerance, termination and packaging** codes:

1812CS-333XGEC

- Tolerance:** **G** = 2% **J** = 5% (Table shows stock tolerances in bold.)
- Termination:** **E** = Halogen free component. RoHS compliant silver-palladium-platinum-glass frit terminations.
L = RoHS compliant, not halogen-free. Silver-palladium-platinum-glass frit terminations.
 Special order: **T** = RoHS tin-silver-copper (95.5/4/0.5) or **S** = non-RoHS tin-lead (63/37).
- Packaging:** **C** = 7" machine-ready reel. EIA-481 embossed plastic tape (600 parts per full reel).
B = Less than full reel. In tape, but not machine ready. To have a leader and trailer added (\$25 charge), use code letter C instead.
D = 13" machine-ready reel. EIA-481 embossed plastic tape. Factory order only, not stocked (2200 parts per full reel).

- Inductance measured using a Coilcraft SMD-A fixture in an Agilent/HP 4286A impedance analyzer with Coilcraft-provided correlation pieces.
- Tolerances in bold are stocked for immediate shipment.
- Q measured using an Agilent/HP 4291A with an Agilent/HP 16193 test fixture.
- SRF measured using an Agilent/HP 8753D network analyzer and a Coilcraft SMD-D test fixture.
- DCR measured on a Cambridge Technology micro-ohmmeter and a Coilcraft CCF859 test fixture.
- Current that causes a 15°C temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings.
- Electrical specifications at 25°C.

Refer to [Soldering Coilcraft Components](#) before soldering.

Refer to [RF Inductors - Color Coding](#) for the explanation of color dots.

Designer's Kit C337 contains 10 of each 5% part

Core material Ceramic

Environmental RoHS compliant, halogen free

Terminations Silver-palladium-platinum-glass frit. Other terminations available at additional cost.

Weight 109 – 128 mg

Ambient temperature -40°C to +125°C with Irms current

Maximum part temperature +140°C (ambient + temp rise).

Storage temperature Component: -40°C to +140°C.

Tape and reel packaging: -40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Temperature Coefficient of Inductance (TCL) +25 to +125 ppm/°C

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Failures in Time (FIT) / Mean Time Between Failures (MTBF)

One per billion hours / one billion hours, calculated per Telcordia SR-332


Packaging 600 per 7" reel; 2200 per 13" reel. Plastic tape: 12 mm wide, 0.3 mm thick, 8 mm pocket spacing, 3.7 mm pocket depth

PCB washing Tested to MIL-STD-202 Method 215 plus an additional aqueous wash. See [Doc787_PCB_Washing.pdf](#).



S-Parameter files
ON OUR WEB SITE
SPICE models
ON OUR WEB SITE

Chip Inductors - 1812CS Series (4532)

Typical Q vs Frequency

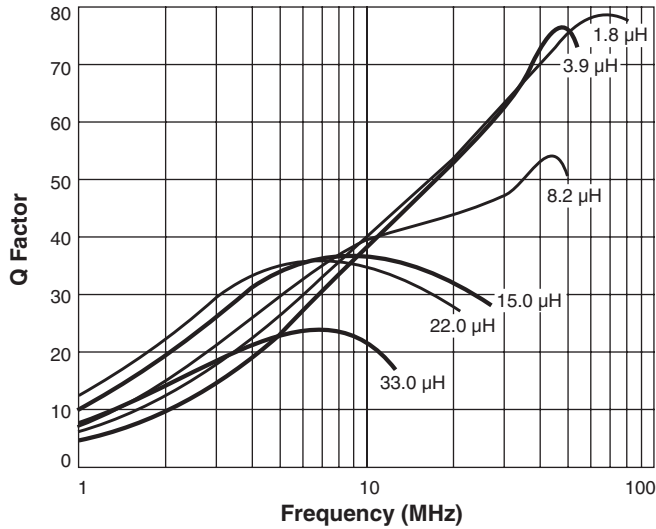

Typical L vs Frequency

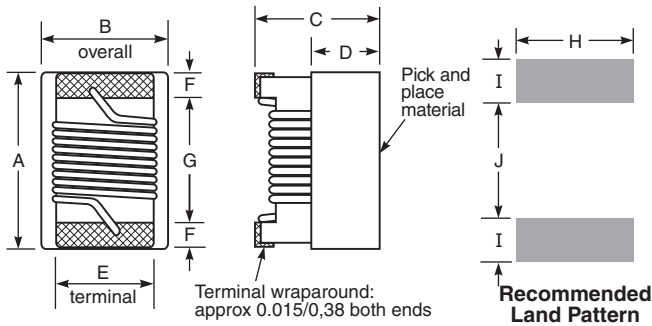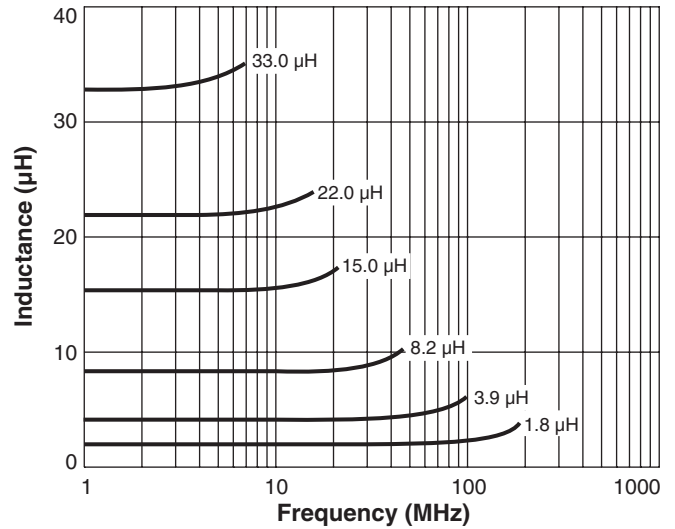

A	B	C	D	E	F	G	H	I	J
max	max	max	ref						
0.195	0.150	0.135	0.070	0.100	0.025	0.128	0.120	0.045	0.118
4,95	3,81	3,43	1,78	2,54	0,64	3,25	3,05	1,14	3,00

Note: Height dimension (C) is before optional solder application. For maximum height dimension including solder, add 0.006 in / 0,152 mm.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Coilcraft](#) manufacturer:

Other Similar products are found below :

[MLZ1608M6R8WTD25](#) [MLZ1608N6R8LT000](#) [MLZ1608N3R3LTD25](#) [MLZ1608N3R3LT000](#) [MLZ1608N150LT000](#)
[MLZ1608M150WTD25](#) [MLZ1608M3R3WTD25](#) [MLZ1608M3R3WT000](#) [MLZ1608M150WT000](#) [MLZ1608A1R5WT000](#)
[MLZ1608N1R5LT000](#) [B82432C1333K000](#) [PCMB053T-1R0MS](#) [PCMB053T-1R5MS](#) [PCMB104T-1R5MS](#) [CR32NP-100KC](#) [CR32NP-151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#)
[CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#)
[MGDQ4-00004-P](#) [MGDU1-00016-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [PM06-2N7](#) [PM06-39NJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC8-1R2-R](#)