

# RS1A-A THRU RS1M-A

## 1.0A Surface Mount Fast Recovery Rectifiers-50-1000V

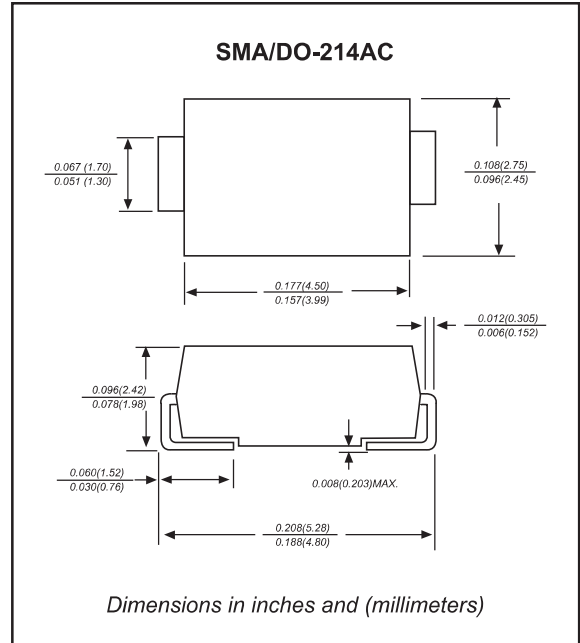
### Features

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ For surface mounted applications
- ◆ Fast switching for high efficiency
- ◆ Low reverse leakage
- ◆ Built-in strain relief, ideal for automated placement
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 250°C/10 seconds at terminals
- ◆ Glass passivated chip junction
- ◆ Compliant to RoHS Directive 2011/65/EU
- ◆ Compliant to Halogen-free

### Mechanical data

- ◆ **Case:** JEDEC DO-214AC molded plastic body
- ◆ **Terminals:** Solder plated, solderable per MIL-STD-750, Method 2026
- ◆ **Polarity:** Color band denotes cathode end
- ◆ **Mounting Position:** Any

### Package outline



### Maximum ratings and Electrical Characteristics (AT T<sub>A</sub>=25°C unless otherwise noted)

| PARAMETER                  | CONDITIONS   | Symbol           | MIN. | TYP. | MAX. | UNIT |
|----------------------------|--|------------------|------|------|------|------|
| Forward rectified current  | See Fig.2  | I <sub>O</sub>   |      |      | 1.0  | A    |
| Forward surge current      | 8.3ms single half sine-wave (JEDEC methode)              | I <sub>FSM</sub> |      |      | 30   | A    |
| Reverse current            | V <sub>R</sub> = V <sub>RRM</sub> T <sub>A</sub> = 25°C  | I <sub>R</sub>   |      |      | 5.0  | μA   |
|                            | V <sub>R</sub> = V <sub>RRM</sub> T <sub>A</sub> = 100°C |                  |      |      | 50   |      |
| Thermal resistance         | Junction to ambient<br>NOTE 1                            | R <sub>θJA</sub> |      | 50   |      | °C/W |
| Diode junction capacitance | f=1MHz and applied 4V DC reverse voltage                 | C <sub>J</sub>   |      | 15   |      | pF   |
| Storage temperature        |  | T <sub>STG</sub> | -65  |      | +150 | °C   |

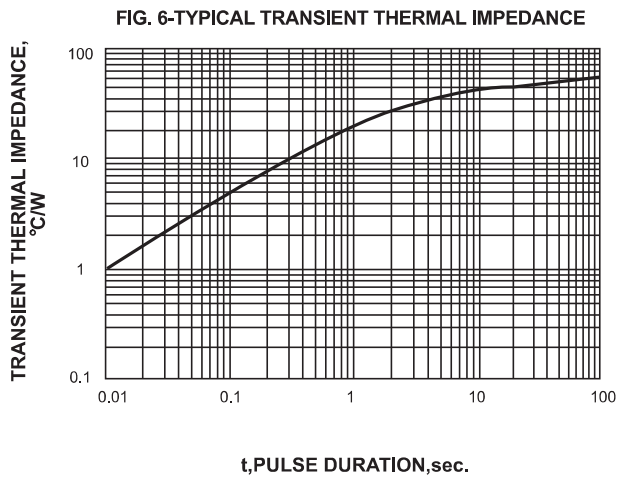
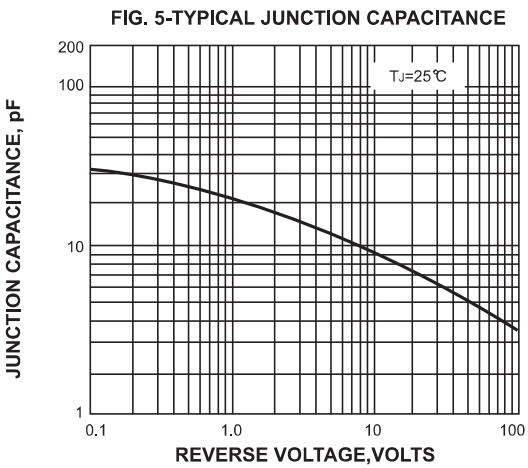
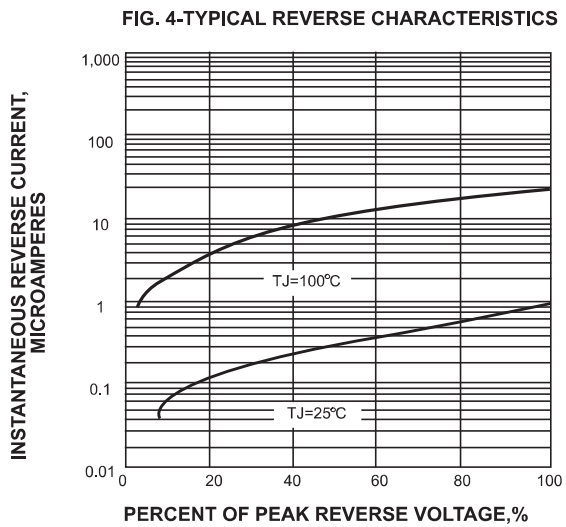
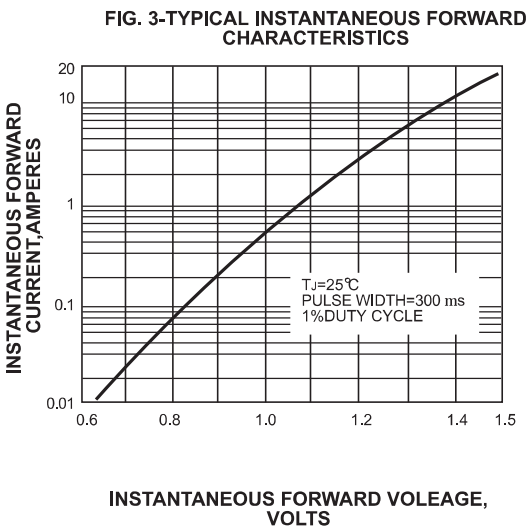
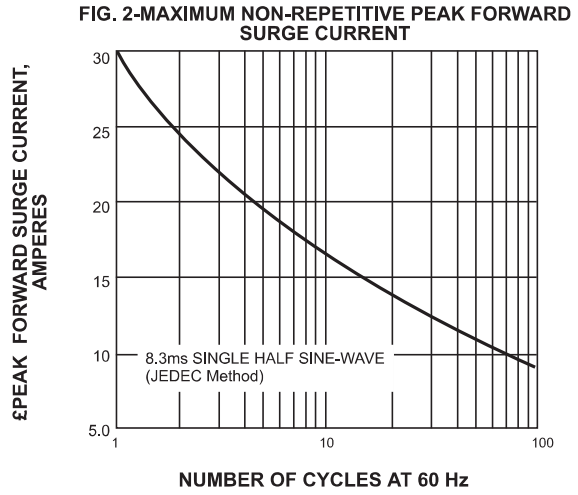
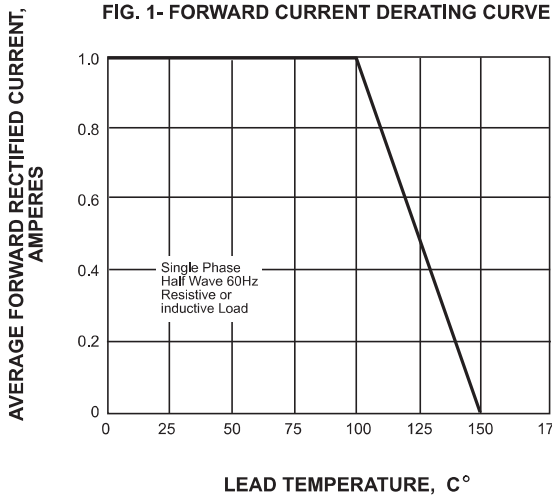
| SYMBOLS | V <sub>RRM</sub> <sup>*1</sup><br>(V) | V <sub>RMS</sub> <sup>*2</sup><br>(V) | V <sub>R</sub> <sup>*3</sup><br>(V) | V <sub>F</sub> <sup>*4</sup><br>(V) | t <sub>rr</sub> <sup>*5</sup><br>(ns) | Operating temperature<br>T <sub>J</sub> (°C) |
|---------|---------------------------------------|---------------------------------------|-------------------------------------|-------------------------------------|---------------------------------------|--|
| RS1A-A  | 50                                    | 35                                    | 50                                  | 1.30                                | 150                                   | -55 to +150                                  |
| RS1B-A  | 100                                   | 70                                    | 100                                 |                                     |                                       |  |
| RS1D-A  | 200                                   | 140                                   | 200                                 |                                     |                                       |  |
| RS1G-A  | 400                                   | 280                                   | 400                                 |                                     | 250                                   |  |
| RS1J-A  | 600                                   | 420                                   | 600                                 |                                     |                                       |  |
| RS1K-A  | 800                                   | 560                                   | 800                                 |                                     |                                       |  |
| RS1M-A  | 1000                                  | 700                                   | 1000                                | 500                                 |                                       |  |

- \*1 Repetitive peak reverse voltage
- \*2 RMS voltage
- \*3 Continuous reverse voltage
- \*4 Maximum forward voltage@I<sub>F</sub>=1.0A
- \*5 Maximum Reverse recovery time, note 2

Note: 1.P.C.B. mounted with 0.2x0.2"(5.0x5.0mm) copper pad areas  
2. Reverse recovery time test condition, I<sub>F</sub>=0.5A, I<sub>R</sub>=1.0A, I<sub>RR</sub>=0.25A



RS1A-A THRU RS1M-A

Rating and characteristic curves

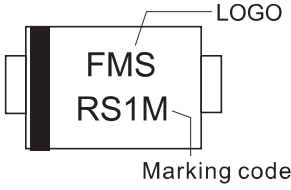


# RS1A-A THRU RS1M-A

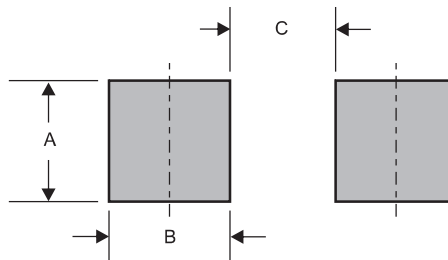
## Pinning information

| Pin                        | Simplified outline   | Symbol  |
|----------------------------|--|---|
| Pin1 cathode<br>Pin2 anode |  |  |

## Marking

| Type number | Marking code | Example   |
|-------------|--------------|---|
| RS1A-A      | RS1A         |  |
| RS1B-A      | RS1B         |   |
| RS1D-A      | RS1D         |   |
| RS1G-A      | RS1G         |   |
| RS1J-A      | RS1J         |   |
| RS1K-A      | RS1K         |   |
| RS1M-A      | RS1M         |   |

## Suggested solder pad layout



Dimensions in inches and (millimeters)

| PACKAGE | A            | B            | C            |
|---------|--------------|--------------|--------------|
| SMA     | 0.110 (2.80) | 0.063 (1.60) | 0.087 (2.20) |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Rectifiers](#) category:*

*Click to view products by [Formosa](#) manufacturer:*

Other Similar products are found below :

[70HFR40](#) [FR105 R0](#) [RL252-TP](#) [DLA11C-TR-E](#) [DSA17G](#) [1N5397](#) [JANTX1N5634A](#) [1N4002G](#) [1N4005-TR](#) [JANS1N6640US](#) [481235F](#)  
[RRE02VS6SGTR](#) [067907F](#) [MS306](#) [US2JFL-TP](#) [A1N5404G-G](#) [CRS04\(T5L,TEMQ\)](#) [CRS12\(T5L,TEMQ\)](#) [ACGRB207-HF](#)  
[CLH07\(TE16L,Q\)](#) [CLH03\(TE16L,Q\)](#) [UES1302](#) [ACGRC307-HF](#) [ACEFC304-HF](#) [DZ-1380](#) [NTE6356](#) [NTE6359](#) [JAN1N5555](#) [85HFR60](#)  
[40HFR60](#) [70HF120](#) [85HFR80](#) [D126A45C](#) [SCF7500](#) [SCHJ22.5K](#) [SM100](#) [SCPA2](#) [SDHD5K](#) [ACGRA4001-HF](#) [D1821SH45T PR](#)  
[D1251S45T](#) [NTE6358](#) [NTE5850](#) [NTE5819](#) [NTE5837](#) [NTE5892](#) [NTE5900](#) [NTE5911](#) [NTE5915](#) [NTE5921](#)