

# 3.3V Ultra Miniature SMD HCMOS TCXO/VCTCXO



Model: FOX924 SERIES

RoHS Compliant / Pb Free

Rev. 5/8/2007

Page 1 of 2

[http://www.foxonline.com/need\\_a\\_sample.htm](http://www.foxonline.com/need_a_sample.htm)



## FEATURES

- 3.3V Operation
- 1.5mm Height Max
- HCMOS Output
- Low Cost
- Tape and Reel (2,000 pcs. STD)

## OPTIONS

- Voltage Control (FOX924E)


## • PART NUMBER SELECTION

Part Number	Model Number	Frequency Stability	Operating Temperature(°C)	Frequency Range (MHz)
718-Frequency-xxxxx	FOX924B	See table	-30 ~ +85	10.000~30.000
719-Frequency-xxxxx	FOX924E	See table	-30 ~ +85	10.000~30.000

## • ELECTRICAL CHARACTERISTICS

PARAMETERS	MAX (unless otherwise noted)
Frequency Range (Fo)	10.000 ~ 30.000 MHz
Temperature Range	
Operating (TOPR)	-30°C ~ +85°C
Storage (TSTG)	-40°C ~ +85°C
Supply Voltage (VDD)	3.3V ± 5%
Input Current (IDD)	6.0mA
Initial Frequency Tolerance @ 25°C (after 2 reflows)	±1.5PPM
Frequency Stability	
Over Temperature Range	±2.5PPM
Over Supply Voltage Change (3.3V ± 5%)	±0.3PPM
Output Voltage (HCMOS) (VOL)	0.5V
(VOH)	80% VDD Min
Output Load	15pF
Aging per year	±1.0PPM
Startup Time (Ts)	5mS Max
Pullability (Vc = 1.65 ± 1.5V)	±5.0 ~ ±15.0 PPM

All specifications subject to change without notice.

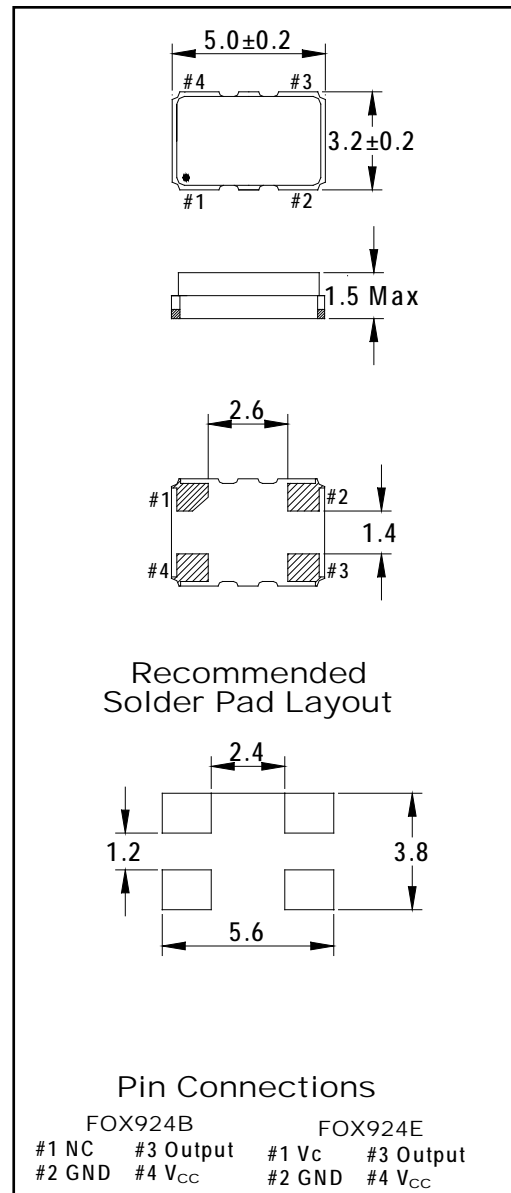

# 3.3V Ultra Miniature SMD HCMOS TCXO/VCTCXO



Model: FOX924 SERIES

RoHS Compliant / Pb Free

Rev. 5/8/2007


Page 2 of 2

[http://www.foxonline.com/need\\_a\\_sample.htm](http://www.foxonline.com/need_a_sample.htm)



• TAPE SPECIFICATIONS (millimeters)							
MODEL	A	B	C	D	E	F	STD Reel QTY
FOX924	∅1.5	4.0	8.0	5.5	12.0	1.7	2,000

• REEL SPECIFICATIONS (millimeters)							
MODEL	G	H	I	J	K	L	M
FOX924	2.0	∅13	∅21	∅80	∅254	13.5	2.0

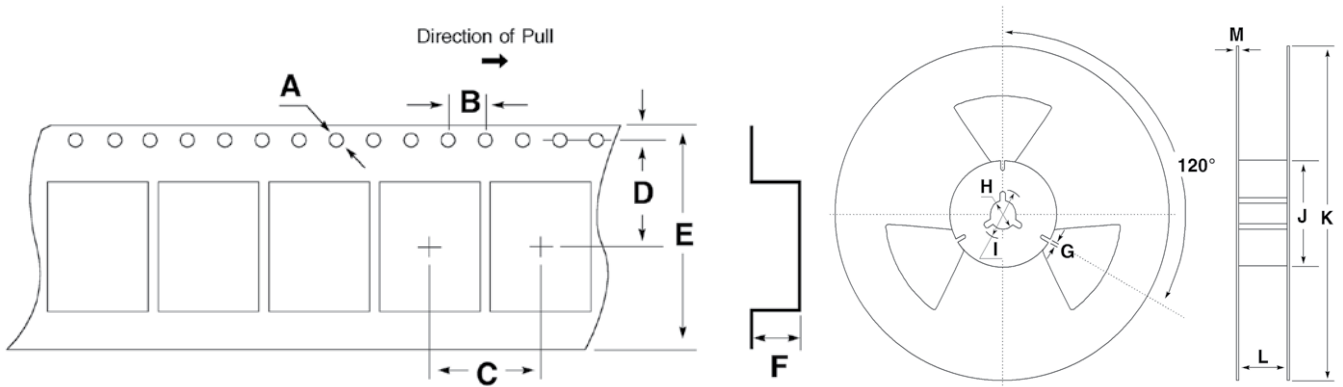

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for Fox manufacturer:*

Other Similar products are found below :

[FOXLF049-20](#) [FOXSDLF/240F-20](#) [FXO-HC736R-125](#) [FK13AEIHI0.032768](#) [FO5LSCDM100.00](#) [FOX924B-10.000](#) [FOXSDLF/240F-20/TR](#)  
[F4105R-250](#) [HC49ULF-11.0592MHZ](#) [FC4STCBMF16.0-BAG200](#) [FOXSDLF/184-20](#) [VCS25AXT-447](#) [FO7HSCAM8.0](#) [FOXLF098-20](#)  
[70M15A](#) [FO7HHAAM32.0](#) [FT5HNBPK10.0-T1](#) [FO7HHAAM20.0-BULK](#) [FY3HCJM45.1584-BULK](#) [FO7HSCDM50.0](#) [FOXSLF/120-20](#)  
[VCS25AXT-270](#) [27.000MHZ](#) [F4100-4.096MHZ](#) [FC4SDCBMF20.0-T1](#) [FOX801BELF-160](#) [FOXLF250F-20](#) [FOXSDLF/049-20/TR](#) [FXO-](#)  
[LC735RGB-156.25](#) [FOXSDLF/245FR-20/TR](#) [FOXSDLF/200-20/TR](#) [FC3VREEEM38.4-T1](#) [FOX923CH-19.20M](#) [F4105-250](#) [F535L-12](#)  
[FOXLF021S](#) [FO7HSCAE48.0-BULK](#) [F1100E-48.000MHZ](#) [FOXLF221-20](#) [NC38LF-32.768kHz](#) [FOX/073-20-LF](#) [F4105-500](#) [FXO-](#)  
[PC536R-150](#) [FOXSLF041](#) [F4100-75.00](#) [FOXLF05A](#) [NC38LF-327](#) [FXU-LC536R-212.50](#) [FKT26EIHD0.032768-BAG1K](#) [F4100-333](#) [F3340-](#)  
[2.048MHZ](#)