

**Product Summary**

Symbol	Value	Unit
$I_{T(RMS)}$	12	A
$V_{DRM} V_{RRM}$	600 / 800	V
$V_{TM}$	1.55	V


**Feature**

With high ability to withstand the shock loading of large current, With high commutation performances, 4 quadrants products especially recommended for use on inductive load.

**Application**


Washing machine, vacuums, massager, solid state relay, AC Motor speed regulation and so on.

**Package**

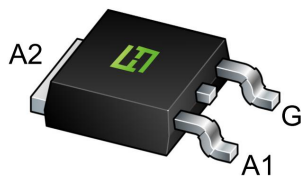


**TO-252AB**

**Circuit diagram**

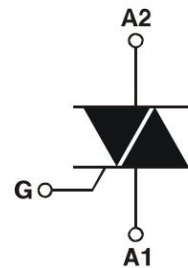

**Marking**



### Absolute maximum ratings (Ta=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit	
Repetitive peak off-state voltage	$V_{DRM}$	600 / 800	V	
Repetitive peak reverse voltage	$V_{RRM}$	600 / 800	V	
RMS on-state current	$I_{T(RMS)}$	12	A	
Non repetitive surge peak on-state current (full cycle, F=50Hz)	$I_{TSM}$	95	A	
$I^2t$ value for fusing (tp=10ms)	$I^2t$	45	A <sup>2</sup> s	
Critical rate of rise of on-state current ( $I_G = 2 \times I_{GT}$ )	$di_T/dt$	I - II - III	50	A/ $\mu$ s
		IV	10	
Peak gate current	$I_{GM}$	2	A	
Average gate power dissipation	$P_{G(AV)}$	0.5	W	
Junction Temperature	$T_J$	-40 ~ +125	°C	
Storage Temperature	$T_{STG}$	-40 ~ +150	°C	

### Electrical characteristics (TA=25°C, unless otherwise noted)

Parameter	Symbol	Test Condition	Value	Unit		
Gate trigger current	$I_{GT}$	$V_D = 12V$ $I_T = 0.1A$ $T_J = 25^\circ C$	I - II - III	10	mA	
			IV	25		
Gate trigger voltage	$V_{GT}$	I - II - III - IV	MAX.	1.3	V	
Gate non-trigger voltage	$V_{GD}$	$V_D = V_{DRM}$ $T_J = 125^\circ C$	MIN.	0.2	V	
latching current	$I_L$	$V_D = 12V$ $I_{GT} = 0.1A$ $T_J = 25^\circ C$	I - III - IV	30	mA	
			II	40		
Holding current	$I_H$	I - II - III - IV	MAX.	30	mA	
Critical-rate of rise of commutation voltage	$dV_D/dt$	$V_D = 2/3V_{DRM}$ Gate Open $T_J = 125^\circ C$	MIN.	20	V/ $\mu$ s	
<b>STATIC CHARACTERISTICS</b>						
Forward "on" voltage	$V_{TM}$	$I_{TM} = 15A$ tp=380 $\mu$ s	MAX.	1.55	V	
Repetitive Peak Off-State Current	$I_{DRM}$	$V_D = V_{DRM}$ $V_R = V_{RRM}$	MAX.	$T_J = 25^\circ C$	10	$\mu$ A
Repetitive Peak Reverse Current	$I_{RRM}$			$T_J = 125^\circ C$	1	mA
<b>THERMAL RESISTANCES</b>						
Thermal resistance	$R_{th(j-c)}$	Junction to case(AC)	TYP.	1.4	°C/W	
	$R_{th(j-a)}$	Junction to ambient	TYP.	70	°C/W	

**Typical Characteristics**

FIG.1: Maximum power dissipation versus RMS on-state current (full cycle)

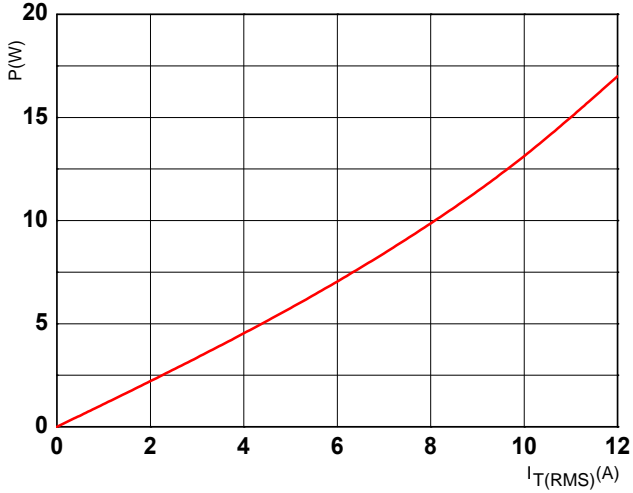


FIG.2: RMS on-state current versus case temperature (full cycle)

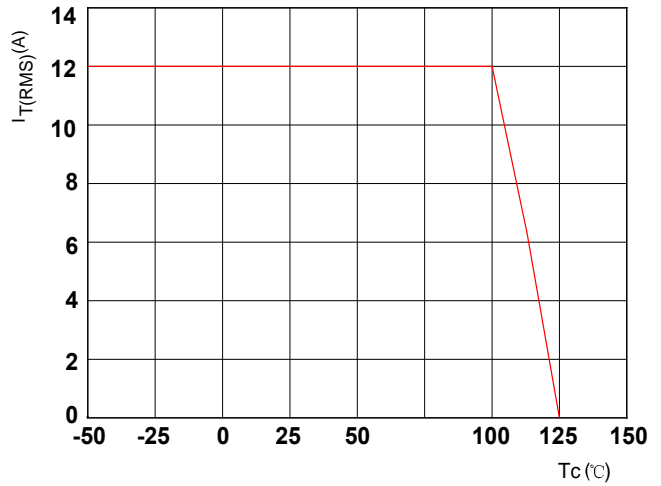


FIG.3: Surge peak on-state current versus number of cycles

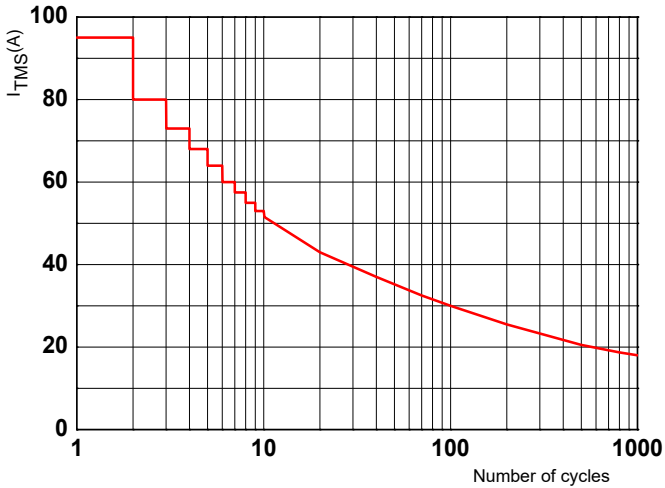


FIG.4: On-state characteristics (maximum values)

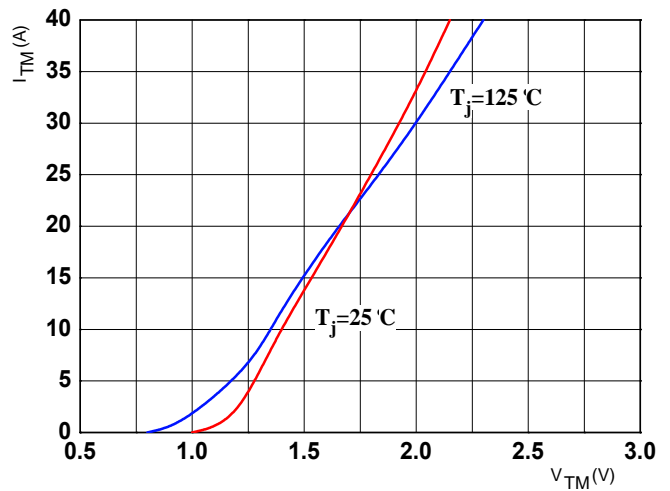


FIG.5: Non-repetitive surge peak on-state current for a sinusoidal pulse with width  $t_p < 10\text{ms}$



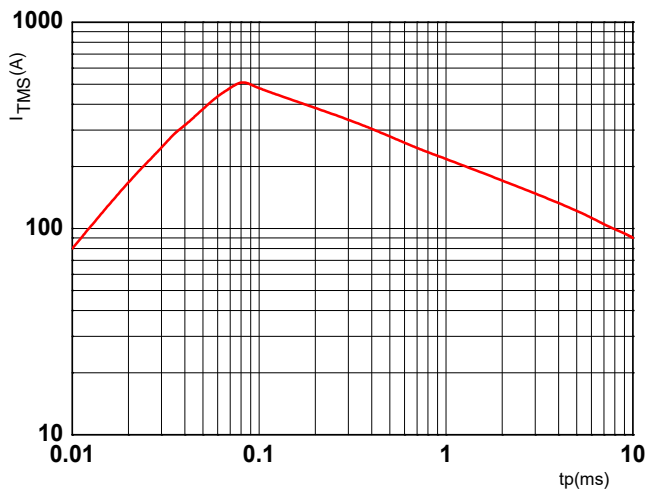



FIG.6: Relative variations of gate trigger current, holding current and latching current versus junction temperature (typical values)

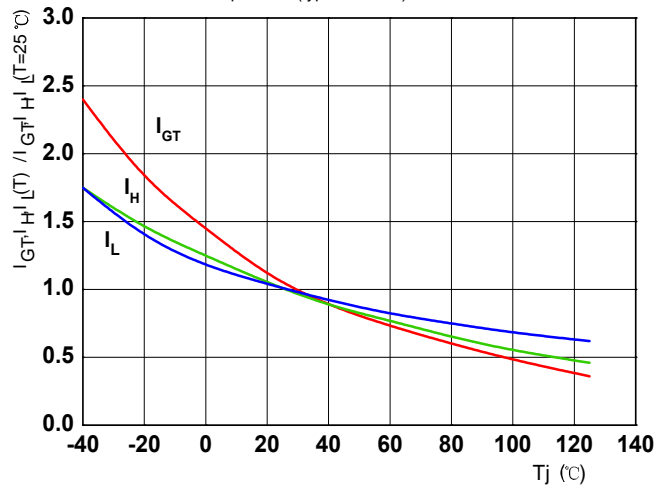

**Ordering Information**

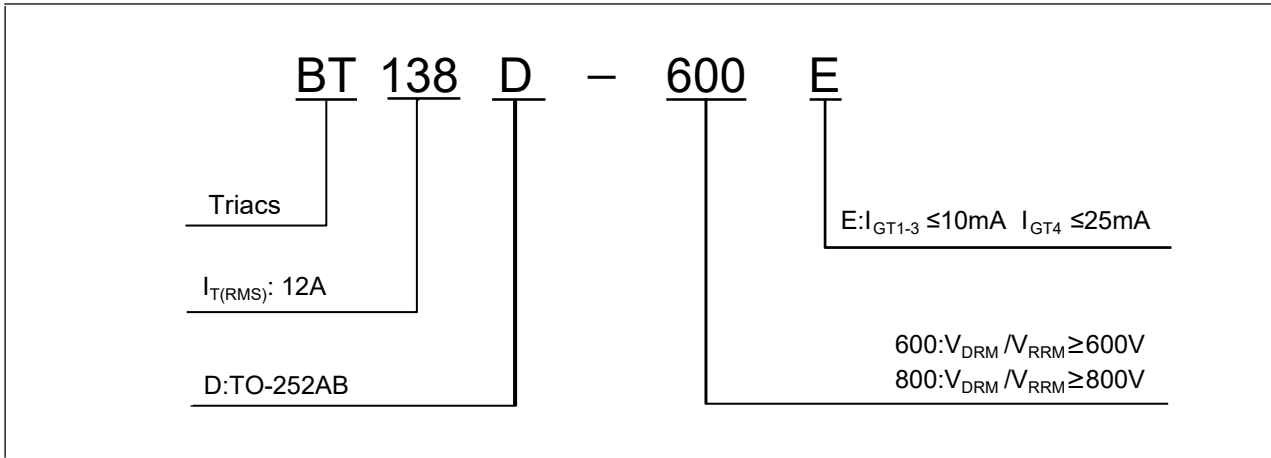

**TO-252AB Package Information**

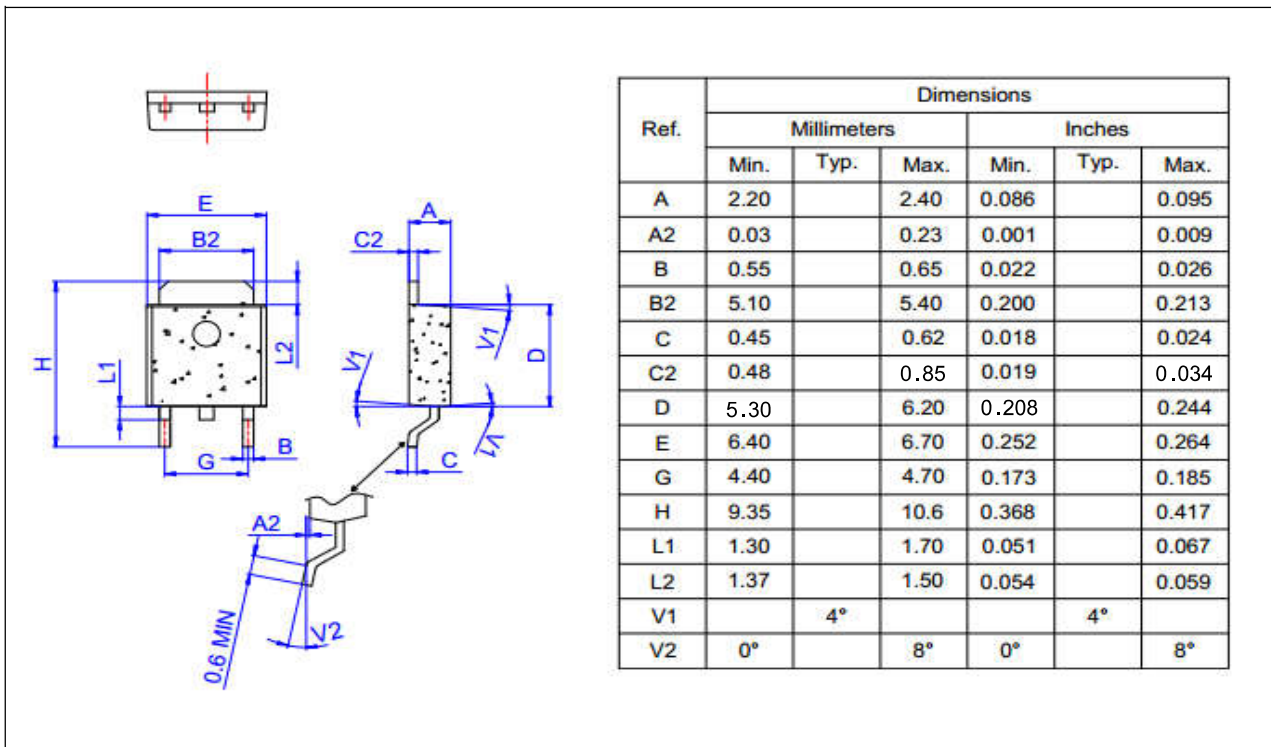

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Triacs](#) category:*

*Click to view products by [FUXINSEMI](#) manufacturer:*

Other Similar products are found below :

[BT137-600-0Q](#) [OT415Q](#) [2N6075A](#) [NTE5688](#) [BTA2008W-800D,135](#) [D31410](#) [BT136-600,127](#) [BT137B-800,118](#) [BTA140-600,127](#)  
[BTA208-800B,127](#) [MAC97A6,116](#) [BTA420-800BT,127](#) [BTA201W-800E,115](#) [BTA212B-800B,118](#) [BTA41-800BRG](#) [TMA164P-L](#)  
[TMA166P-L](#) [TMA54S-L](#) [BT137-600E,127](#) [BTA140-800,127](#) [BTA30-600CW3G](#) [BTB16-600CW3G](#) [TMA84S-L](#) [Z0109MN,135](#) [T825T-6I](#)  
[T1635T-6I](#) [T1220T-6I](#) [NTE5638](#) [ACST1235-8FP](#) [BT134-600D,127](#) [BT134-600G,127](#) [BT136X-600E,127](#) [BT139X-800,127](#) [BTA204X-](#)  
[800C,127](#) [BTA208X-1000C0,127](#) [BTA216-600E,127](#) [BTA316X-600E/DG,12](#) [BTA316X-800C,127](#) [BT134-600D,127](#) [BT134-600E,127](#)  
[BT137X-600D,127](#) [BT139X-600E,127](#) [BTA08-600BW3G](#) [BTA201-800ER,126](#) [BTA208X-1000B,127](#) [BTA316X-800E,127](#) [NTE56008](#)  
[NTE56017](#) [NTE56018](#) [NTE56059](#)